




Phone 08 9446 6333 Fax 08 9446 8865 Email: hardware@galvinhw.com.au Web: www.galvinhw.com.au

GALVIN LED CABINET LIGHTING

AKIS-R Recessed spot light

Features:

- Lightweight plastic body with acrylic optic lens
- Ultra-Slim profile – 9.5mm installation depth
- Easy clip-in installation – no screws
- Low power consumption – yet impressive lighting performance
- Latest design for under cabinet and showcase applications
- 12V DC 1.7 watts total for 24 pieces of SMD LED’s
- Available in 2 whites – Cool White: 5000~6300K
Warm White: 2750~3250K

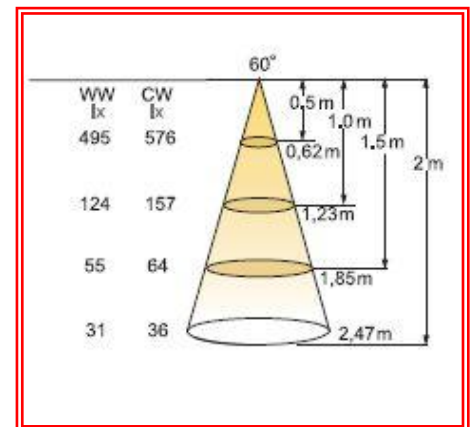

Supplied with 2 metres of fig 8 cable with quick connector fitting to suit driver connector

Galvin Code	Description	Lamp colour	Bezel Colour
LEDSPOTCCW	1068.010.CCE.05 55mm recess required	Cool white	CHROME
LEDSPOTCWW	1068.010.CWE.05 55mm recess required	Warm white	CHROME
LEDSPOTMCW	1068.010.CCE.13 55mm recess required	Cool white	MATT CHROME
LEDSPOTMWW	1068.010.CWE.13 55mm recess required	Warm white	MATT CHROME

See page 2 for power supply / LED driver details

Osborne Park: 39 Howe Street.	Ph 08 9446 6333 Fax 08 9446 8865
Bunbury: 12 Sylvan Way	Ph 08 9725 4812 Fax 08 9725 4809
O'Connor: 11 Zeta Cres	Ph 08 9331 3688 Fax 08 9331 1503
Wangara: U-2 6 Ismail Street	Ph 08 9309 6333 Fax 08 9309 6899
Thebarton: 14 Murray Street	Ph 08 8352 1888 Fax 08 8352 1666
Lonsdale: 1 Bristol Court	Ph 08 8186 1888 Fax 08 8186 1666

GALVIN LED CABINET LIGHTING

Galvin Item Code: LEDDRIVER1210

Constant Voltage LED Driver for AKIS-R LED spot light
Model: RDL-D-VU8312-03-TOP-6P

Features:

Lightweight plastic body with power cord and fitted Australian 3 pin plug

Input: 100 – 240 Volt AC 50/60Hz
via 1.8 metre power cord fitted with Australian 3 pin plug.

Output: Constant Voltage 12V DC
Maximum Power 10 Watt – 830mA
via 150mm cable and 6 way TOP Connector Box
for parallel connections

Ultra-Slim profile – 90mm x 50mm x 30mm
Suitable for mouse-hole installations

Easy clip-in connector box – pre-installed on driver

Concealed screw terminals at both input and output sides

Low power consumption – yet impressive performance

WARNING: Will only operate maximum of 5 light units AKIS-R

IP Protection: IP20 – for indoor use only



End of document.