



WALLMATES™

Wallmates - Metal

Self drilling plasterboard anchor for walls with cavities.

Features

- ~ Self drilling - can be installed without the use of power tools.
- ~ The screw can be removed without losing the anchor within the cavity.
- ~ All metal anchor, will not shrink or degrade through U.V. exposure.
- ~ Centre drill point enables straight fix into plasterboard.

Materials

Body: Zinc composite die cast
Screw: Carbon steel



Wallmates - Nylon

Self drilling plasterboard anchor for walls with cavities.

Features


- ~ Non-conductive, ideal for the electrical industry
- ~ Self drilling, easy to install
- ~ Screw can be removed without losing the anchor within the cavity
- ~ Centre drill point enables straight fix into plasterboard.

Materials

Glass reinforced nylon.



WALLMATES - METAL

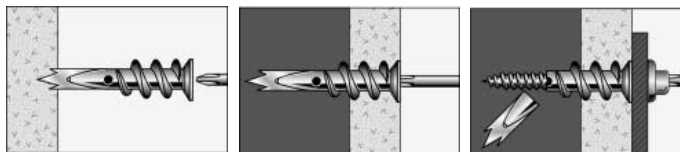


1. Place on the end of your Phillips head screwdriver and then lightly pierce the plaster-board face paper where the anchor is to be fixed.

2. Only light pressure is required. Simply screw the Wall-Mate into the plasterboard.

3. Now using an 8 gauge screw through fixture, screw into the Wall-Mate.

WALLMATES - NYLON

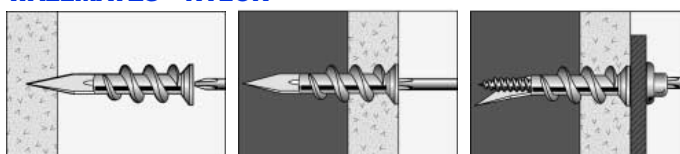

1. Lightly pierce the plasterboard face paper with the Wall Mate.

2. Wall Mate will easily screw into the plasterboard. Screws up tight for a smooth, flush finish.

3. Secure the fitting with a 6-7 gauge screw. The "push away" point allows any length screw to be used.

ANCHOR DETAILS

Description	Screw Gauge	Min Screw Length (mm)	Rec. Working Loads (Kn) 10mm Plasterboard	Quantity Per Box	Order No.
Metal	8	20mm	0.10	100	WMZ
Nylon	6-7		0.10	100	WM25