

# 90cm Slideout RANGEHOOD

PRODUCT CODE: **ERH900SLX2**



## FEATURES:

- + 40mm stainless steel front panel fitted
- + Front vent recirculating option
- + Optional 80mm stainless steel panel included
- + 3 speed twin motor
- + Extraction Capacity: 440cbm/h
- + 2 x 1.5W LED lights
- + 2 x Carbon filters fitted on motors (can be removed)
- + Silver finish bottom base
- + 2 x aluminum mesh filters
- + 120mm air flow outlet
- + Decibel rating 49-58 dBA

### 3 SPEED MOTOR

This range hood provides the option of 3 different speed levels ensuring you have the option to use your range hood at a low, medium or high level of operation.

### EXTRACTION CAPACITY

The extraction rate of 440m<sup>3</sup>/h provides strength and power to this stylish range hood.

### QUIET NOISE LEVEL

A very quiet motor ensures the range hood has a very quiet noise level.  
Decibel Rating: 49-58 dBA

### FRONT VENT RECIRCULATING OPTION

This range hood provides with two different sizes of panels to be suitable for ducted or recirculating style. You have the option to choose whichever suits your need and style.



eurocooking



Warranty

## HELPFUL TIPS

- + Leave your rangehood on for 15 minutes after the cooking of the food to remove all odors, steam etc.
- + The dishwasher-safe cassette filters need to be cleaned after approximately 2 months of standard operation
- + It is recommended that the rangehood be installed between 650mm and 750mm above the cooktop
- + It is also recommended that fumes from the rangehood be ducted out into the atmosphere.
- + Turn off the rangehood before attempting to clean


## INSTALLATION

Installation is recommended by a qualified installer, please refer to the product manual for full installation instructions.


## FILTER CLEANING INFORMATION

Cassette mesh filter: Requires cleaning monthly. This will ensure no interruptions with airflow operation.

### Standard Installation Sizing

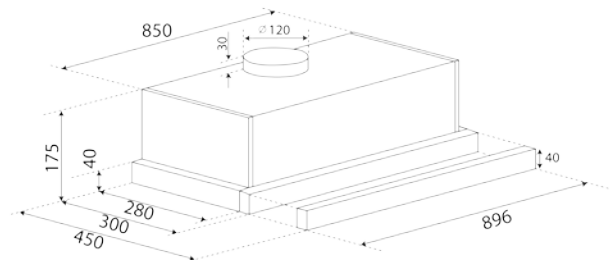

### Front Vent Recirculating Sizing

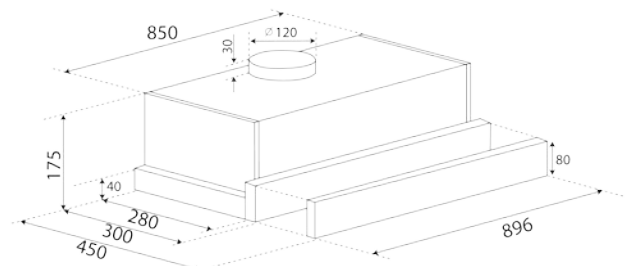

<b>Electrical Requirements</b>	Rangehood is supplied with 10amp cord & plug.
<b>Decibel Rating</b>	Speed 1 - 48 dBA    Speed 2 56 dBA
<b>Available Ventilation Kits</b>	RHKE65EU    Wall – Eave vent kit RHKMR65EU    Universal metal roof kit (includes flashing) RHKTR65EU    Universal tile roof kit (includes flashing)
<b>Carbon Filter</b>	CF110 (requires 2) (Packaging comes with x2 carbon filters fitted on motors )
<b>Barcode</b>	<b>9347726027852</b>