



COLLECTION
2020

Pellegrino Artusi



PASSION & PRECISION

EXPLORE THE ART OF LIVING

COOK

Ovens	60cm built-in compact/steam 70/90cm built-in double built-in warming drawer	8
Cooktops	domino cooktops gas cooktops ceramic cooktops	28
Freestanding Cookers	Maximus series Vulcan series	46
Microwave Ovens	microwave oven convection microwave oven microwave oven trim-kit	66
Bench Top Solutions	mini kitchen	69

BBQ

Alfresco Kitchen	complete outdoor Alfresco kitchen solution	74
Built-in Barbecues	gas built-in BBQ	76

CHILL

Refrigeration	beverage centres, integrated refrigeration & retro-style refrigerator	78
Range Hoods	canopy concealed under-mount slide-out	90

WASH

Sinks	Granitek stainless steel	108
Tap	mixer tap	128
Dishwashers	freestanding built-in	142
Laundry	clothes dryers washing machine	150

A woman with brown hair, wearing a grey sweater over a dark top, is holding a white mug with both hands and looking down at it. The background is a blurred kitchen with a clock and various items on a shelf.

OUR PHILOSOPHY

Welcome to Artusi cooking appliances. Inspired by the legendary Pellegrino Artusi, the father of Italian cuisine, we have created our range to live up to his legacy.

Times may have changed since he wrote ‘The Science of Cooking and the Art of Eating well’ but the essence of a lovingly prepared meal bringing people together will always remain.

Our products are designed with the modern day home cook in mind. Sleek lines and high in functionality and performance. And all are made to the highest global standards and go through rigorous testing procedures.

So whether you are a casual cook or a true artist in the kitchen, we want our cookers to play a part in your enjoyment of the principles laid down by Artusi himself.



BUILT-IN OVENS


BUILT-IN OVENS

AO651X MAXIMUS SERIES

electric oven with programmable timer

- fingerprint-proof stainless steel
- cavity capacity- 65 litres gross
- 9 functions — light, top and bottom element, fan assisted, base element, half grill, grill, fan grill, fan forced, pizza
- digital timer with touch controls
- EVER-Clean enamel interior
- thermostat 0–250°C
- knob control
- triple-glazed glass door
- flat, easy-clean inner glass door
- tangential fan ventilation
- 5 cooking levels

i For technical diagrams please refer to 24-27
3.5kW/hr total electrical consumption
15 AMP electrical connection, hard wired




AO650GG MAXIMUS SERIES

gas oven with digital clock & timer

- fingerprint-proof stainless steel
- cavity capacity- 65 litres gross
- 5 functions — fan grill, static grill, fan assisted, lower flame, light
- digital clock/timer
- knob control panel
- Ultra Clean interior enamel
- 130–250°C thermostat
- 5 cooking levels
- tangential cooling fan
- triple-glazed glass door
- easy-clean inner glass door
- oven baking tray, oven shelf

i For technical diagrams please refer to 24-27
1.2 kW/hr total electrical consumption
gas rating: 2.5 kWh (natural) | 2.1 kWh (ULPG)
10 AMP electrical connection, 3-pin plug fitted



COOK



BUILT-IN OVENS

AO650X MAXIMUS SERIES

electric oven with bell timer

- fingerprint-proof stainless steel
- cavity capacity- 65 litres gross
- 9 functions — light, top and bottom element, fan assisted, base element, half grill, grill, fan grill, fan forced
- 60-minute bell timer
- EVER-Clean enamel interior
- thermostat 0–250°C
- knob control
- triple-glazed glass door
- flat, easy-clean inner glass door
- tangential fan ventilation
- 5 cooking levels

i For technical diagrams please refer to 24-27
3.5kW/hr total electrical consumption
15 AMP electrical connection, hard wired




CAO601X/2 VULCAN SERIES

electric oven with minute minder

- fingerprint-proof stainless steel
- cavity capacity- 88 litres gross
- 5 functions — light, defrost, fan forced, fan grill, top & bottom element
- 120-minute countdown timer
- oven ‘on’ indicator light
- cavity cooling system
- 5 cooking levels
- thermostat 0–250°C
- removable door
- triple-glazed glass door
- baking tray
- chrome rack

i For technical diagrams please refer to 24-27
2kW total electrical consumption
10 AMP electrical connection, 3-pin plug fitted



COOK

BUILT-IN OVENS


AO601X/I, B & W VULCAN SERIES

electric ovens with minute minder

- fingerprint-proof stainless steel or black & white glass finish
- easy installation with 10AMP 3-pin powerpoint plug fitted
- cavity capacity- 78 litres gross
- 5 functions — light, defrost, top and bottom element, fan grill, fan forced
- digital touch control clock with minute minder 0–60 min
- EVER-Clean enamel interior
- thermostat 0–250°C
- knob control
- triple glazed glass door
- full-glass inner door
- tangential fan ventilation
- 5 cooking levels
- telescopic easy-glide oven rail
- 1 x tray, 1 x chrome shelf

i For technical diagrams please refer to 24-27
2kW total electrical consumption
10 AMP 'plug and play' power point connection, 3-pin plug fitted

COOK



AO601B - Black Glass
with new round knobs



AO601W - White Glass



AO601 - Interior


BUILT-IN OVENS

AO676X & B

60cm built-in electric oven

- Glass or stainless steel models available
- 5 Functions: Convection, Fan forced, Fan grill, Defrost, Oven lamp
- Touch control digital timer
- Multi-function knob
- Knob control thermostat
- cavity capacity- 88 litres gross
- 5 chrome rack positions
- Triple layer glass door
- Removable inner glass door
- Detachable door
- EVER-Clean Active Enamel interior
- Halogen cavity lamp
- Baking tray & grill rack
- Temperature range 50°C - 250°C
- Single layer telescopic rail
- 'Plug & Play' power cord fitted (1.5m in length with 10AMP plug)

i For technical diagrams please refer to 24-27
2kW total electrical consumption
10 AMP 'plug and play' power point connection, 3-pin plug fitted



AO676B - Black Glass



AO676W - White Glass



AO676 - Interior

BUILT-IN OVENS



COOK

AOS652X

side-opening electric oven with digital timer

- fingerprint-proof stainless steel
- cavity capacity- 65 litres gross
- 9 functions —
- light, top and bottom element, fan assisted, base element, half grill, grill, fan grill, fan forced
- digital timer with touch controls
- EVER-Clean enamel interior
- thermostat 0–250°C
- knob control
- triple-glazed glass door
- side-opening reversible door
- flat, easy-clean inner glass door
- tangential fan ventilation
- 5 cooking levels

i For technical diagrams please refer to 24-27
3.5kW/hr total electrical consumption
15 AMP electrical connection, hard wired




AO654XP

pyrolytic electric oven digital timer

- stainless steel
- cavity capacity- 65 litres gross
- 10 functions —
- light, defrost, top and bottom element, eco bake, fan forced, base heat + fan, fan grill, half grill, grill, pyrolytic cleaning
- digital timer with touch controls
- EVER-Clean enamel interior
- thermostat 0–250°C
- knob control
- quadruple-glazed glass door
- flat, easy-clean inner glass door
- tangential fan ventilation
- 5 cooking levels

i For technical diagrams please refer to 24-27
3.5kW/hr total electrical consumption
15 AMP electrical connection, hard wired



BUILT-IN OVENS

COOK

CAO610 BP/XP

pyrolytic electric oven digital timer

- 11 Functions
- Available in Black glass or Stainless Steel
- Touch control digital timer
- Digital control switch
- Knob control thermostat
- cavity capacity- 88 litres gross
- 6 chrome rack positions
- Triple layer glass door
- Removable inner glass door
- Detachable door
- Active Enamel
- Halogen cavity lamp
- Baking tray & grill rack
- Temperature range 50°C - 250°C
- Pyrolytic cleaning, 1.15 hours-2 hours
- Semi-automatic & automatic function

i For technical diagrams please refer to 24-27
3.5kW/hr total electrical consumption
15 AMP electrical connection, hard wired



Provided with 2 sets of control knobs

CAO610XP - Stainless Steel




COMPACT BUILT-IN OVENS

AO45OX MAXIMUS SERIES

compact electric oven with minute timer

- fingerprint-proof stainless steel
 - cavity capacity- 43 litres gross
 - 5 functions — light, top and bottom element, grill, fan grill, fan assisted
 - minute minder
 - control knobs
 - EVER-Clean enamel cavity
 - tangential cooling fan
 - 3 cooking levels
- i

For technical diagrams please refer to 24-27
3.5kW/hr total electrical consumption
15 AMP electrical connection, hard wired



ACSO45X MAXIMUS SERIES

steam oven with grill

- stainless steel and glass exterior and stainless steel cavity
 - cavity capacity- 31 litres gross
 - 2 x control knobs
 - halogen lighting
 - steam cooking (40–130°C)
 - grill function
 - electronic timer (6 buttons, white display)
 - safe door
 - door contact switch
 - tangential cooling fan
 - 1 x shelf
 - 1 x tray
 - 1 x perforated tray
- i

For technical diagrams please refer to 24-27
3.5kW/hr total electrical consumption
15 AMP electrical connection, hard wired



COOK


WARMER DRAWER & BUILT-IN OVEN

AWD15X

warming drawer

- internal shelf surface in black tempered glass
 - preheating of pots and pans, coffee cups, dinner plates
 - maintaining the temperature of cooked foods
 - adjustable thermostat from 40– 70°C
 - operating indicator light
 - cool touch front panel
 - connection cable with plug
 - combine with all AO series ovens
- i

For technical diagrams please refer to 24-27
3.5kW/hr total electrical consumption
10 AMP lead and plug




AO75OX MAXIMUS SERIES

75cm electric oven with programmable timer

- fingerprint-proof stainless steel
 - cavity capacity- 81 litres gross
 - 9 functions —
 - light, top and bottom element, fan assisted, base element, half grill, grill, fan grill, fan forced, pizza
 - touch-control programmable oven timer
 - EVER-Clean enamel interior
 - thermostat 0–250°C
 - knob control
 - triple-glazed glass door
 - flat, easy-clean inner glass door
 - tangential fan ventilation
 - 5 cooking levels
 - chrome wire shelves
- i

For technical diagrams please refer to 24-27
3.5kW/hr total electrical consumption
15 AMP electrical connection, hard wired



COOK

BUILT-IN OVENS

COOK


AO900X MAXIMUS SERIES

90cm electric oven with programmable timer

- fingerprint-proof stainless steel
- cavity capacity- 81 litres gross
- 9 functions
- programmable touch control oven timer
- EVER-Clean enamel oven cavity
- knob controls
- triple-glazed glass door
- flat, easy-clean oven door
- tangential cooling fan
- 5 cooking levels
- baking tray
- metal grill



For technical diagrams please refer to 24-27
3.5kW/hr total electrical consumption
15 AMP electrical connection, hard wired



CAO900X/1 VULCAN SERIES

90cm built-in electric oven

- fingerprint-proof stainless steel
- cavity capacity- 100 litres gross
- 9 functions
- 120-minute timer
- EVER-Clean enamel oven cavity
- knob controls
- flat, easy-clean oven door
- triple-glazed glass door
- removable shelves
- cooling system
- turbo heating



For technical diagrams please refer to 24-27
3.5kW/hr total electrical consumption
15 AMP electrical connection, hard wired





BUILT-IN OVENS

COOK

AO960X
90cm electric oven

- metal control knobs & door handle
- black enamel interior
- full glass inner & outer door
- triple glazed glass door
- cavity capacity- 115 litres gross
- 9 functions
- programmable touch control oven timer
- EVER-Clean enamel oven cavity
- flat, easy-clean oven door
- tangential cooling fan
- 5 cooking levels
- 1 x grill pan set, 1 x grill grid

i For technical diagrams please refer to 24-27
3.5kW/hr total electrical consumption
15 AMP electrical connection, hard wired

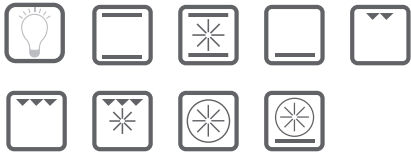


BUILT-IN OVENS

COOK

AO960B
90cm electric oven

- stainless steel control knobs
- brushed black handle
- black enamel interior
- full glass inner & outer door
- triple glazed glass door
- cavity capacity- 115 litres gross
- 9 functions
- programmable touch control oven timer
- EVER-Clean enamel oven cavity
- flat, easy-clean oven door
- tangential cooling fan
- 5 cooking levels
- 1 x grill pan set, 1 x grill grid

i For technical diagrams please refer to 24-27
3.5kW/hr total electrical consumption
15 AMP electrical connection, hard wired



BUILT-IN OVENS

CAO888X/1 VULCAN SERIES

double electric oven with digital timer

- fingerprint-proof stainless steel
- top oven: cavity capacity- 35 litres gross
- lower oven: cavity capacity- 55 litres gross
- top oven: 4 functions
- lower oven: 7 functions
- top oven: 4 cooking levels
- lower oven: 5 cooking levels
- lower oven: digital timer
- triple-glazed glass doors
- removal oven doors
- full-glass inner door
- 50–250°C thermostat
- ‘ActivEnamel’ easy-clean interior enamel
- one halogen light per cavity
- also available in Black Glass and White Glass
- Standard Accessories: 2 baking dishes, 2 oven racks, 1 grill insert

For technical diagrams please refer to 24-27
4kW/hr total electrical consumption (2kW/hr each cavity)
hard wired only



CAO888B - Black Glass




CAO888W - White Glass



CAO888 - Interior

COOK

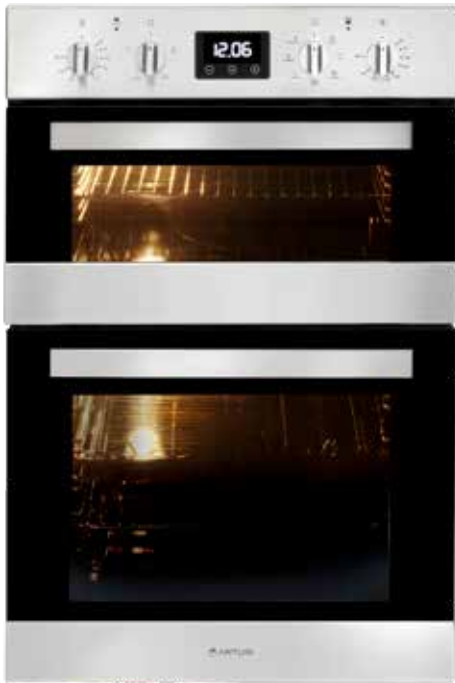

TOP OVEN



BOTTOM OVEN



BUILT-IN OVENS

AO888X MAXIMUS SERIES

double electric oven with digital timer & touch controls

- fingerprint-proof stainless steel
- top oven: cavity capacity- 36 litres gross
- lower oven: cavity capacity- 55 litres gross
- 4 + 4 functions
- digital timer with touch controls
- EVER-Clean enamel interior
- thermostat 0–250°C
- knob control
- triple-glazed glass doors
- flat, easy-clean inner glass door
- tangential fan ventilation
- 5 cooking levels (main oven)
- 2 cooking levels (top oven)

For technical diagrams please refer to 24-27
4.25kW/hr total electrical consumption
hard wired only

TOP OVEN




BOTTOM OVEN




COOK


TECHNICAL INFORMATION

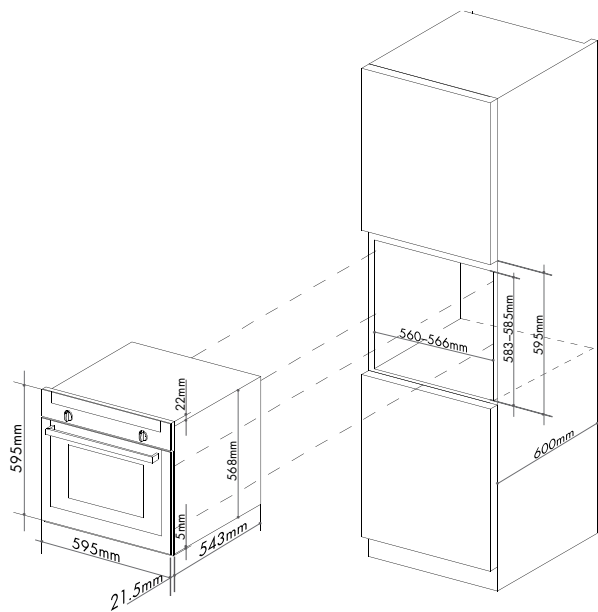


CAO600X

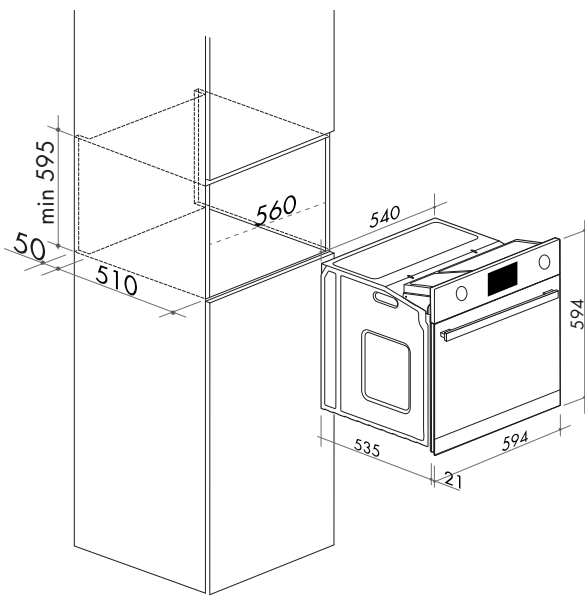


AO650X & AO651X

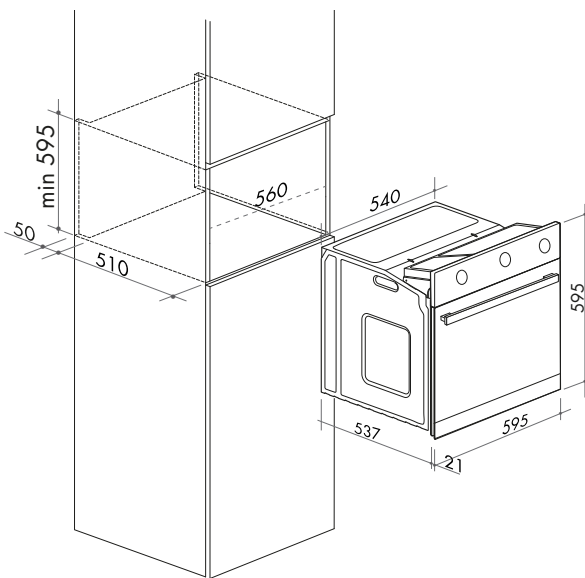


AO601

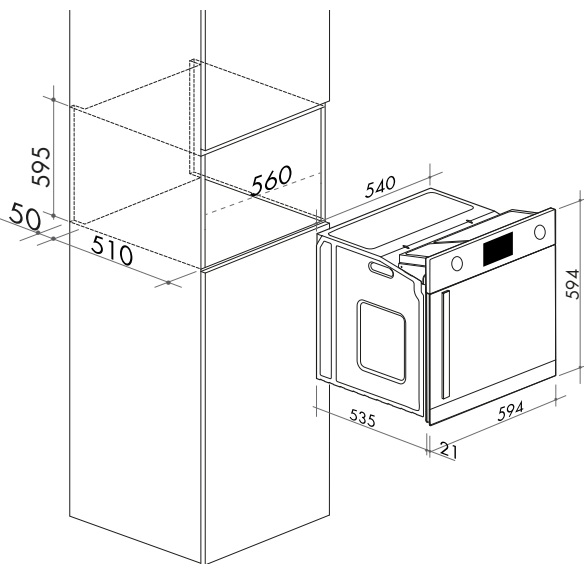


AOS652X

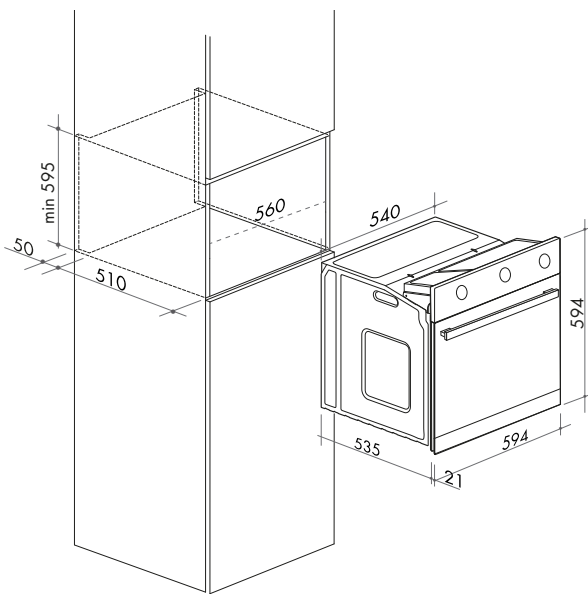


AO650GG

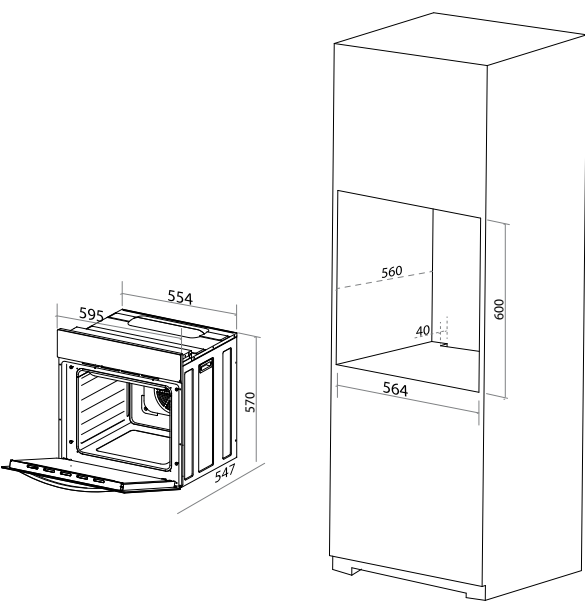

AO676

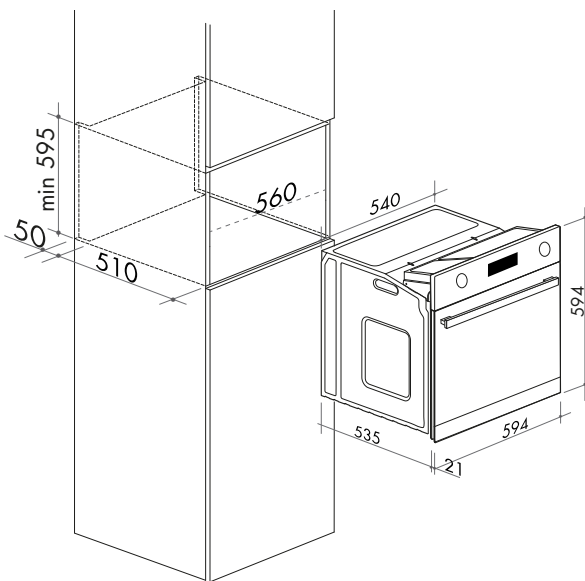

AO654XP

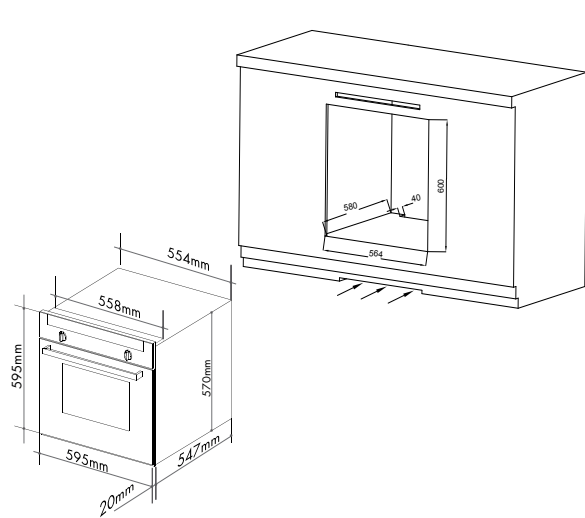


CAO610BP


PLEASE NOTE:
All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.

PLEASE NOTE:
All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.


TECHNICAL INFORMATION

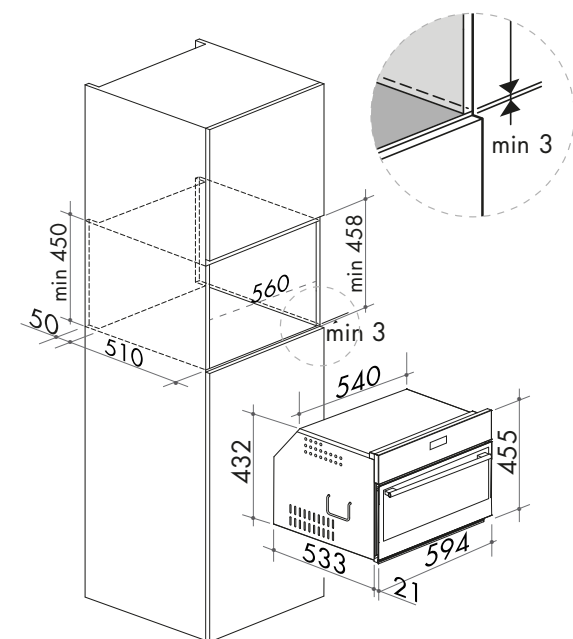


AO450X & ASC450X

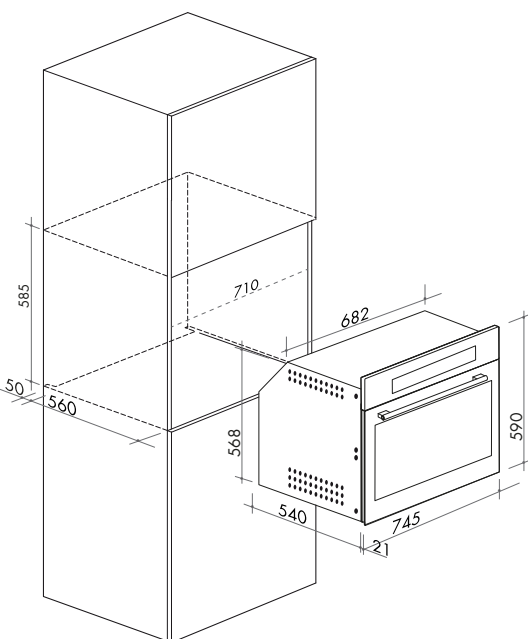


AO750X

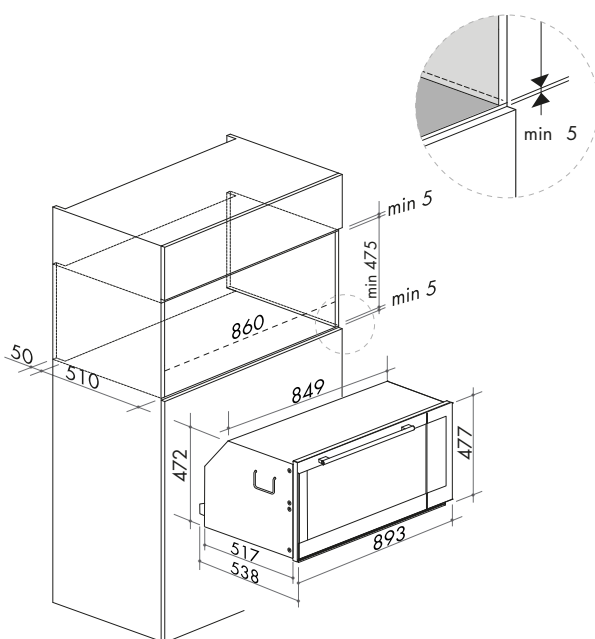


AO900X

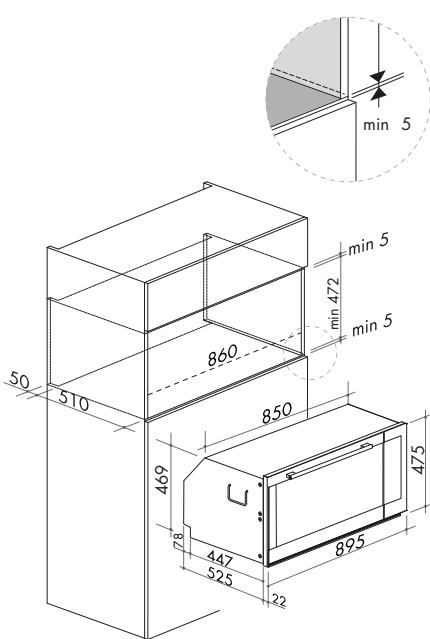


CAO900X1

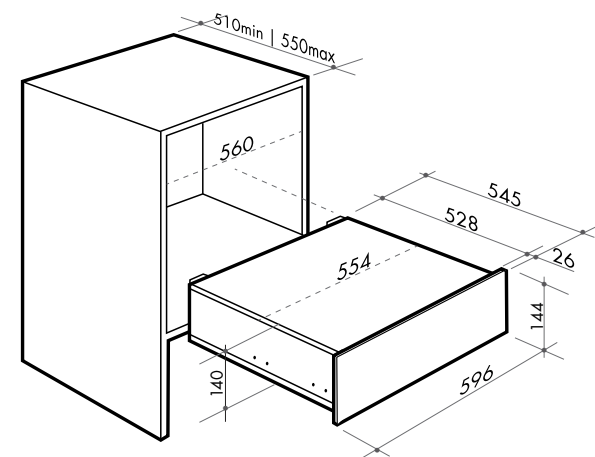


AWD15X

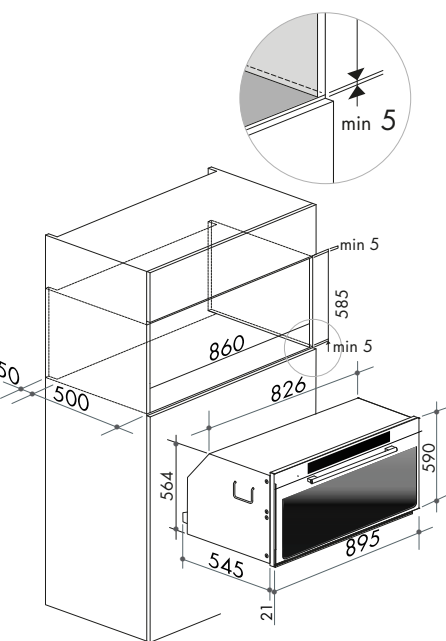

AO960X (For dimensions,
AO960B please check actual product)

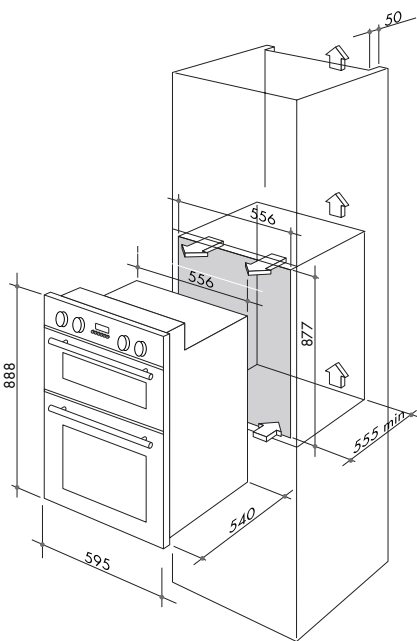


CAO888 SERIES

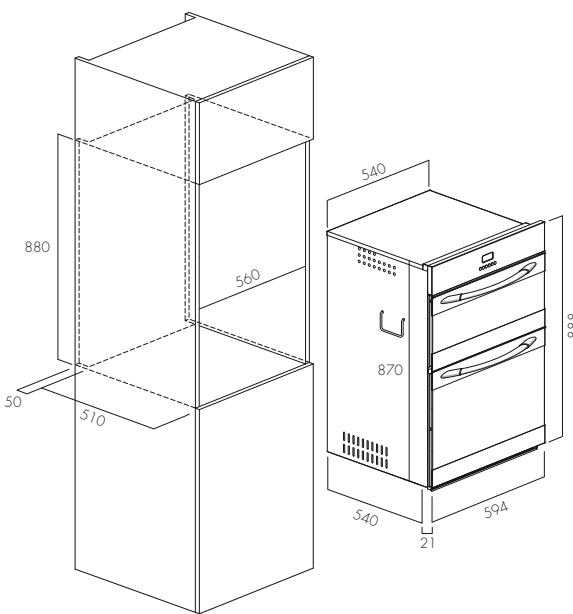


AO888X

PLEASE NOTE:
All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.


TECHNICAL INFORMATION

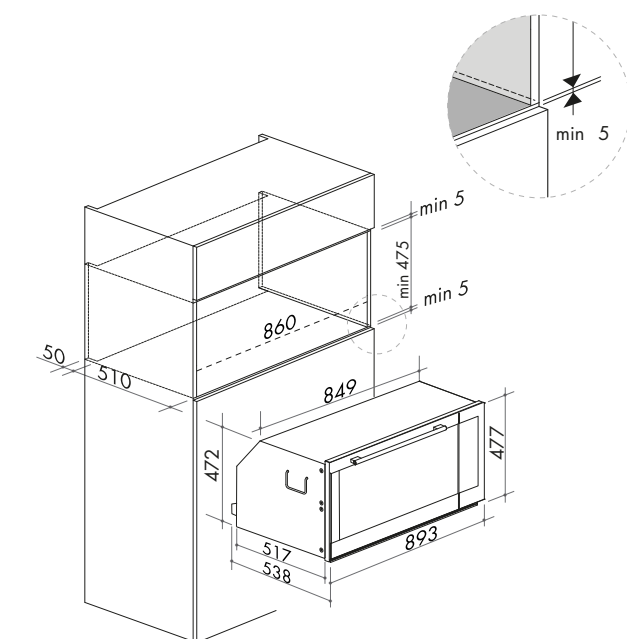


AO900X

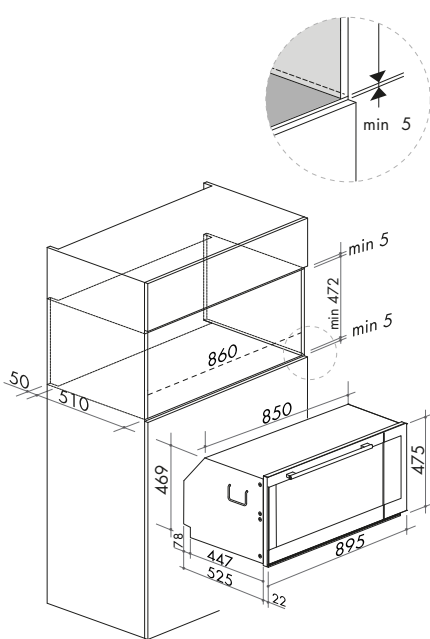

CAO900X1

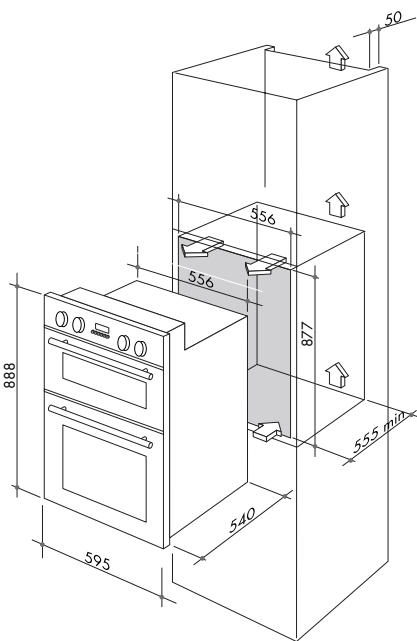

CAO888 SERIES

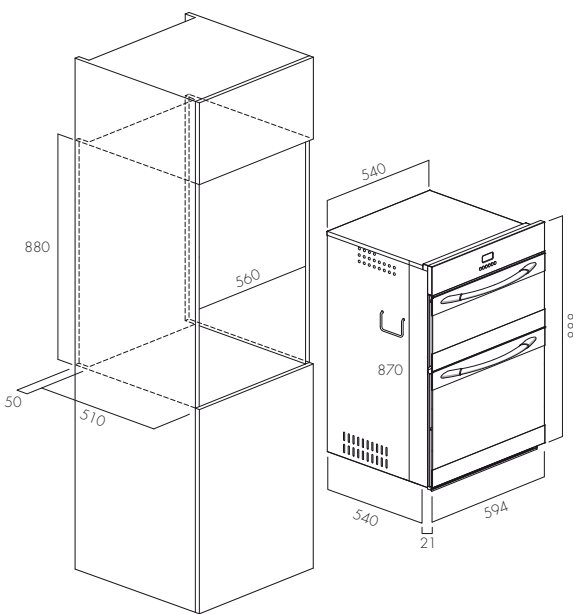

AO888X

PLEASE NOTE:
All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.

BUILT-IN COOKTOPS




BUILT-IN COOKTOPS

AGH30XFFD

domino gas cooktop

- stainless steel
- front: 1.0 kW/hr
- rear: 3.0 kW/hr
- top mount
- 2 gas burners — simmer and rapid
- black enamel trivets and burner caps
- flame failure device fitted to each burner
- automatic electronic ignition

i For technical diagrams please refer to page 42-45
3-pin plug and cord: 10 AMP GPO



COOK


BUILT-IN COOKTOPS

CACC30

domino ceramic cooktop

- black ceramic glass
- front: Ø165mm, 1200W
- rear: Ø200mm, 1800W
- 2 heat zones
- residual heat indicators
- easy-clean surface
- touch control
- child safety lock
- 9 heat levels per zone
- 99-minute timer
- automatic safety cut-off
- low profile

i For technical diagrams please refer to page 42-45
cord supplied, 3-pin plug required to be fitted
by an electrician (min.15 AMP GPO)
or cook top can be hard wired

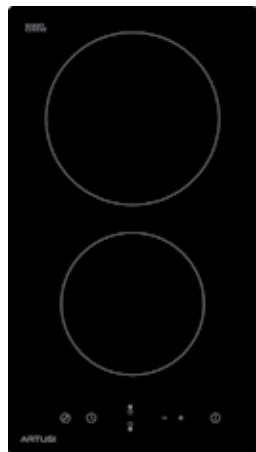

COOK

CACC32A

domino ceramic cooktop

- black ceramic glass
- front: Ø140mm, 1200W
- rear: Ø180mm, 1800W
- 2 heat zones
- residual heat indicators
- easy-clean surface
- touch control
- child safety lock
- 9 heat levels per zone
- 99-minute timer
- automatic safety cut-off
- low profile

i For technical diagrams please refer to page 42-45
cord supplied, 3-pin plug required to be fitted
by an electrician (min.15 AMP GPO)
or cook top can be hard wired



AID32A

domino induction cooktop

- black glass
- rear: Ø210mm, 2 kW
- front: Ø140mm, 1.5 kW
- 9 heat levels per zone
- sensor touch controls
- thermal overload protection
- hot surface indicator
- child lock
- automatic pan detection
- touch control
- 30cm wide

i For technical diagrams please refer to page 42-45
cord supplied, 3-pin plug required to be fitted
by an electrician (min.15 AMP GPO)
or cook top can be hard wired




BUILT-IN COOKTOPS

AGH65X

60cm gas cooktop with Flame Failure

- stainless steel
- front left wok: 3.5 kW/hr
- rear left auxiliary: 1.75 kW/hr
- front right semi-rapid: 1.0 kW/hr
- rear right semi-rapid: 1.75 kW/hr
- top mount
- 4 gas burners, including wok
- cast-iron trivets, wok cradle and burner caps
- automatic electronic ignition
- flame failure device fitted to each burner

i For technical diagrams please refer to page 42-45
3-pin plug and cord: 10 AMP GPO




CAGH60OCIX

60cm gas cooktop with Flame Failure

- stainless steel
- 4 gas burners, including wok:
- wok: 3.8 kW/hr
- 2 x semi-rapid: 1.75 kW/hr ea
- auxiliary: 1.0 kW/hr
- top mount
- cast-iron trivets and burner caps
- automatic electronic ignition
- flame failure device fitted to each burner

i For technical diagrams please refer to page 42-45
3-pin plug and cord: 10 AMP GPO



COOK



BUILT-IN COOKTOPS

CAGH60OX

60cm gas cooktop with Flame Failure

- stainless steel
- 4 gas burners, including wok:
- wok: 3.8 kW/hr
- 2 x semi-rapid: 1.75 kW/hr ea
- auxiliary: 1.0 kW/hr
- top mount
- cast-iron trivets
- automatic electronic ignition
- flame failure device fitted to each burner
- 3-pin plug and cord

i For technical diagrams please refer to page 42-45
3-pin plug and cord: 10 AMP GPO

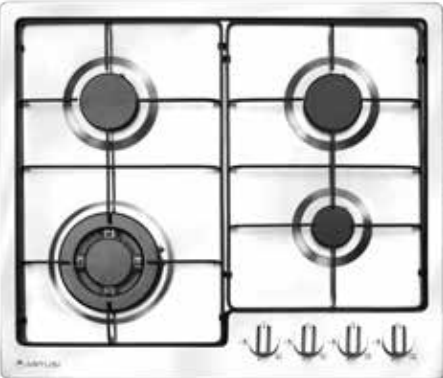


CAGH60OOB

60cm gas cooktop with Flame Failure

- top mount
- black schott glass
- 4 gas burners, including wok
- 2 sets of knobs supplied to suit all Artusi models
- cast-iron trivets and burner caps
- Flame Failure device fitted to each burner
- automatic electronic ignition
- 1x wok: 13 MJ/h
- 1x auxiliary: 4 MJ/h
- 2x semi-rapid: 6 MJ/hr ea
- LPG and natural jets supplied
- 10 AMP plug & lead supplied, GPO required

i For technical diagrams please refer to page 42-45
3-pin plug and cord: 10 AMP GPO




BUILT-IN COOKTOPS

AGH7OXFFD 72cm gas cooktop LEFT WOK with Flame Failure

- stainless steel
- left wok: 3.5 kW/hr
- 1x auxiliary: 1.0 kW/hr
- 2x semi-rapid: 1.75 kW/hr
- rapid: 3.1 kW/hr
- top mount
- 5 gas burners, including wok
- stainless steel
- cast-iron trivets, wok cradle and burner caps
- flame failure device fitted to each burner
- automatic electronic ignition


i For technical diagrams please refer to page 42-45
3-pin plug and cord: 10 AMP GPO



AGH71XFFD 72cm gas cooktop CENTRE WOK with Flame Failure

- stainless steel
- centre wok: 3.5 kW/hr
- 1x auxiliary: 1.0 kW/hr
- 2x semi-rapid: 1.75 kW/hr
- rapid: 3.1 kW/hr
- top mount
- 5 gas burners, including wok
- stainless steel
- cast-iron trivets, wok cradle and burner caps
- flame failure device fitted to each burner
- automatic electronic ignition

i For technical diagrams please refer to page 42-45
3-pin plug and cord: 10 AMP GPO





COOK

BUILT-IN COOKTOPS

CAGH75X 70cm gas cooktop with Flame Failure

- 1x wok: 3.8 kW/hr
- 1x auxiliary: 1.0 kW/hr
- 2x semi-rapid: 1.75 kW/hr
- rapid: 3.0 kW/hr
- top mount
- 5 gas burners, including centre wok
- stainless steel
- cast-iron trivets, wok cradle and burner caps
- Flame Failure device fitted to each burner
- cast-aluminium burners
- automatic electronic ignition
- compact cut out means it fits into same size hole as most 60cm cooktops


i For technical diagrams please refer to page 42-45
3-pin plug and cord: 10 AMP GPO

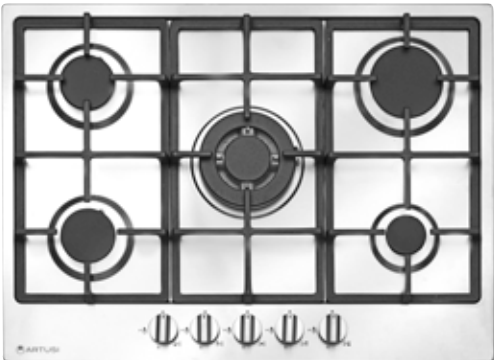

CAGH700OB 70cm gas cooktop with Flame Failure

- top mount
- black schott glass
- 5 gas burners, including wok
- 2 sets of knobs supplied to suit all Artusi models
- cast-iron trivets and burner caps
- Flame Failure device fitted to each burner
- automatic electronic ignition
- 1x wok: 3.6 kW/hr
- 1x auxiliary: 1.1 kW/hr
- 1x rapid: 2.7 kW/hr
- 2x semi-rapid: 1.6 kW/hr Ea
- LPG and natural jets supplied
- 10 AMP plug & lead supplied, GPO required

i For technical diagrams please refer to page 42-45
3-pin plug and cord: 10 AMP GPO



COOK

BUILT-IN COOKTOPS

AGH90XFFD

90cm gas cooktop with Flame Failure

- stainless steel
- 2 x wok: 3.5 kW/hr
- 1x auxiliary: 1.0 kW/hr
- 2x semi-rapid: 1.75 kW/hr
- rapid: 3.1 kW/hr
- top mount
- 6 gas burners, including 2 x wok burners
- stainless steel
- cast-iron trivets, wok cradle and burner caps
- flame failure device fitted to each burner
- automatic electronic ignition

i For technical diagrams please refer to page 42-45
3-pin plug and cord: 10 AMP GPO




AGH91XFFD

90cm gas cooktop with Flame Failure

- stainless steel
- 1 x wok: 3.5 kW/hr
- 1x auxiliary: 1.0 kW/hr
- 2x semi-rapid: 1.75 kW/hr
- rapid: 3.1 kW/hr
- top mount
- 5 gas burners, including wok burner
- stainless steel
- cast-iron trivets, wok cradle and burner caps
- flame failure device fitted to each burner
- automatic electronic ignition

i For technical diagrams please refer to page 42-45
3-pin plug and cord: 10 AMP GPO

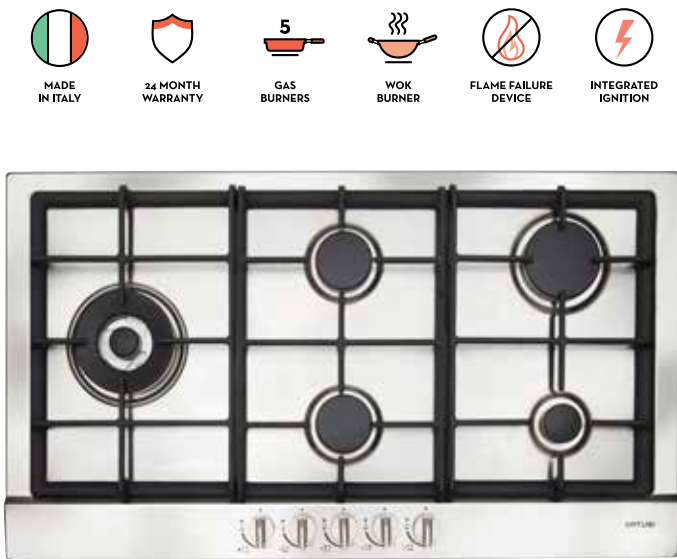

COOK


BUILT-IN COOKTOPS

CAGH9OETX

90cm gas cooktop with Flame Failure

- Top mount
- 5 gas burners including WOK burner
- stainless steel
- enamel trivets
- electric ignition
- flame failure device
- automatic electronic ignition
- 1 x wok: 3.8 kW/hr
- 2 x semi-rapid: 1.7 kW/hr
- 1 x auxiliary: 1.0 kW/hr
- 1 x rapid burner: 3.0 kW/hr

i For technical diagrams please refer to page 42-45
3-pin plug and cord: 10 AMP GPO

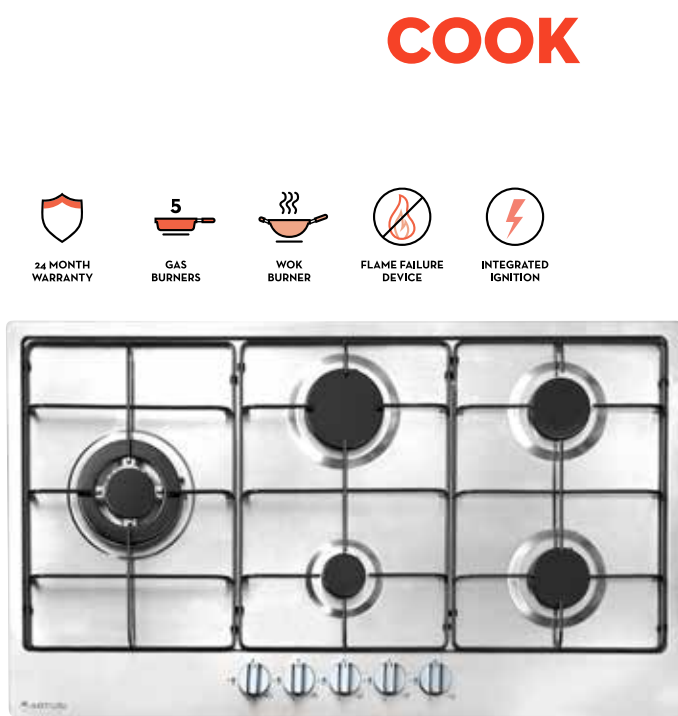


CAGH95X

90cm gas cooktop with Flame Failure

- stainless steel
- 1x wok: 3.6 kW/hr
- 1x auxiliary: 1.0 kW/hr
- 2x semi-rapid: 1.75 kW/hr
- rapid: 3.0 kW/hr
- top mount
- 5 gas burners, including wok
- stainless steel
- cast iron trivets, wok cradle and burner caps
- Italian made Sabaf burners
- automatic electronic ignition

i For technical diagrams please refer to page 42-45
3-pin plug and cord: 10 AMP GPO

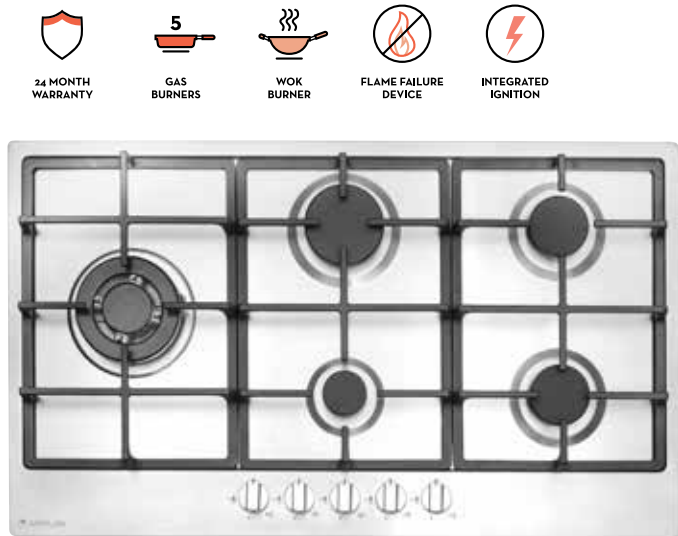

CAGH90O0B

90cm gas cooktop with Flame Failure

- top mount
- black schott glass
- 5 gas burners, including wok
- 2 sets of knobs supplied to suit all Artusi models
- cast-iron trivets and burner caps
- Flame Failure device fitted to each burner
- automatic electronic ignition
- 1x wok: 3.6 kW/hr
- 1x auxiliary: 1.1 kW/hr
- 1x rapid: 2.7 kW/hr
- 2x semi-rapid: 1.6 kW/hr ea
- LPG and natural jets supplied
- 10 AMP plug & lead supplied, GPO required

i For technical diagrams please refer to page 42-45
3-pin plug and cord: 10 AMP GPO




BUILT-IN COOKTOPS

CACC604

60cm knob control ceramic cooktops

- black ceramic glass
- front left: 1800W Ø200mm
- rear left: 1200W Ø165mm
- front right: 1200W Ø165mm
- rear right: 1000W Ø200mm
- 4 heat zones
- residual heat indicators
- easy-clean surface
- knob control
- child safety lock
- 9 heat levels per zone
- automatic safety cut off
- low profile

i For technical diagrams please refer to page 42-45
electrical connection 220–240V, hard wired
total power consumption: 5.5 kW/hr, hard wired

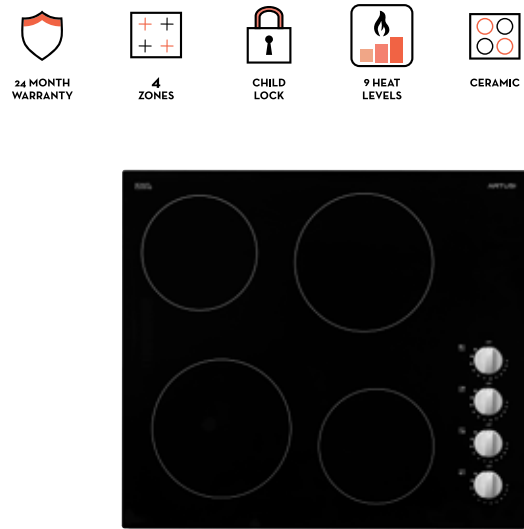


CACC60 & CACC70

60cm & 70cm touch control ceramic cooktops

- black ceramic glass
- front left: 1800W
- rear left: 1200W
- front right: 1200W
- rear right: 1800W
- 4 heat zones
- residual heat indicators
- easy-clean surface
- touch control
- child safety lock
- 9 heat levels per zone
- 99-minute timer
- automatic safety cut off
- low profile

i For technical diagrams please refer to page 42-45
electrical connection 220–240V, hard wired
total power consumption: 6.4 kW/hr, hard wired

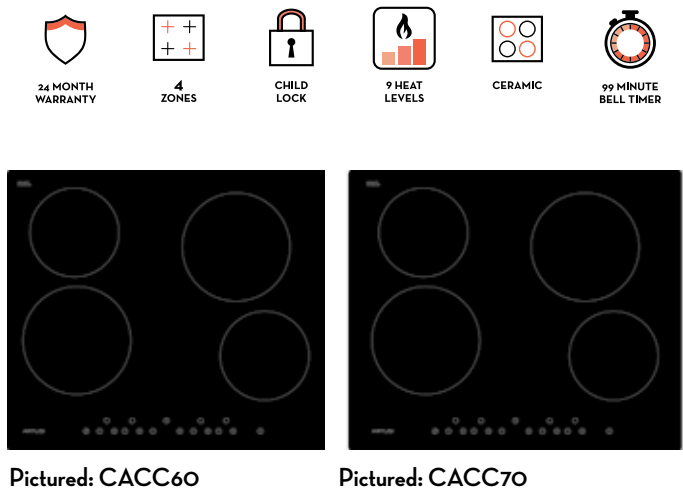

Pictured: CACC60

Pictured: CACC70

COOK


BUILT-IN COOKTOPS

CACC95

90cm touch control ceramic cooktop

- Black ceramic glass
- 5 heat zones
- Timer up to 99 minutes
- Child lock
- Touch control
- 9 heat sensors
- Residual heat display
- Front control panel
- Front left power zone: 1800W Ø180mm
- Rear left power zone: 1200W Ø145mm
- Rear right power zone: 1800W Ø180mm
- Front right power zone: 1200W Ø145mm
- Middle power zone: 700W/1700 Ø120mm/180mm

i For technical diagrams please refer to page 42-45
electrical connection 220–240V, hard wired
total power consumption: 7.2 kW/hr, hard wired

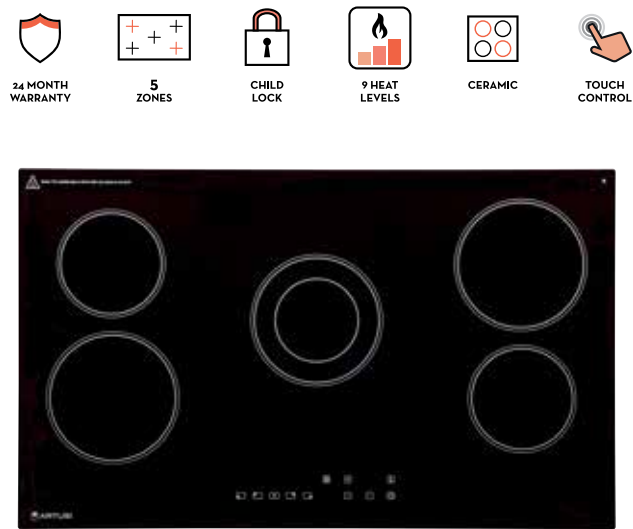

CACC90

90cm touch control ceramic cooktop

- black ceramic glass
- front left: 1800W
- rear left: 1200W
- middle: 1100W or 2000W
- front right: 1200W
- rear right: 1000W or 2200W
- 5 heat zones (including 2 x dual zone)
- residual heat indicators
- easy-clean surface
- sensor touch control
- child safety lock
- 9 heat levels per zone
- pan sensor
- 99-minute timer
- automatic safety cut off
- low profile

i For technical diagrams please refer to page 42-45
electrical connection 220–240V, hard wired
total power consumption: 7.2 kW/hr, hard wired



BUILT-IN COOKTOPS

CAID63X 60cm induction cooktop

- Touch control
- High quality ‘Schott’ glass
- Aluminium alloy thin 4mm trim
- 9-stage power setting
- Pan sensor
- Automatic safety switch off
- Residual heat indicators
- Indicator light colour: red
- Child lock
- BOOST feature
- Front left: 1200/1500 (Boost)
- Rear left: 2300/2600 (Boost)
- Right: 2300/3000 (Boost)

i For technical diagrams please refer to page 42-45
110mm lead supplied, double or single Phase
Total power(W): 6.5kW/h

CAID64X 60cm induction cooktop

- Sensor touch control
- High quality ‘Schott’ glass
- Aluminium Alloy thin 4mm trim
- 9-stage power setting
- Pan sensor
- Automatic safety switch off
- Residual heat indicators
- Child lock
- Indicator light colour: red
- BOOST feature
- Front Left - 1200/1500 (Boost)
- Rear left - 2300/2600 (Boost)
- Rear right - 1200/1500 (Boost)
- Front right - 2300/2600 (Boost)

i For technical diagrams please refer to page 42-45
110mm lead supplied, double or single Phase
Total power(W): 7kW/h

COOK




BUILT-IN COOKTOPS

CAID95X 90cm induction cooktop


- 2 Bridge functions
- Slider touch control
- High quality ‘Schott’ glass
- Aluminium alloy thin 4mm trim
- Individual Timer up to 99 minutes
- 9-stage power setting
- Pan sensor
- Automatic safety switch off
- Residual heat indicators
- Child lock
- Indicator light colour: red
- BOOST feature
- Front Left - 1800/2300 (Boost)
- Rear left - 1800/2300 (Boost)
- Centre - 2200/3000 (Boost)
- Rear right - 1800/2300 (Boost)
- Front right - 1800/2300 (Boost)

i For technical diagrams please refer to page 42-45
110mm lead supplied, double or single Phase
Total power(W): 9.4kW/h


COOK




TECHNICAL INFORMATION

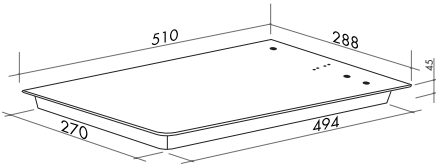


AGH3OXFFD

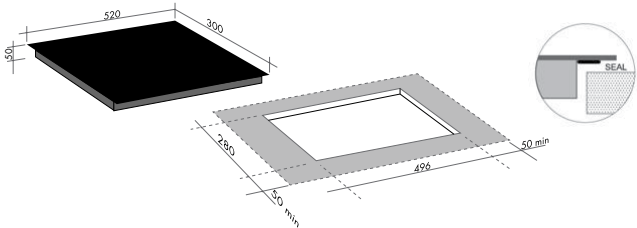


CACC32 & CACC30

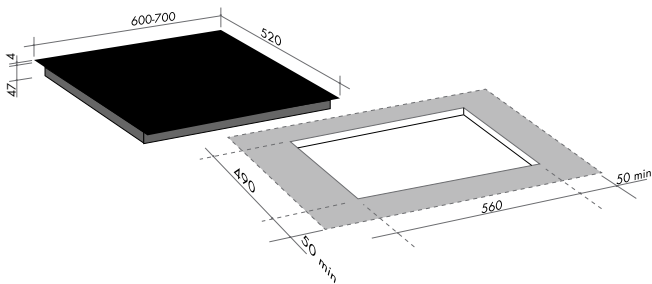


CACC604

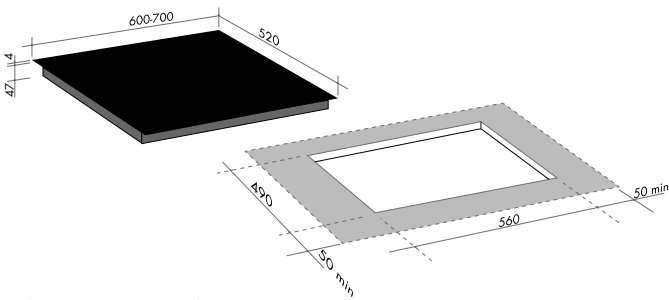


CACC60 & CACC70

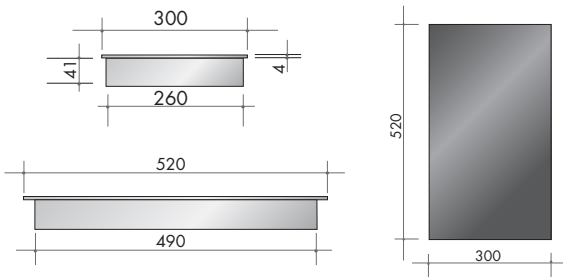


AID32

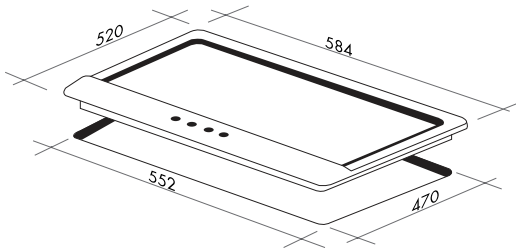


CAGH6OOOB

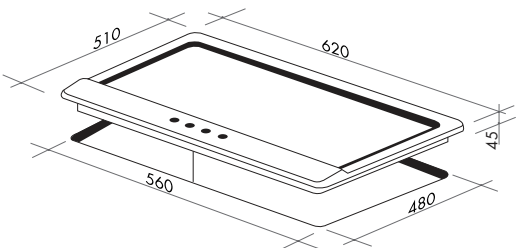

AGH65X

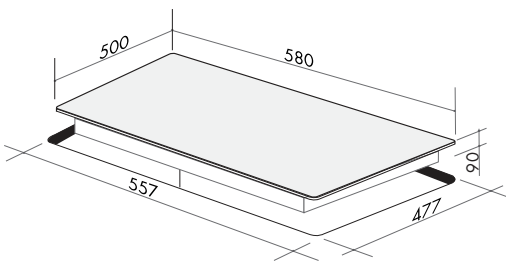

CAGH6OOCIX & CAG6OOX

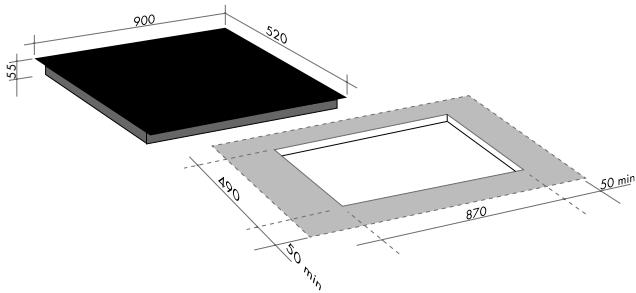


CACC90 & CACC95


PLEASE NOTE:
 All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.

PLEASE NOTE:
 All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.


TECHNICAL INFORMATION

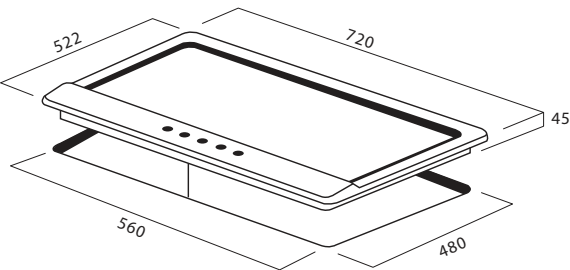


AGH70XFFD & AGH71XFFD

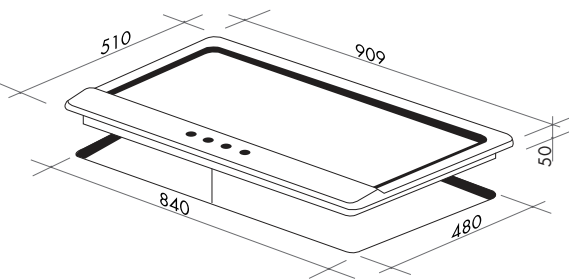

AGH90XFFD & AGH91XFFD

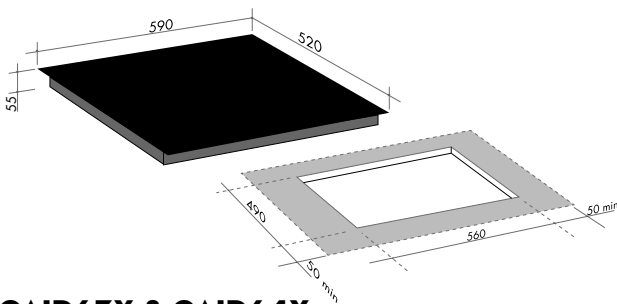


CAID63X & CAID64X

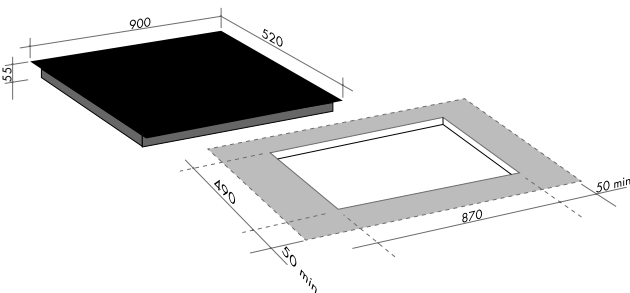


CAID95X

PLEASE NOTE:
All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.


TECHNICAL INFORMATION

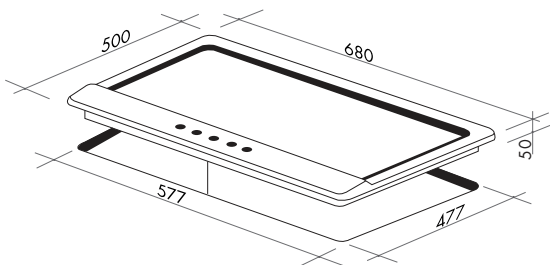


CAGH75X

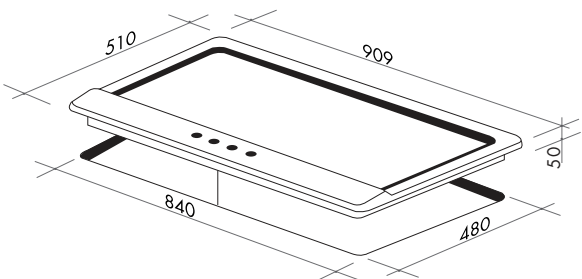

CAGH95X & CAGH9OETX

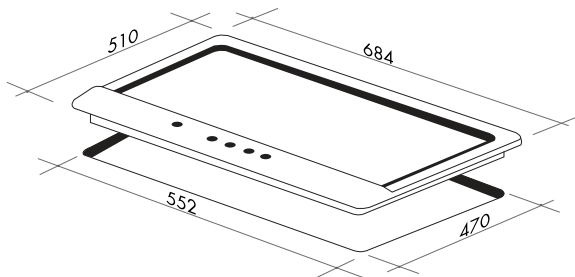

CAGH70O0B

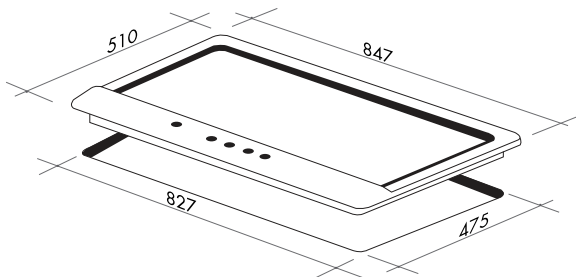

CAGH90O0B

PLEASE NOTE:
All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.

FREESTANDING COOKERS



FREESTANDING COOKERS

COOK

AFG999 SERIES

90cm vintage style cookers - Available in Stainless Steel, Brilliant White & Matt Black



AFG999X



AFG999W



AFG999B

FREESTANDING COOKERS

COOK

AFG999 SERIES

90cm 'Pellegrino' vintage style cooker

OVEN

- Cavity capacity- 106 litres gross
- 8 functions- light, defrost with fan, convection, grill, half grill, fan grill, lower convection bake
- temperature range 60-250°C
- easy clean enamel
- Vintage style programmer clock
- storage drawer compartment
- triple glazed glass door
- oven cavity light
- 5 cooking levels

HOB

- Stainless steel surface
- Sabaf burner construction
- 6 burners:

- 1x Auxiliary	1.1 kw
- 3x Semi-rapid	1.97 kw
- 1x Rapid	3.05 kw
- Triple crown Wok burner	3.5 kw
- Supplied in natural gas jets with LPG jets available for conversion


OVERALL FEATURES

- Available colours: Matt Black, Brilliant White & Stainless Steel
- Supplied with adjustable feet
- Optional Accessories- Set of royal feet 110-160mm (max adjustment 15mm)
- Knob control

i For technical diagrams please refer to page 62-65
total power consumption: 2.8 kW/h
electric cable: 15 AMP plug & lead supplied
total gas consumption: 47.46 mj/h (natural gas)



Optional Accessory - Set of royal feet
Code: ARL

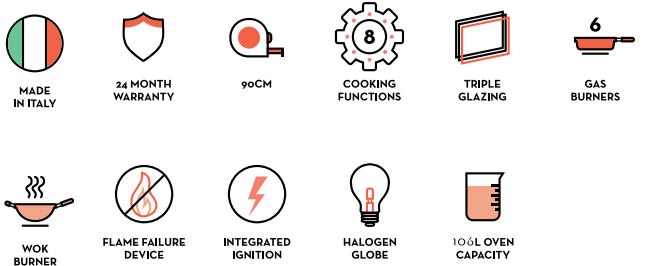

FREESTANDING COOKERS

AFG915 SERIES

90cm freestanding cooker - Available in Stainless Steel & Matt Black



AFG915X



AFG915B

COOK

FREESTANDING COOKERS

AFG915 SERIES

90cm freestanding cooker

OVEN

- Cavity capacity- 106 litres gross
- 8 functions- light, defrost with fan, convection, grill, half grill, fan grill, lower convection bake
- temperature range 60-250°C
- easy clean enamel
- Vintage style programmer clock
- storage drawer compartment
- triple glazed glass door
- oven cavity light
- 5 cooking levels

HOB

- Stainless steel surface
- Sabaf burner construction
- 5 burners:
 - 1x Auxiliary 1.1 kw
 - 2x Semi-rapid 1.97 kw
 - 1x Rapid 3.05 kw
 - Triple crown Wok burner 3.5 kw
- Supplied in natural gas jets with LPG jets available for conversion

OVERALL FEATURES


- Available colours: Matt Black & Stainless Steel
- Supplied with adjustable feet
- detachable kick plate for feet also supplied
- Knob control

i For technical diagrams please refer to page 62-65
total power consumption: 2.8 kW/h
electric cable: 15 AMP plug & lead supplied
total gas consumption: 40.57 mj/h (natural gas)



Supplied with a matching kick panel
AFG915BKP or AFG915XKP

COOK

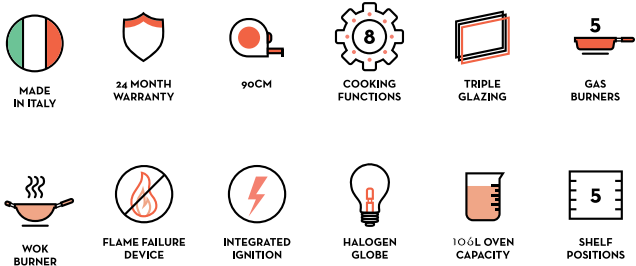

FREESTANDING COOKERS

AFG913 SERIES

90cm freestanding cooker

OVEN

- 9 function 3D oven including fan forced & electric grill
- Cavity capacity- 110 litres gross
- triple-glazed glass door
- easy-to-clean flat glass inner door
- removable oven door
- 4 cooking levels
- 2 x oven cavity lights
- digital timer & clock
- cavity cooling fan
- deep baking tray + 1 wire oven rack

HOB

- cast-iron trivets and burner caps
- cast-iron wok cradle
- automatic electronic ignition
- centre WOK placement
- single-piece pressed hob for easy cleaning
- deep pressed hob
- flame failure safety device

OVERALL FEATURES

- Available colour: Stainless Steel
- Supplied with adjustable feet
- Knob control
- Drop-down storage compartment

For technical diagrams please refer to page 62-65
total power consumption: 2.8 kW/h
electric cable: lead supplied
total gas consumption: 40.57 mj/h (natural gas)

**Correct at time of printing



COOK

FREESTANDING COOKERS

CAFG9 SERIES

- CAFG90X - 90cm freestanding cooker electric oven, 5-gas burner hob
- CAFG91 X & B - 90cm freestanding cooker electric oven with clock, 5-gas burner hob

OVEN

- 9 functions — top and bottom element, defrost, fan assisted, fan forced, fan grill, grill, rotisserie, base heat
- double cavity cooking fan
- 50–250°C thermostat
- digital clock (CAFG91 ONLY)
- triple-glazed glass door
- electric grill + rotisserie
- oven light
- removable oven cavity floor
- 4 cooking levels
- baking tray + 2 wire oven racks
- warming compartment


HOB

- 1 triple ring 3.6 kW/hr
- 1 rapid burner 3.0 kW/hr
- 2 semi-rapid 1.75 kW/hr
- 1 auxiliary 1.0 kW/hr
- cast-iron trivets and burner caps
- flame failure device fitted to each burner
- automatic ignition
- single-piece pressed hob

OVERALL FEATURES

- CAFG90X Available colours: Stainless Steel
- CAFG91 Available colours: Gloss Black & Stainless Steel
- Supplied with adjustable feet
- Knob control
- Colour matched door handles

For technical diagrams please refer to page 62-65
total power consumption: 2.94 kW/h
electric cable: 15 AMP hard wired
total gas consumption: 38.85 mj/h (natural gas)

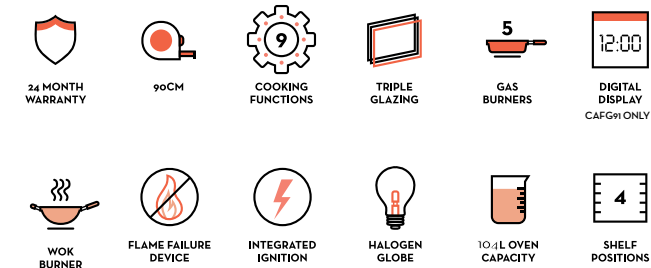


CAFG90X



CAFG91X



CAFG91B

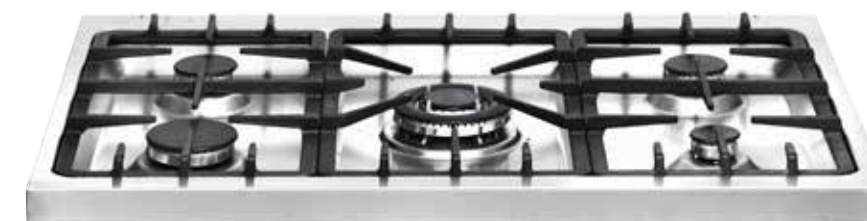

COOK

FREESTANDING COOKERS

AFGR935B SERIES

90cm freestanding three door cooker

GRILL

- electric static grill
- cavity capacity- 31 litres USE-ABLE
- 3 shelf positions

SECONDARY OVEN (TALL CAVITY)

- fan + rear heating element + light for cleaning
- cavity capacity- 65 litres USE-ABLE
- deep baking tray & grill insert
- 10 shelf positions

MAIN OVEN

- 6 multi-function cooking modes + light for cleaning
- cavity capacity- 65 litres USE-ABLE
- easy-to-clean inner door
- 2 x oven cavity lights
- cavity cooling fan
- deep baking tray & grill insert + 1 wire oven rack
- 4 shelf positions

OVERALL FEATURES

- 3 Door Electric Oven with Gas Hob
- available colour: matt black
- easy clean enamel interior
- multiple cooking levels
- knob control
- analogue timer & clock
- decorative black splash back


HOB

- cast-iron trivets, burner caps & WOK cradle
- black cooking surface
- automatic electronic ignition
- 3.6kw/h centre WOK placement
- single-piece pressed hob for easy cleaning
- deep pressed hob
- flame failure safety device

i For technical diagrams please refer to page 62-65
total power consumption: 2.8 kW/h
electric cable: lead supplied
total gas consumption: 40.57 mj/h (natural gas)

**Correct at time of printing

COOK

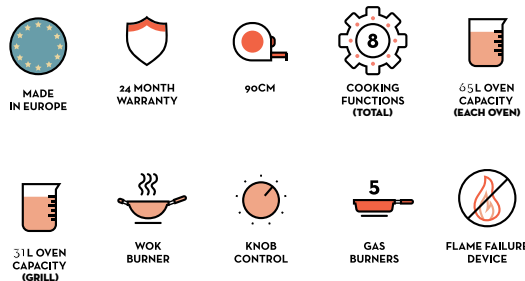

FREESTANDING COOKERS

CAFC9 SERIES

- CAFC95X - 90cm freestanding cooker electric oven, 5-zone ceramic hob

OVEN

- 9 functions — top and bottom element, defrost, fan assisted, fan forced, fan grill, grill, rotisserie, base heat
- double cavity cooking fan
- 50–250°C thermostat
- digital clock
- triple-glazed glass door
- electric grill + rotisserie
- grill heat power 2.0 kW
- oven light
- removable oven cavity floor
- 4 cooking levels
- baking tray + 2 wire oven racks
- warming compartment


HOB

- 5 zones + 2 extension zones
- 1 Large dual zone 1.0 / 2.2 kW/hr
- 1 Small zone 1.2 kW/hr
- 2 Medium zones 1.8 kW/hr
- 1 Oval dual zone 1.1 / 2.0 kW/hr
- 11 heat settings
- Ceran glass surface
- easy-clean hob
- residual heat indicator
- Recessed cooking surface with stainless steel trim

OVERALL FEATURES

- CAFC95X Available colour: Stainless Steel
- Supplied with adjustable feet
- Knob control
- Colour matched door handles

i For technical diagrams please refer to page 62-65
total power consumption: 11.94 kW/h
electric cable: hard wired

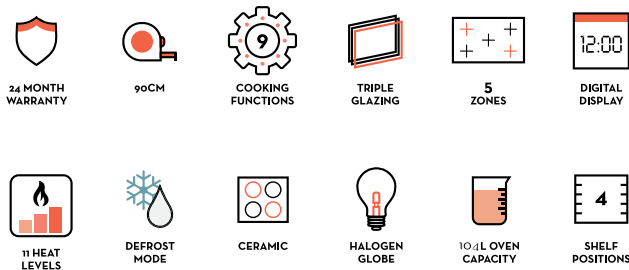

COOK

FREESTANDING COOKERS

AFE544W

54cm freestanding cooker electric oven, 4 heat plates

OVEN

- 4 functions — light, bottom element, top and bottom element, grill + light
- thermostat 50–250°C
- removable door
- adjustable feet
- standard inclusions: baking tray, 2 x grill rack, chrome side rack supports, heat-resistant tray handles
- Storage compartment

HOB

- four EGO plate cooking locations
- 2 x 145mm diameter, 1.0kW
- 1 x 180mm diameter, 1.5kW
- 1 x 180mm diameter, 2.0kW
- single-piece pressed hob

OVERALL FEATURES

- Available colours: Brilliant White
- Knob control

i For technical diagrams please refer to page 62-65
total power consumption: 7.5 kW/h
electric cable: 15 AMP hard wired

AFE547W

54cm freestanding cooker electric oven, 4 heat plates

OVEN

- 7 cooking functions — Classic (lower+upper+light), grill, base heat, half fan grill, fan forced, fan assisted, defrost
- thermostat 50–250°C
- removable door
- adjustable feet
- standard inclusions: baking tray, 2 x grill rack, chrome side rack supports, heat-resistant tray handles
- Storage compartment

HOB

- four EGO plate cooking locations
- 2 x 145mm diameter, 1.0kW
- 1 x 180mm diameter, 1.5kW
- 1 x 180mm diameter, 2.0kW
- single-piece pressed hob

OVERALL FEATURES

- Available colours: Brilliant White
- Knob control

i For technical diagrams please refer to page 62-65
total power consumption: 7.5 kW/h
electric cable: 15 AMP hard wired

COOK



FREESTANDING COOKERS

AFDE547OW

54cm freestanding cooker electric oven & grill, 4 heat plates

OVEN & ELECTRIC GRILL

- 7 cooking functions — Classic (lower+upper+light), grill, base heat, half fan grill, fan forced, fan assisted, defrost
- oven thermostat 50–250°C
- removable door
- adjustable feet
- standard inclusions: baking tray, 2 x grill rack, chrome side rack supports, heat-resistant tray handles
- Storage compartment

HOB

- four EGO plate cooking locations
- 2 x 145mm diameter, 1.0kW
- 1 x 180mm diameter, 1.5kW
- 1 x 180mm diameter, 2.0kW
- single-piece pressed hob

OVERALL FEATURES

- Available colours: Brilliant White
- Knob control

i For technical diagrams please refer to page 62-65
total power consumption: 12 kW/h (Grill: 2 kw/h)
electric cable: 15 AMP hard wired

AFE607W

60cm freestanding cooker electric oven, 4 heat plates

OVEN

- 7 cooking functions — Classic (lower+upper+light), grill, base heat, half fan grill, fan forced, fan assisted, defrost
- thermostat 50–250°C
- removable door
- adjustable feet
- standard inclusions: baking tray, 2 x grill rack, chrome side rack supports, heat-resistant tray handles
- Storage compartment

HOB


- four EGO plate cooking locations
- 2 x 145mm diameter, 1.0kW
- 1 x 180mm diameter, 1.5kW
- 1 x 180mm diameter, 2.0kW
- single-piece pressed hob

OVERALL FEATURES

- Available colours: Brilliant White
- Knob control

i For technical diagrams please refer to page 62-65
total power consumption: 7.5 kW/h
electric cable: 15 AMP hard wired

COOK



FREESTANDING COOKERS

AFC547W

54cm freestanding cooker electric oven, 4 cooking zones

OVEN

- 7 functions — upper+lower heat (conventional cooking), electric grill, base heat, fan grill, fan assisted, fan+base heat, fan + light
- thermostat 50–250°C with oven heat indicator
- 5 shelf heights
- removable triple glazed glass door
- adjustable feet
- standard inclusions: baking tray, 2x chrome-wire shelves, heat-resistant tray handle set
- storage drawer

HOB

- four ceramic zone cooking locations
- 2 x 145mm diameter, 1.2 kW each
- 2 x 180mm diameter, 1.8kW
- single-piece pressed hob

OVERALL FEATURES

- Available colours: Brilliant White
- Knob control

i For technical diagrams please refer to page 62-65
total power consumption: 7.5 kW/h
electric cable: 15 AMP hard wired

AFDC547OW

54cm freestanding cooker electric oven, electric grill

OVEN & ELECTRIC GRILL

- 7 functions — upper+lower heat (conventional cooking), electric grill, base heat, fan grill, fan assisted, fan+base heat, fan + light
- oven heat indicator
- 5 shelf heights (oven)
- 2 shelf heights (grill)
- thermostat 50–250°C
- removable triple glazed glass door
- adjustable feet
- standard inclusions: baking tray, 2x chrome-wire shelves, chrome side rack supports, heat-resistant tray handles

HOB



- four ceramic zone cooking locations
- 2 x 145mm diameter, 1.2 kW each
- 2 x 180mm diameter, 1.8kW
- single-piece pressed hob

OVERALL FEATURES

- Available colours: Brilliant White
- Knob control

i For technical diagrams please refer to page 62-65
total power consumption: 12 kW/h (Grill: 2 kw/h)
electric cable: 15 AMP hard wired

COOK

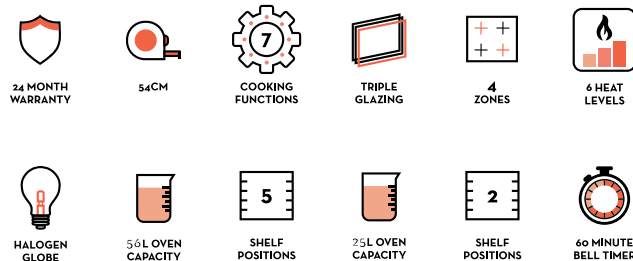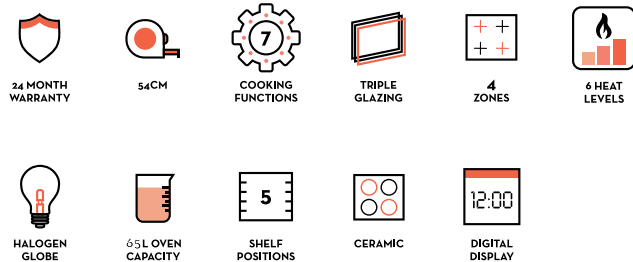

FREESTANDING COOKERS

AFC607 W & X

60cm freestanding cooker electric oven, 4 cooking zones

OVEN

- 7 functions — upper+lower heat (conventional cooking), electric grill, base heat, fan grill, fan assisted, fan+base heat, fan + light
- oven heat indicator
- 5 shelf heights (oven) | 2 shelf heights (grill)
- thermostat 50–250°C
- removable triple glazed glass door
- adjustable feet
- standard inclusions: baking tray, 2x chrome-wire shelves, chrome side rack supports, heat-resistant tray handles
- storage drawer


HOB

- four ceramic zone cooking locations
- 2 x 145mm diameter, 1.2 kW each
- 2 x 180mm diameter, 1.8kW
- single-piece pressed hob

OVERALL FEATURES

- Available colours: Brilliant White
- Knob control

i For technical diagrams please refer to page 62-65
total power consumption: 8 kW/h
electric cable: 15 AMP hard wired

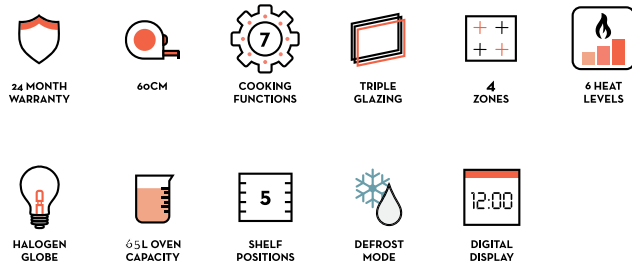

AFC607X



AFC607W



FREESTANDING COOKERS

AFGE5470 W & X

54cm freestanding cooker electric oven, 4 gas burners

OVEN

- 7 cooking functions — Classic (lower+upper+light), grill, base heat, half fan grill, fan forced, fan assisted, defrost
- thermostat 50–250°C
- removable door, triple glazed
- adjustable feet
- standard inclusions: baking tray, 2 x grill rack, chrome side rack supports, heat-resistant tray handles
- storage drawer

HOB

- four gas burners
- 2 x semi-rapid, 1.75 kW each
- 1 x auxiliary, 1.0 kW
- 1 x wok, 3.5 kW

OVERALL FEATURES

- Available colours: Brilliant White
- Knob control

i For technical diagrams please refer to page 62-65
total power consumption: 3.7 kW/h
total gas consumption 9.25 kW
electric cable: 15 AMP hard wired

AFGE6070W

60cm freestanding cooker electric oven, 4 gas burners

OVEN

- 7 cooking functions — Classic (lower+upper+light), grill, base heat, half fan grill, fan forced, fan assisted, defrost
- thermostat 50–250°C
- removable triple glazed glass door
- adjustable feet
- storage drawer
- standard inclusions: baking tray, 2 x wire shelves, chrome side rack supports, heat-resistant tongs

HOB

- four gas burners
- 2 x semi-rapid, 1.75 kW each
- 1 x auxiliary, 1.0 kW
- 1 x wok, 3.5 kW

OVERALL FEATURES

- Available colours: Brilliant White
- Knob control

i For technical diagrams please refer to page 62-65
total power consumption: 3.7 kW/h
total gas consumption 9.25 kW
electric cable: 15 AMP hard wired

COOK



FREESTANDING COOKERS

AFGG54EGW

60cm freestanding cooker gas oven, 4 gas burners

GAS OVEN & SEPARATE ELECTRIC GRILL

- 4 cooking functions
- oven temperature range 150–265°C (8 temperature options)
- removable triple glazed glass door
- adjustable feet
- standard inclusions: baking tray, 2 x wire shelves, chrome side rack supports, heat-resistant tongs

HOB

- 1 WOK burner 3.5 kW/hr, 2 semi-rapid 1.75 kW/hr, 1 auxiliary 1.0 kW/hr
- enamel trivets and burner caps
- flame failure device fitted to each burner
- automatic ignition
- single-piece 4 gas burner pressed hob

OVERALL FEATURES

- Available colour: Brilliant White
- Knob control

i For technical diagrams please refer to page 62-65
Power Consumption: 2.0 kW/h
Gas Consumption: 39.6 mj/h (natural gas)
Electrical Connection: 10 AMP 1.5m plug and lead supplied

AFGG54W

60cm freestanding cooker gas oven, 4 gas burners

GAS OVEN & ELECTRIC GRILL

- 4 cooking functions
- thermostat 50–250°C
- removable triple glazed glass door
- adjustable feet
- storage drawer
- standard inclusions: baking tray, 2 x wire shelves, chrome side rack supports, heat-resistant tongs

HOB

- 1 WOK burner 3.5 kW/hr, 2 semi-rapid 1.75 kW/hr, 1 auxiliary 1.0 kW/hr
- enamel trivets and burner caps
- flame failure device fitted to each burner
- automatic ignition
- single-piece 4 gas burner pressed hob

OVERALL FEATURES


- Available colours: Brilliant White
- Knob control

i For technical diagrams please refer to page 62-65
Power Consumption: 2.0 kW/h
Gas Consumption: 39.6 mj/h (natural gas)
Electrical Connection: 10 AMP 1.5m plug and lead supplied


COOK




TECHNICAL INFORMATION

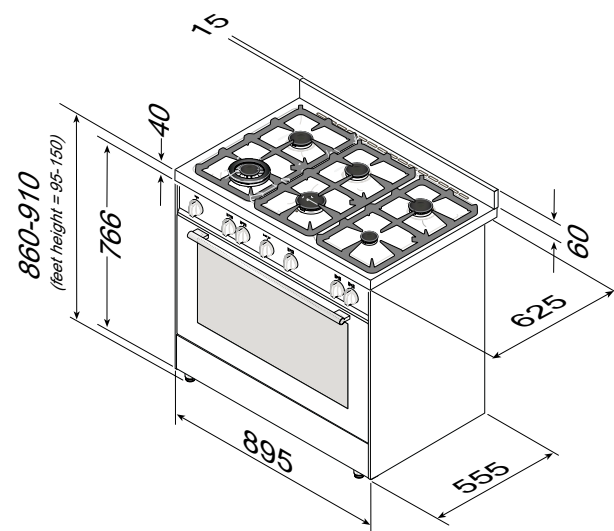


AFG999 SERIES

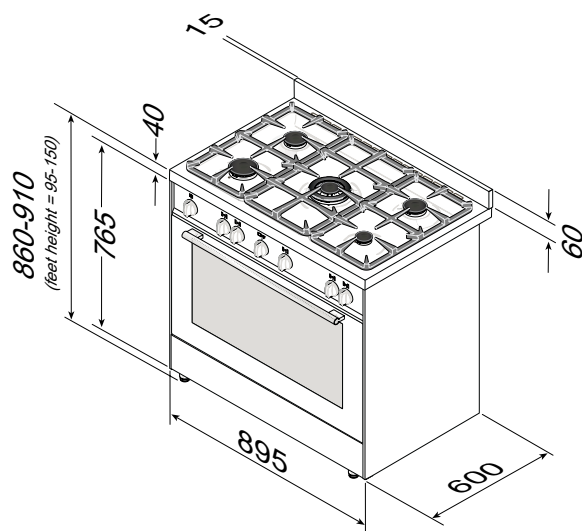

AFG915 SERIES

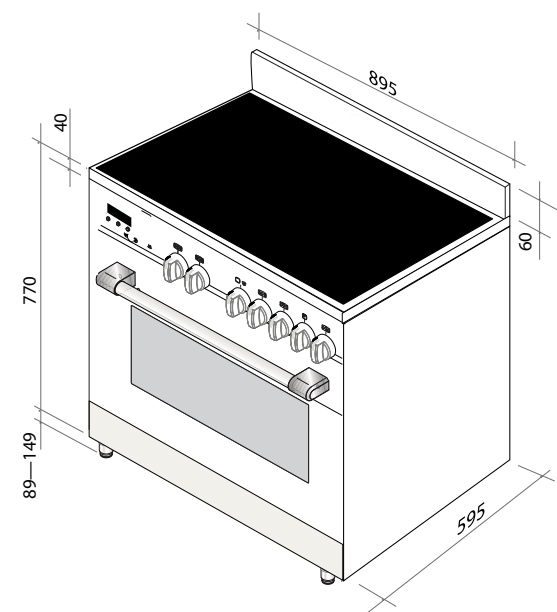


CAFG9, CAFC9 & CAFI9 SERIES

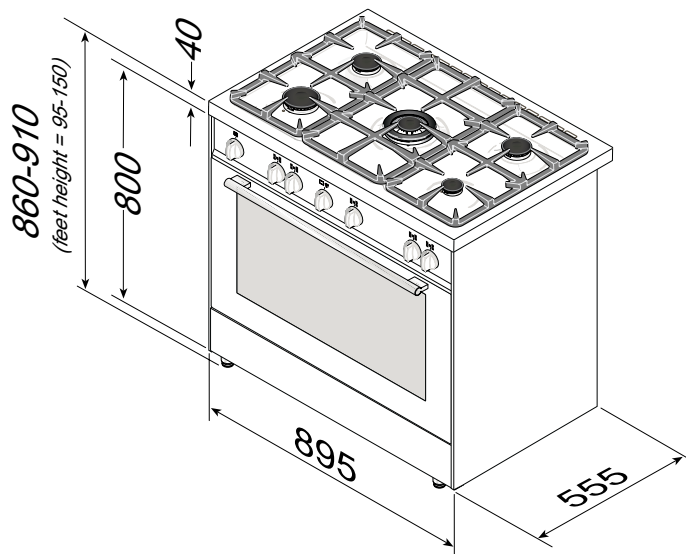



AFG913

PLEASE NOTE:
All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.



TECHNICAL INFORMATION

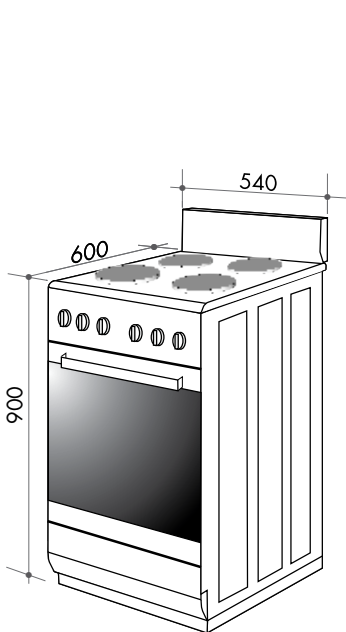



AFE544W

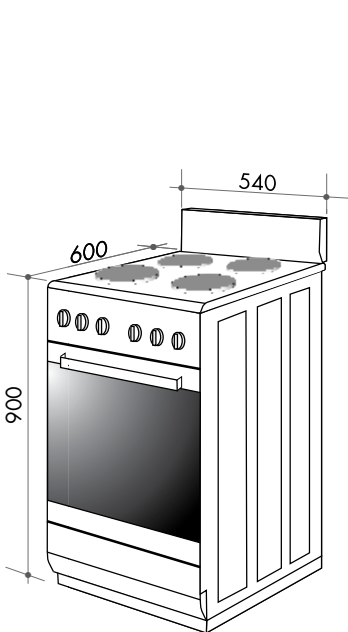


AFE547W & AFDE547OW

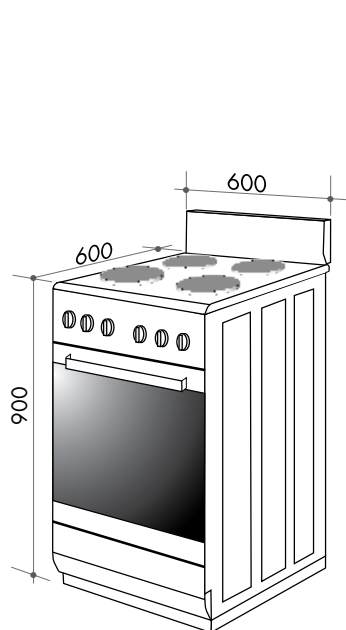

AFE607W

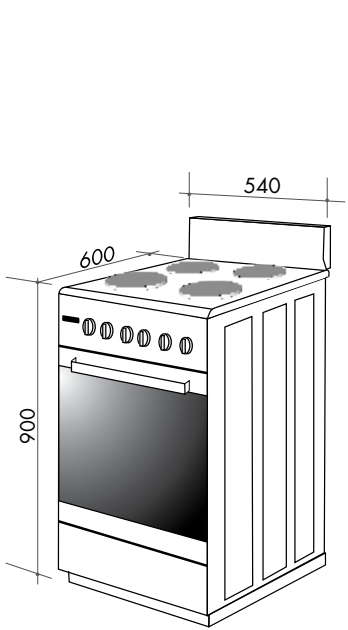


AFC547W




PLEASE NOTE:
All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.

TECHNICAL INFORMATION

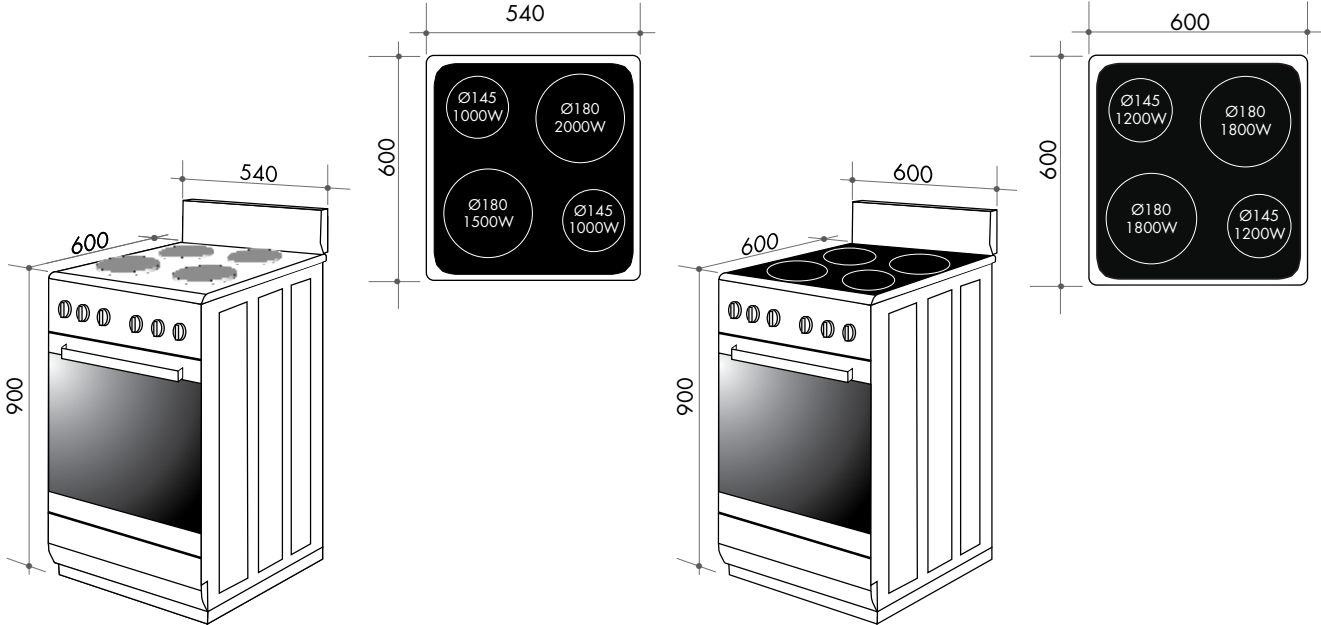

AFDC547OW

AFC607

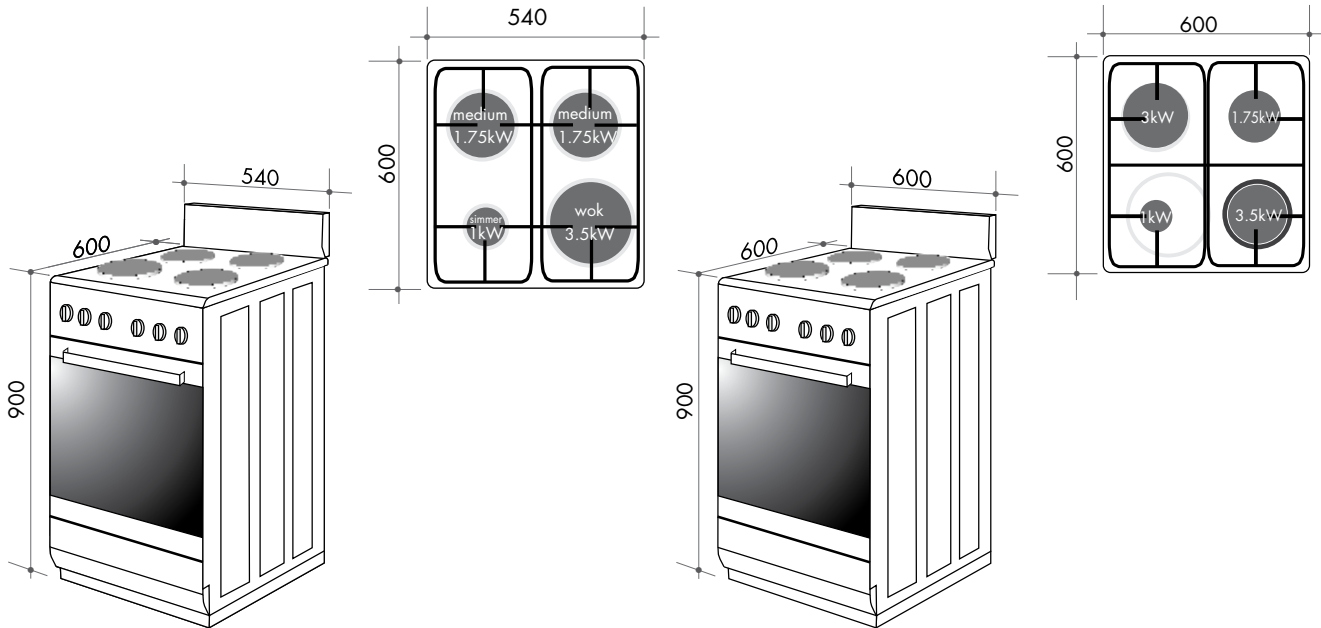


AFGE547O

AFGE607OW


PLEASE NOTE:
 All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.

TECHNICAL INFORMATION

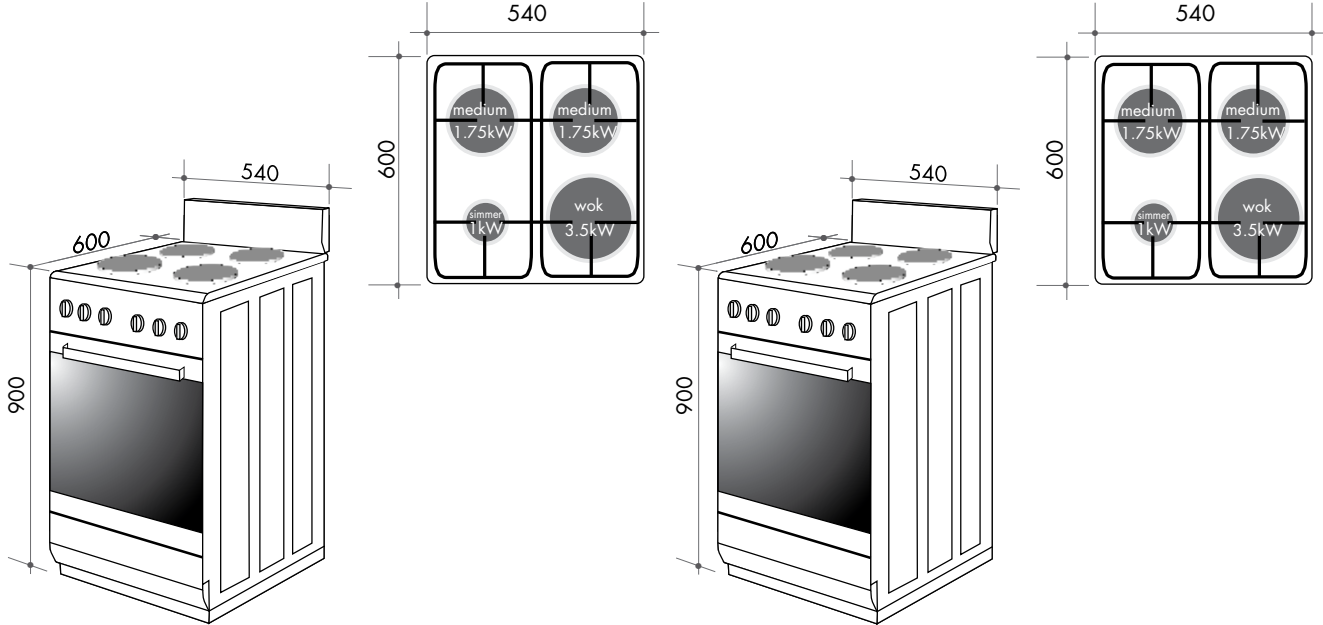

AFGG54EG

AFGG54

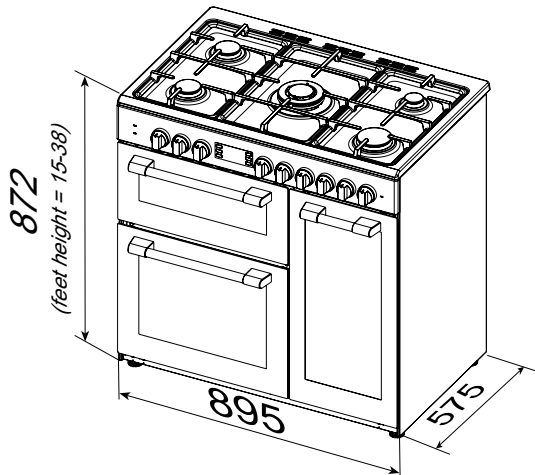

AFGR935B

PLEASE NOTE:
 All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.

MICROWAVE OVENS

AMO31X

microwave oven

- stainless steel exterior and interior
- 31 litres
- Easi-tronic operation
- push-button door
- power output 900W
- 315mm tempered glass turntable
- 6 auto cook menus
- 5 power settings
- end-cooking signal
- child safety lock
- LED display
- ATK1 stainless steel trimkit for integration above oven

i For technical diagrams please refer to page 70-71
total electrical consumption: 0.9 kW/hr
10 Amp GPO, 3-pin plug and cord



AMC31X

convection microwave oven

- stainless steel exterior and interior
- 31 litres
- Easi-tronic operation
- push-button door
- power output 900W
- convection 1350W
- 315mm tempered glass turntable
- convection cooking function
- 6 auto cook menus
- 5 power settings
- end-cooking signal
- child safety lock
- LED display
- ATK1 stainless steel trimkit for integration above oven

i For technical diagrams please refer to page 70-71
total electrical consumption: 0.9 kW/hr
10 Amp GPO, 3-pin plug and cord



COOK

MICROWAVE OVENS

AMC34BI

built-in convection microwave oven

- stainless steel exterior and interior
- 34 litres
- digital control
- push-open door
- 1000W microwave power
- 1100W grill
- 2400W convection
- LED cavity lighting
- white LCD display
- child safety lock
- 10 auto cooking menus
- built-in installation

i For technical diagrams please refer to page 70-71
total electrical consumption: 0.9 kW/hr
10 Amp GPO, 3-pin plug and cord



AMO31TK

microwave oven with integrated trimkit

- stainless steel exterior and interior
- 31 litres
- Easi-tronic operation
- push-button door
- power output 900W
- 315mm tempered glass turntable
- 6 auto cook menus
- 5 power settings
- end-cooking signal
- child safety lock
- LED display

i For technical diagrams please refer to page 70-71
total electrical consumption: 0.9 kW/hr
10 Amp GPO, 3-pin plug and cord




MICROWAVE OVENS

AMG28TKB

microwave oven

- 28L cavity size
- 900W microwave power
- 8 auto-cooking options with automatic weight settings
- 5 Power lever
- Child safety lock
- Speedy cooking
- Stainless steel cavity
- Black front panel & trim kit-4mm gap
- Silver housing cabinet
- defrost by time & weight
- quick start
- LED display
- push handle

i For technical diagrams please refer to page 70-71
total electrical consumption: 0.9 kW/hr
10 Amp GPO, 3-pin plug and cord




AMO25TK

microwave oven

- microwave oven with integrated trimkit
- Easi-tronic fully built-in
- 900W power
- 1200 grill power
- 25-litres capacity
- 5 power settings
- 60-minutes digital timer
- push handle door
- auto weight defrost setting
- end-cooking signal
- LED display
- Auto menu settings
- two combination cooking options
- 10 Amp GPO, 3-pin plug and cord

i For technical diagrams please refer to page 70-71
total electrical consumption: 0.9 kW/hr
10 Amp GPO, 3-pin plug and cord



COOK


MINI KITCHEN

AOMK1


bench top static oven and cook top

- white enamel body
- oven capacity: 22 litres
- 4 cooking functions
- 1000W grill
- control knob thermostat
- 50–250°C
- double-glazed vented glass door
- rear steam venting system
- two EGO plates —
large, 1.2 kW
small, 1.0kW
- 6 power levels on each cooking zone

i For technical diagrams please refer to page 70-71
Total electrical consumption: 2.3 kW/hr
10 Amp GPO, 3-pin plug and cord




TECHNICAL INFORMATION

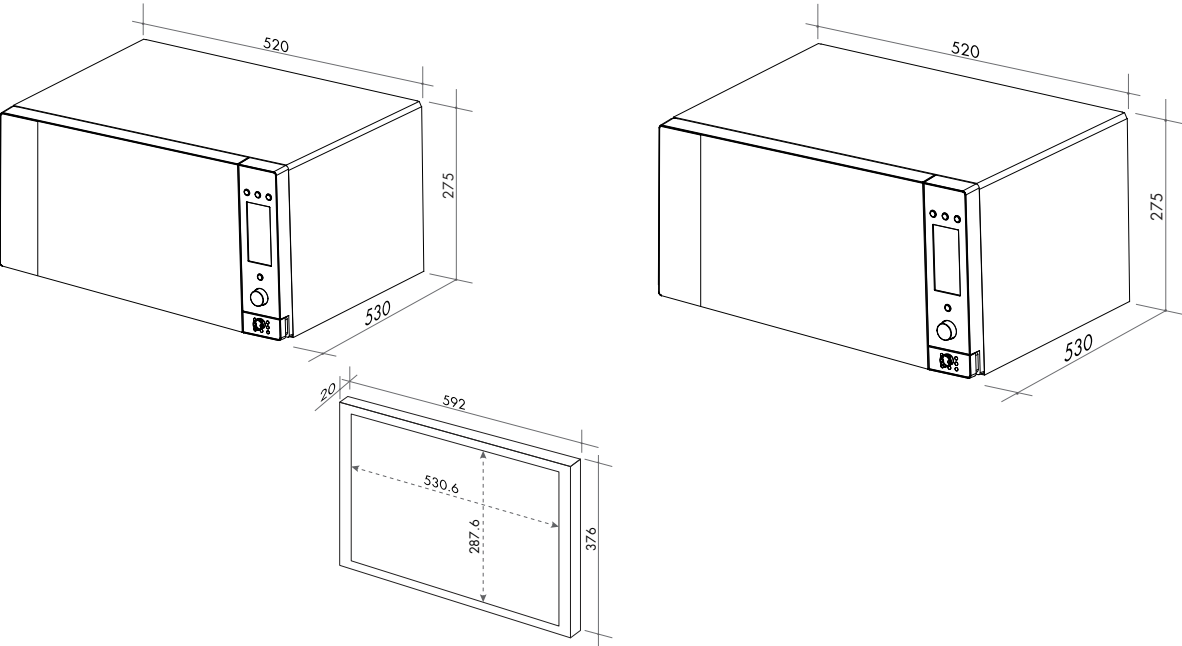

AMO31X & ATK1

AMC31X

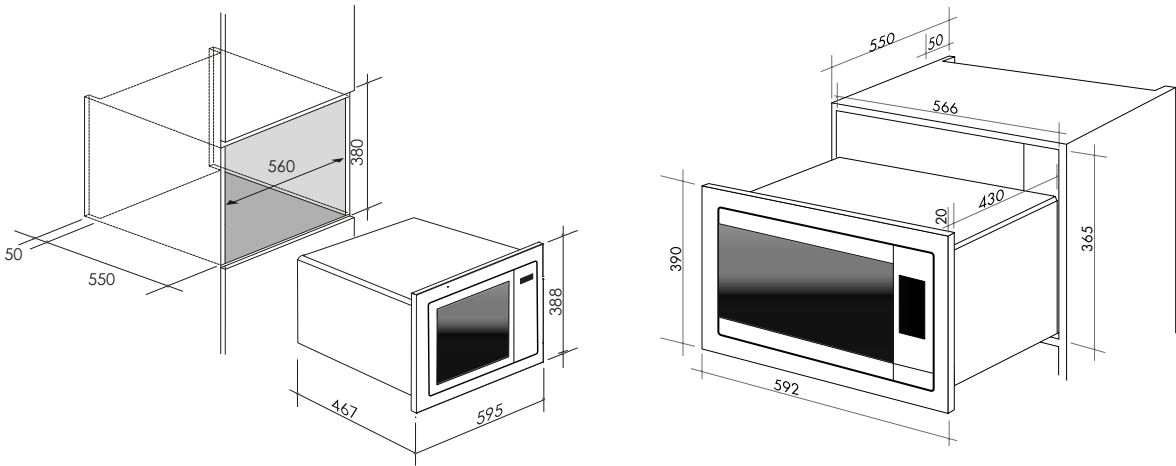


AMC34BI

AMO31TK


PLEASE NOTE: All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.

TECHNICAL INFORMATION

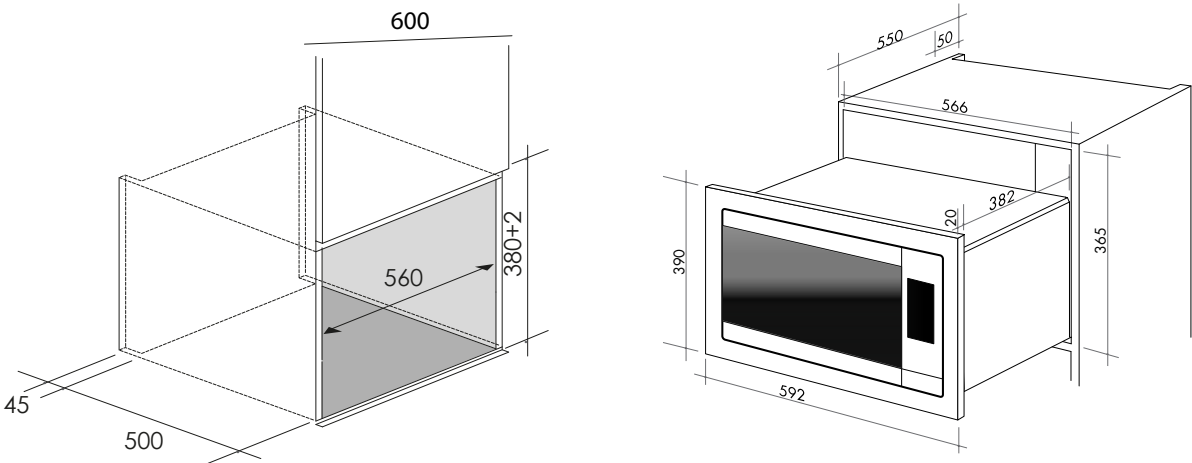

AMG28TKB

AMO25TK

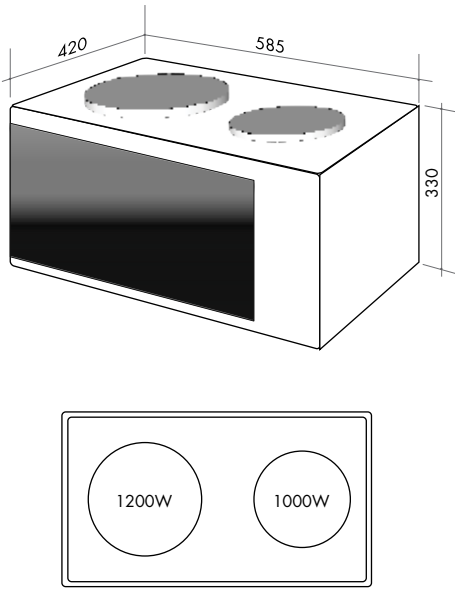

AOMK1

PLEASE NOTE: All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.

ALFRESCO & REFRIGERATION



ALFRESCO KITCHEN

CABINETRY

ABS SERIES

freestanding alfresco kitchen

Construction


- Steel frame: galvanised and powder coated to protect from corrosion
- Steel cabinet and rear panel: galvanised and vacuum wrapped in compressed vinyl with a timber texture look
- Vinyl colour: Cadbury Oak Linear
- Substrate: PVC board to reduce weight, act as fire insulator, does not attract humidity
- Cladding: 6mm Neolith stone finish, seamless, hard wearing, true to touch, scratch and stain resistant
- Cladding Item name: Basalt Black. Characterised by natural basalt rock, Basalt Black is a darker stone that is rich in subtle details. This stone's shadowy tones provide a perfect contrast to lighter elements in the home.

Warranty

The stone bench carries a warranty of 25 years, underwritten by Neolith. All steel elements carry a warranty of 5 years against material failure.

Design

Assembly: designed to be assembled by two people in under one hour, tools supplied (spanner and allen key)
Symmetrical design: the unit can be assembled left or right oriented, this means that the BBQ unit can sit on the left or right-hand side of the outdoor kitchen bench
Dimensions assembled: 2353mmW x 680mmD x 950mmH
Feet: height adjustable to compensate for uneven floors to +/-50mm
Colour: benchtop: Basalt Black; timber look finish: Cadbury Oak Linear
Packaging: designed to transport as flat packed unit, in four packs, total weight of 160kg



BENCHTOP



CABINETS



ALFRESCO KITCHEN

CABINETRY



ABBQPACK1: INCLUDED CABINETRY & APPLIANCES

Cabinetry

- ABS1 - Artusi Alfresco Kitchen *(ABS2 available with no sink space)*

Standard Appliance Inclusions

- ABBQ1B - Artusi Built-in Gas BBQ *(for information, click here)*
- ABFLAT - Artusi Built-in Gas BBQ Flat Lid ABBQPACK1 *(for information, click here)*
- ABHOOD - Artusi Built-in Gas BBQ Dome Lid - ABBQPACK2 *(for information, click here)*
- AGS411B - Artusi Granite Stone Sink *(for information, click here)*
- ASM101B - Artusi Mixer Tap *(for information, click here)*
- ABC1B - Artusi Outdoor Bar Fridge *(for information, click here)*

OTHER VARIATIONS AVAILABLE

ABBQPACK2 : included Cabinetry (ABS1) & Appliances as mentioned above with ABHOOD BBQ lid

ABBQPACK3 : included Cabinetry (ABS2 - no sink space) & Appliances with ABFLAT BBQ lid (no sink space & no sink or tap provided)

ABBQPACK4 : included Cabinetry (ABS2 - no sink space) & Appliances with ABHOOD BBQ lid (no sink space & no sink or tap provided)



For technical diagrams please refer to page 86-89

ALFRESCO

BBQ

ABBQ1B

Built-in Gloss Black BBQ

- Meticulous design with seamless finish
- finished in gloss black enamel
- Automatic Piezo battery ignition with concealed D cell battery compartment
- Interchangeable hotplate configuration for different cooking styles
- 2 x solid cast iron removable grill plates
- 1 x cast iron removable flat hotplate
- Anti-warp engineered hotplate
- Hotplate and grills include self locking notches
- Stainless steel burners with flame failure
- Total burner power output 14kW (European tested)
- 1 x removable grease container for oil and residue within the cooking area
- 1 x removable main catcher at the front of the grills with a drain system
- Side control knobs
- Oil/fat reservoir
- Available in natural gas or LPG pre-set

AVAILABLE COMPANION PRODUCTS

- ABHOOD - Roasting dome BBQ hood with thermostat
- ABFLAT - Slimline Flat BBQ lid
- BBQCOVERH - Canvas cover for ABHOOD
- BBQCOVERF - Canvas cover for ABFLAT



For technical diagrams please refer to page 86-89
Power Consumption: D Cell Battery
Gas Consumption: 52 mj/h (natural gas)
5/8" connection fitting hose and regulator assembly included



Pictured: ABBQ1B built-in barbecue with ABHOOD dome lid



AVAILABLE LID
ABHOOD: Roasting dome BBQ hood with thermostat (sold separately)



AVAILABLE LID
ABFLAT: Slimline flat lid (sold separately)

ALFRESCO

BBQ

ABBQM

Built-in Stainless Steel BBQ


- Meticulous design with seamless finish
- AS316 stainless steel (suitable for outdoor and ocean- front environments)
- Automatic Piezo battery ignition with concealed D cell battery compartment
- Painted black BBQ interior
- Interchangeable hotplate configuration for different cooking styles
- 2 x solid cast iron removable grill plates
- 1 x cast iron removable flat hotplate
- Anti-warp engineered hotplate
- Hotplate and grills include self locking notches
- Stainless steel burners with flame failure
- Total burner power output 14kW (European tested)
- 1 x removable grease container for oil and residue within the cooking area
- 1 x removable main catcher at the front of the grills with a drain system
- Side control knobs
- Oil/fat reservoir
- Available in natural gas or LPG pre-set

AVAILABLE COMPANION PRODUCTS

- ABBQMH - 316 Stainless steel roasting dome BBQ hood with thermostat
- ABBQMF - Slimline Flat BBQ lid
- BBQCOVERH - Canvas cover for ABBQMH & ABBQ304H
- BBQCOVERF - Canvas cover for ABBQMF



For technical diagrams please refer to page 86-89
Power Consumption: D Cell Battery
Gas Consumption: 52 mj/h (natural gas)
5/8" connection fitting hose and regulator assembly included



Pictured: ABBQM built-in barbecue with ABBQMH dome lid



AVAILABLE LID
ABBQMH: 316 stainless steel hood lid (sold separately)




AVAILABLE LID
ABBQMF: 316 stainless steel flat lid (sold separately)

ALFRESCO

ABCIB
'Australia's Coldest' Outdoor bar beverage centre

- black glass door (triple glazed),
- black body
- 100 litre internal capacity
- 330ml bottles: 66
- Shelves: 10 interchangeable half depth (5 levels)
- freestanding or under-bench installation
- -5–10°C temperature range
- climate type: T, 43°C ambient
- ventilated cooling, auto defrost
- 3 retractable shelves
- touch controls
- LED lighting
- heated triple glazed glass door
- Brushed black handle moulded onto door frame
- party mode- runs at -5°C & maintains the internal temperature for up to 6 hours
- turbo mode- speeds up the cooling process (gives you 1 hour at -5°C)
- door open alarm

 For technical diagrams please refer to page 86-89
10amp power cord


REFRIGERATION




ALFRESCO

AOFIS
Back bar beverage centre

- hammered aluminium interior
- stainless steel door
- resistant to rain
- black weatherproof exterior
- 118 litre internal capacity
- 330ml bottles: 138
- 500ml bottles: 78
- Shelves: 2 (3 levels)
- freestanding or under-bench installation
- -2–10°C temperature range
- climate type: up to 38°C ambient temperature
- ventilated cooling with auto defrost
- digital touch controls
- LED lighting
- door lock
- spring-loaded self-closing door
- stainless steel door frame & bar handle
- adjustable feet
- withstands high humidity
- UV-safe stainless steel

 For technical diagrams please refer to page 86-89
10amp power cord

REFRIGERATION

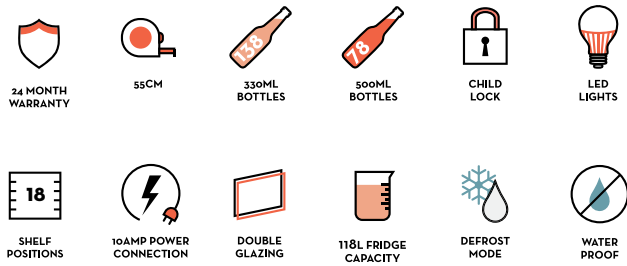

ALFRESCO


AOF2S Back bar beverage centre

- hammered aluminium interior
- resistant to rain
- stainless steel doors
- black weatherproof exterior
- 190 litre internal capacity
- 330ml bottles: 190
- 500ml bottles: 110
- Shelves: 4 (3 levels)
- freestanding or under-bench installation
- -2–10°C temperature range
- climate type: up to 38°C ambient temperature
- ventilated cooling with auto defrost
- digital touch controls
- LED lighting
- door locks
- spring-loaded self-closing door
- stainless steel door frame & bar handle
- adjustable feet
- withstands high humidity
- UV-safe stainless steel

i For technical diagrams please refer to page 86-89
10amp power cord



REFRIGERATION

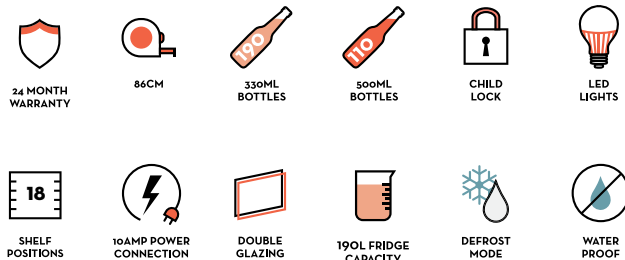

ALFRESCO

AOF3S Back bar beverage centre

- hammered aluminium interior
- resistant to rain
- stainless steel doors
- black weatherproof exterior
- 307 litre internal capacity
- 330ml bottles: 304
- 500ml bottles: 247
- Shelves: 6 (3 levels)
- freestanding or under-bench installation
- -2–10°C temperature range
- climate type: up to 38°C ambient temperature
- ventilated cooling with auto defrost
- digital touch controls
- LED lighting
- door locks
- spring-loaded self-closing door
- stainless steel door frame & bar handle
- adjustable feet
- withstands high humidity
- UV-safe stainless steel

i For technical diagrams please refer to page 86-89
10amp power cord



REFRIGERATION




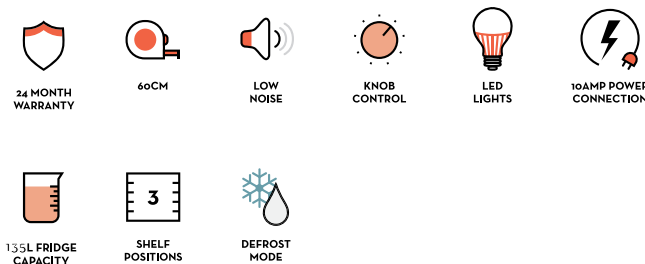
REFRIGERATION

AINT119/NF

fully integrated bar fridge

- white interior
- 135L net capacity
- 12 hour storage in the event of power failure
- Static vented cooling system
- Current (A) <10
- A+ Energy rating
- Single compressor
- Automatic fridge defrost
- 5 cooling levels
- Mechanical knob thermostat
- power LED cavity light
- Supplied with right hand hinge (reversible)
- heavy duty Hettich integrated door hinges
- 3x adjustable glass shelves (1x split shelf with direct access to crispers)
- 2x Crystal clear door shelves
- 2x crispers
- 1x transparent egg tray
- Noise: 40db/A

 For technical diagrams please refer to page 86-89
10amp power cord



CHILL

REFRIGERATION

AINT119

fully integrated bar fridge & freezer

- white interior
- 111L total net capacity
- 95L (fridge)
- 16L (freezer)
- 2kg freezing capacity
- 12 hour storage in the event of power failure
- Single compressor
- Static vented cooling system
- Current (A) <10
- Automatic fridge defrost
- Manual freezer defrost
- Adjustable refrigerator temperature
- 5 cooling levels (fridge)
- Mechanical knob thermostat
- power LED cavity light
- Supplied with right hand hinge (reversible)
- heavy duty Hettich integrated door hinges
- 2x adjustable glass shelves (1x split shelf with direct access to crispers)
- 2x crystal clear door shelves
- 2x crispers
- 1x transparent ice-holder trays
- 1x transparent egg tray
- Noise: 40db/A

*integrated door panel not supplied

 For technical diagrams please refer to page 86-89
10amp power cord



CHILL

REFRIGERATION


ARET330 B & W

Retro style refrigerator

- white plastic interior
- Plastic painted door exterior
- one-piece painted metal exterior
- refrigerator capacity: 251 litres net
- freezer capacity: 26 litres net
- freestanding installation
- temperature range:
 - refrigeration section: 0–10°C
 - freezer section: -18–0°C
- climate type: T, up to 43°C ambient
- static cooling
- 4x glass shelves (adjustable)
- 5x transparent shelf on door (adjustable)
- 1x wine or beverage shelf
- salad crisper drawer
- height adjustable feet
- manual temperature control
- LED lighting
- colour options: Matt black, Gloss white



For technical diagrams please refer to page 86-89
10amp power cord




AVAILABLE MODELS:
ARET330W (gloss white)
ARET330B (matt black)

CHILL




TECHNICAL INFORMATION

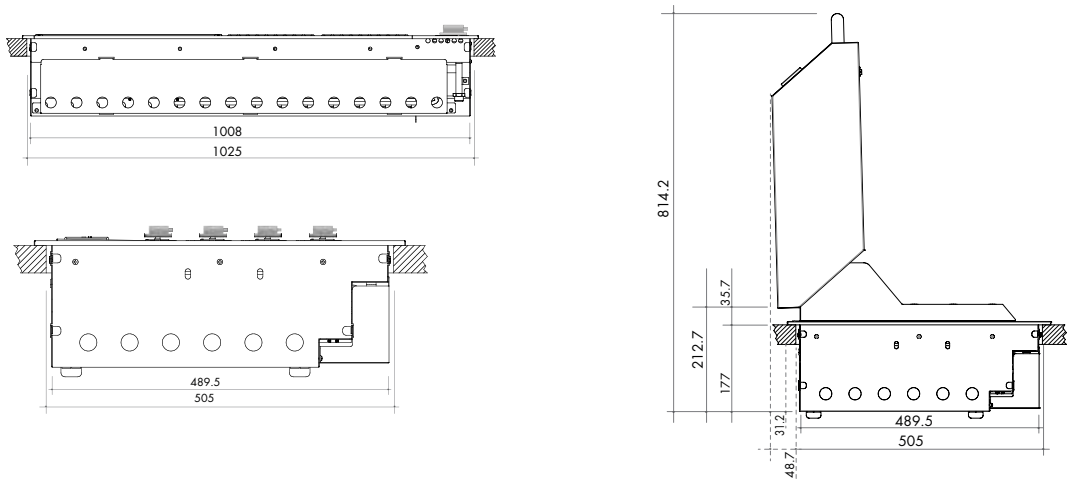


ABBQ1B & ABBQM

ABHOOD & ABBQM

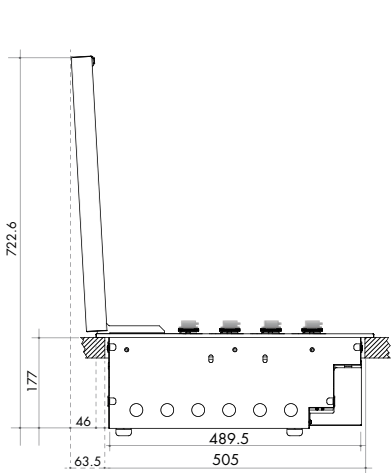


ABFLAT & ABBQMF

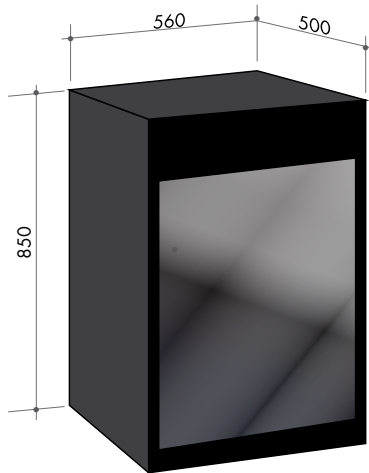


ABC1B

PLEASE NOTE: All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.


TECHNICAL INFORMATION

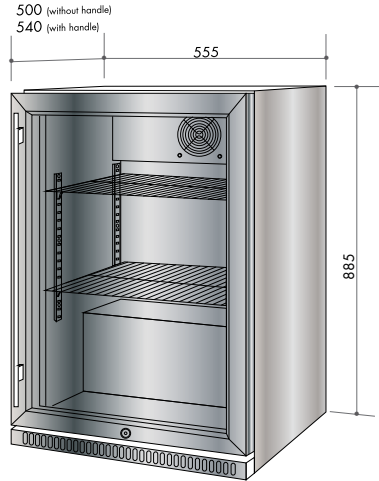


AOF1S

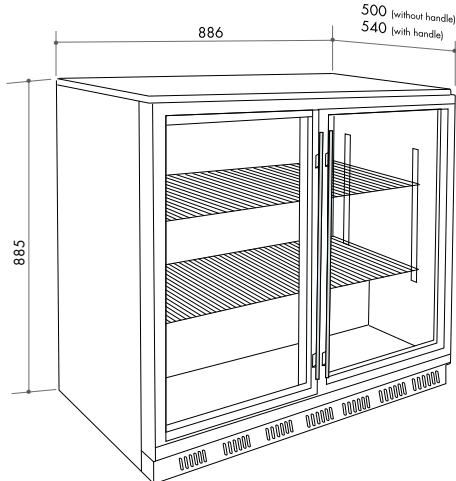


AOF2S

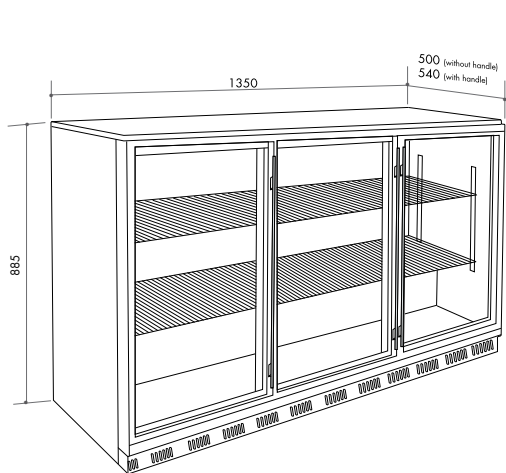

AOF3S

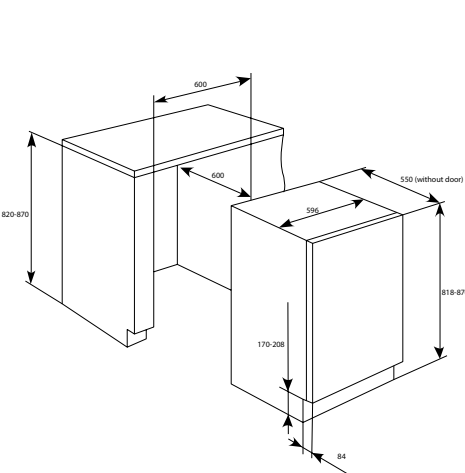


AINT119 & AINT119NF
for door size and fitting guide,
please refer to the operating
and installation manual

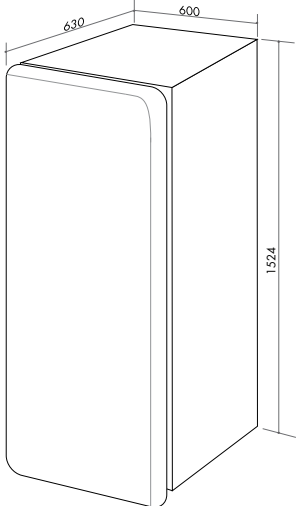

ARET330

PLEASE NOTE: All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.

TECHNICAL INFORMATION

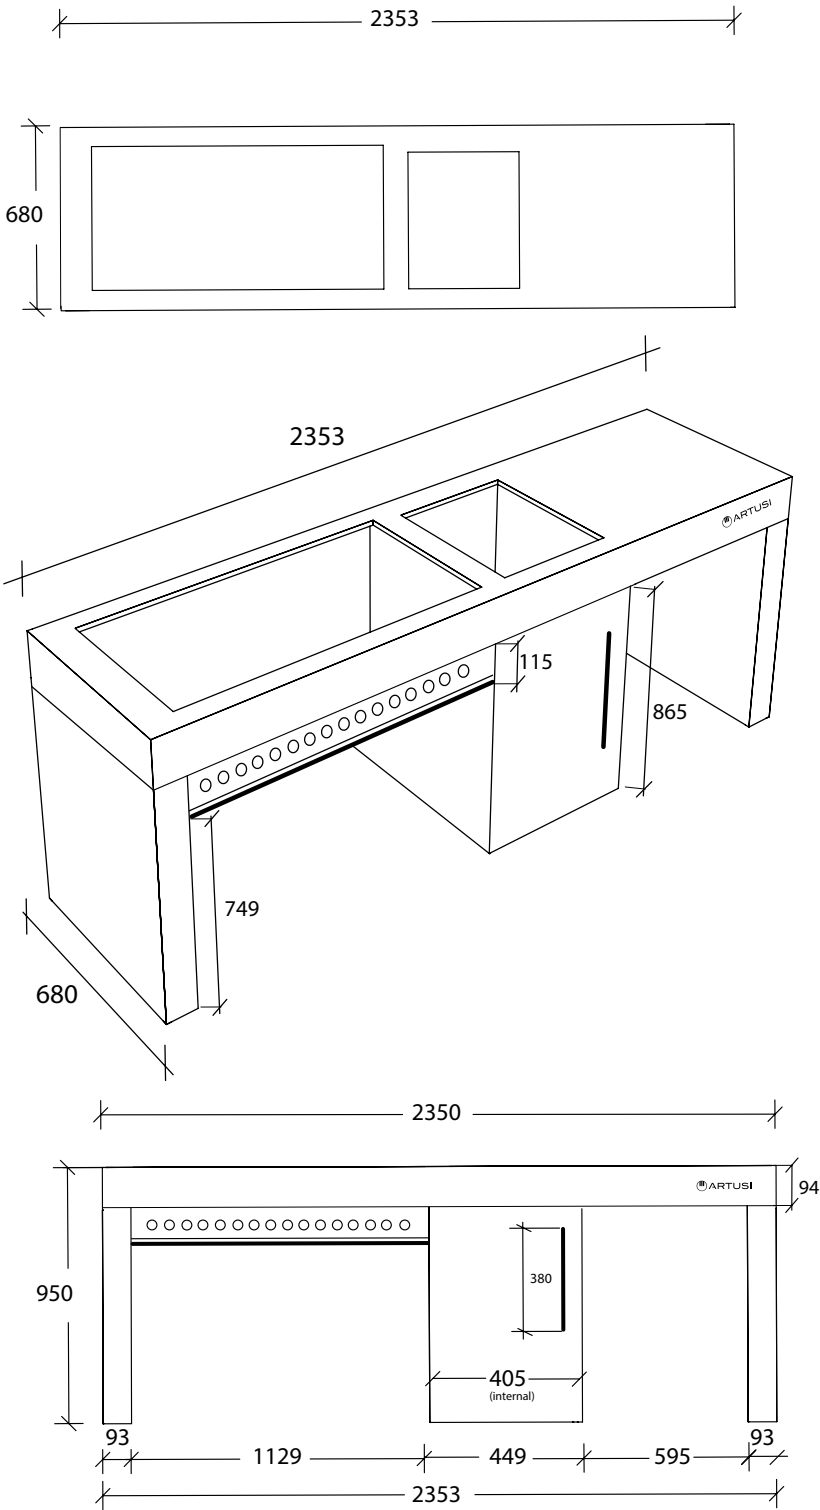


* includes adjustable feet upto 10mm

ABS1

PLEASE NOTE: All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.

TECHNICAL INFORMATION

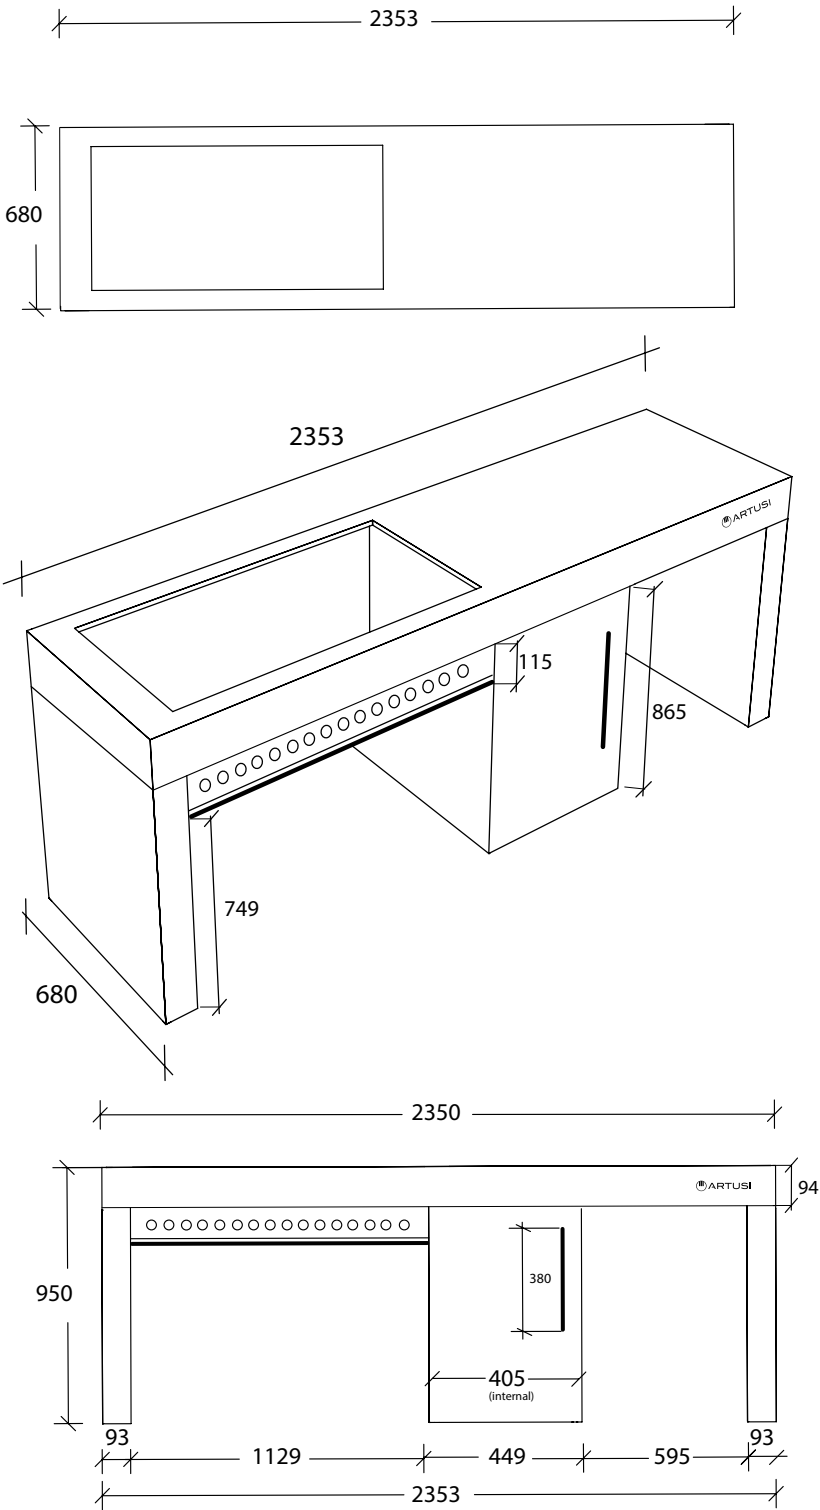

* includes adjustable feet upto 10mm

ABS2

PLEASE NOTE: All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.

RANGE HOODS



RANGE HOODS

ACH600X & ACH900X

60cm & 90cm canopy wall mount range hood

- stainless steel
- 2 x aluminium filters
- front push-button control
- 900m³/hr air flow
- 58 dBA
- 2 x 24W light bulbs
- 3 speeds
- Ø150mm ducting | recirculation kit available
- 10 AMP electrical connection
- 3-pin plug and cord

i For technical diagrams please refer to page 102-105
240W input power
160W maximum motor power



Pictured: ACH600X

Pictured: ACH900X



ACH905X

90cm canopy wall mount range hood

- stainless steel
- aluminium filters
- 2 x charcoal filters
- front push-button control
- 760m³/hr airflow (maximum)
- 60 dBA
- 2 x 1.5W LED lights
- 3 speeds
- 150mm duct outlet

i For technical diagrams please refer to page 102-105
input power: 198W
maximum motor power: 195W
160cm power cord with standard 3-pin plug



COOK

RANGE HOODS

ACG700X & ACG900X

70cm & 90cm canopy wall mount range hood

- AS304 stainless steel + glass
- modern curved glass design
- front button control
- 900m³/hr airflow
- 58 dBA
- 2 x LED lights
- 3 speeds
- Ø150mm ducting | recirculation kit available
- available in 70cm and 90cm widths

i For technical diagrams please refer to page 102-105
10 AMP electrical connection, 3-pin plug and cord



Pictured: ACG700X

Pictured: ACG900X



ATH900 B & X

90cm canopy wall mount range hood

- Stainless steel construction
- Black glass facia (ATH900B)
- Stainless steel facia (ATH900X)
- 2 x LED lights
- Touch control operation
- 3 x Aluminium filters
- 3 speed settings
- 150mm ducting diameter
- Recirculating installation is optional
- 2 x Charcoal filters are supplied
- Replacement Charcoal filters available from Artusi: part number: 12173000000039
- Flue height: 500mm long (2 pieces supplied)

i For technical diagrams please refer to page 102-105
10 AMP electrical connection, 3-pin plug and cord



Pictured: ATH900X

Pictured: ATH900B



RANGE HOODS

ACH12BBQ

120cm barbecue range hood

- full stainless steel construction
- dual motors with 3 powerful air extraction speed
- 1000m³/hr airflow from each motors
- two motors: 218W each
- removable stainless steel baffle filters designed for maximum performance and easy cleaning
- 6 x LED lights will perfectly illuminate the cooking area
- wall mount installation
- twin duct outlets (one for each motor) provides maximum performance
- installation kit provided

i For technical diagrams please refer to page 102-105
170cm power cord length
10 AMP plug & lead

Minimise grease and smoke when cooking on your barbecue with the Artusi twin-motor range hood. Twin turbo motors combined with a custom-designed ventilation system. Suitable for any size barbecue (up to 120cm wide).

COOK



RANGE HOODS

ACH12BBQB

120cm barbecue range hood

- 304 Stainless steel with black glass fascia
- 2000 m³/h air flow
- Twin 198W full sealed copper motors
- 200mm air outlet diameter
- 3 extraction speeds
- LCD display
- Touch control operation
- 6 x LED cooking lights will perfectly illuminate the cooking area
- AS304 stainless steel baffle filters
- 72 db/A noise level
- Wall mount installation
- Flue height 2 pieces (500mm each)

i For technical diagrams please refer to page 102-105
170cm power cord length
10 AMP plug & lead

Minimise grease and smoke when cooking on your barbecue with the Artusi twin-motor range hood. Twin turbo motors combined with a custom-designed ventilation system. Suitable for any size barbecue (up to 120cm wide).

COOK



RANGE HOODS

AFR650 X OR W

60cm fixed range hood

- AS430 fingerprint-proof stainless steel
- 2 x aluminium filters
- 3 speeds
- push button control
- 320m³/hr airflow (when ducted)
- 1 x LED light globes
- Installation: Under mount from top or Wall mount from rear
- front recirculation vent
- Ø120mm ducting hole from the top
- recirculation switch from motor housing

i For technical diagrams please refer to page 102-105
10 AMP electrical connection, 3-pin plug and cord
input power: 120W




AFR60S & AFR60W

60cm fixed range hood

- Available with a silver glass or white glass facia
- 2 x aluminium filters
- 3 speeds
- Touch control operation
- 270m³/hr airflow
- 2 x incandescent light globes
- carbon filter included
- recirculation vent
- Ø120mm ducting hole
- recirculation kit available

i For technical diagrams please refer to page 102-105
10 AMP electrical connection, 3-pin plug and cord
input power: 120W



Pictured: AFR60S



Pictured: AFR60W

COOK


RANGE HOODS

AUM75X

75cm concealed under mount range hood

- Specifically designed for use with induction cooktops where condensation build up exists
- Stainless steel
- stainless steel baffle filters
- filters sit at an angle designed for when condensation turns into water and flows to the catchment area at the back of the hood
- 3 x LED lights
- 760 m³/h airflow net
- 4 speeds
- high performance motor
- flush mounted
- easy installation
- dishwasher safe filters

i For technical diagrams please refer to page 102-105
10 AMP electrical connection, power lead: 165mm



COOK

RANGE HOODS

AUM60 & AUM90


60cm & 90cm concealed under mount range hood

- Painted grey fascia and painted body
- aluminium grease filters
- carbon filter included for re-circulating
- recirculation vent
- 3 extraction speeds
- push-button control
- 750m³/hr airflow
- 2 x 1.5W LED lights
- 39.5 dBA (power level 1)
- Ø150mm ducting

i For technical diagrams please refer to page 102-105
10 AMP electrical connection, 3-pin plug and cord
150W motor



Pictured: AUM60

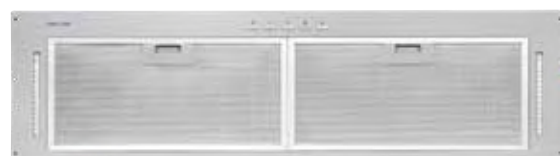

Pictured: AUM90

AUM51X

51cm concealed under mount range hood

- AS430 fingerprint-proof stainless steel fascia and painted body
- 645m³/hr airflow at maximum speed
- 45.5 dBA (speed 1)
- slider controls
- aluminium grease filter
- 2 x extraction levels
- 2 x 28W halogen lights
- duct outlet Ø120mm
- installation with outlet tube to the exterior/ recirculating
- easy installation system

i For technical diagrams please refer to page 102-105
10 AMP electrical connection, 3-pin plug and cord
100W maximum power consumption



COOK

RANGE HOODS

ASO601RX & ASO901RX

60cm & 90cm recirculated slide out range hood

- stainless steel rail, grey body
- designed in Spain
- aluminium mesh filter, dishwasher safe
- 3 speeds, slide control
- 350m³/hr airflow
- 1 x 28W halogen globe
- 2 x front rails included to suit different installation methods (40mmH or 70mmH)
- Ø120mm ducting with 125mm converter piece provided
- carbon filter included for recirculating

i For technical diagrams please refer to page 102-105
10 AMP electrical connection, 3-pin plug and cord
input power: 120W



Pictured: ASO601RX



Pictured: ASO901RX



Pictured: ASO601RX under side



Pictured: ASO901RX with 70mm front rail prepared for recirculated installation

RANGE HOODS

COOK

ASO620X & ASO920X

60cm & 90cm slide out range hood

- stainless steel front rail
- painted grey body
- 2 x aluminium mesh filters
- 3 extraction speeds
- slide control
- 600m³/hr airflow
- 59–65 dBA (minimum — maximum)
- 1 x 40W incandescent light globe
- 1x 40mm front rail
- ducted only
- Ø120mm ducting with 125mm converter piece provided

i For technical diagrams please refer to page 102-105
10 AMP electrical connection, 3-pin plug and cord
input power: 120W



Pictured: ASO620X




Pictured: ASO920X

ASO600RX & ASO900RX

60cm & 90cm slide out range hood

- AS430 fingerprint-proof stainless steel facia
- 3 x aluminium filters
- recirculation vent
- 3 extraction speeds
- slide control
- 270m³/hr airflow
- 2 x incandescent light globes
- 2 x front rails included to suit different installation methods (40mmH or 68mmH)
- Ø120mm ducting recirculation kit available
- carbon filter included for recirculating


i For technical diagrams please refer to page 90-92
10 AMP electrical connection, 3-pin plug and cord
input power: 120W



Pictured: ASO600RX - 60cm




TECHNICAL INFORMATION

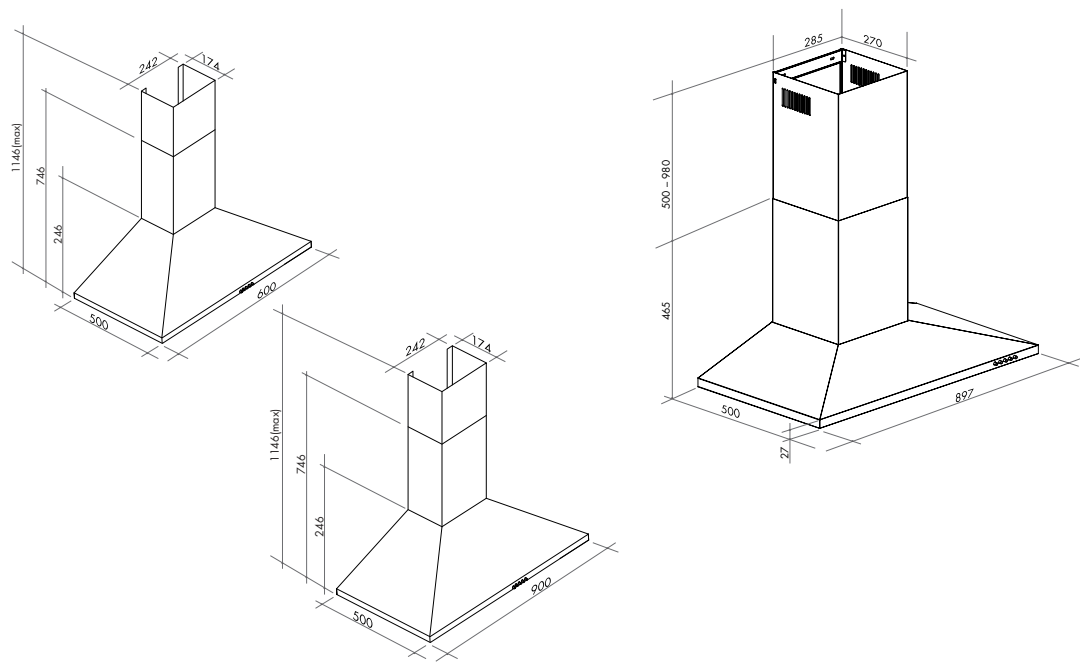

ACH600X & ACH900X


ACH905X

TECHNICAL INFORMATION

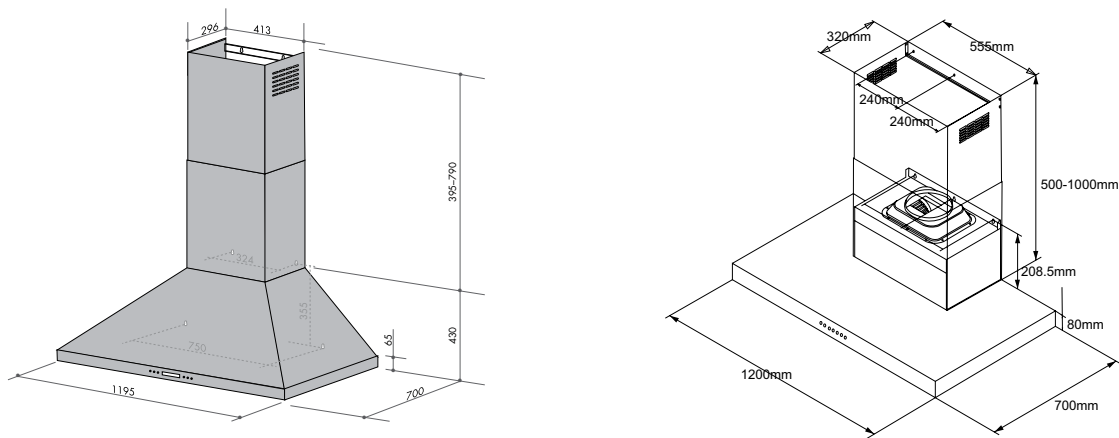


ACH12BBQ

ACH12BBQB

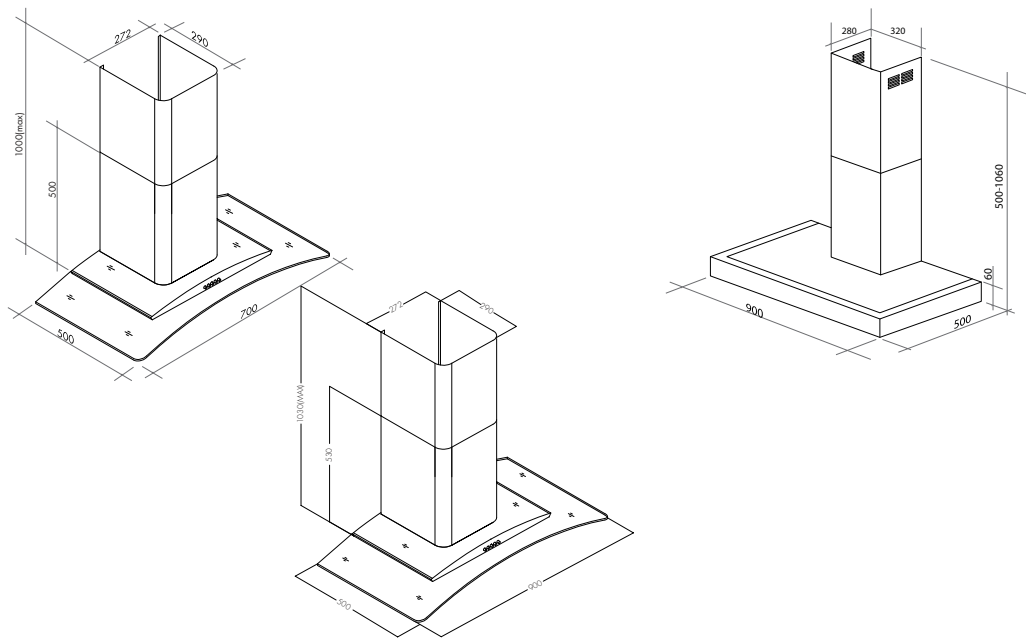

ACG700X & ACG900X

ATH900 SERIES

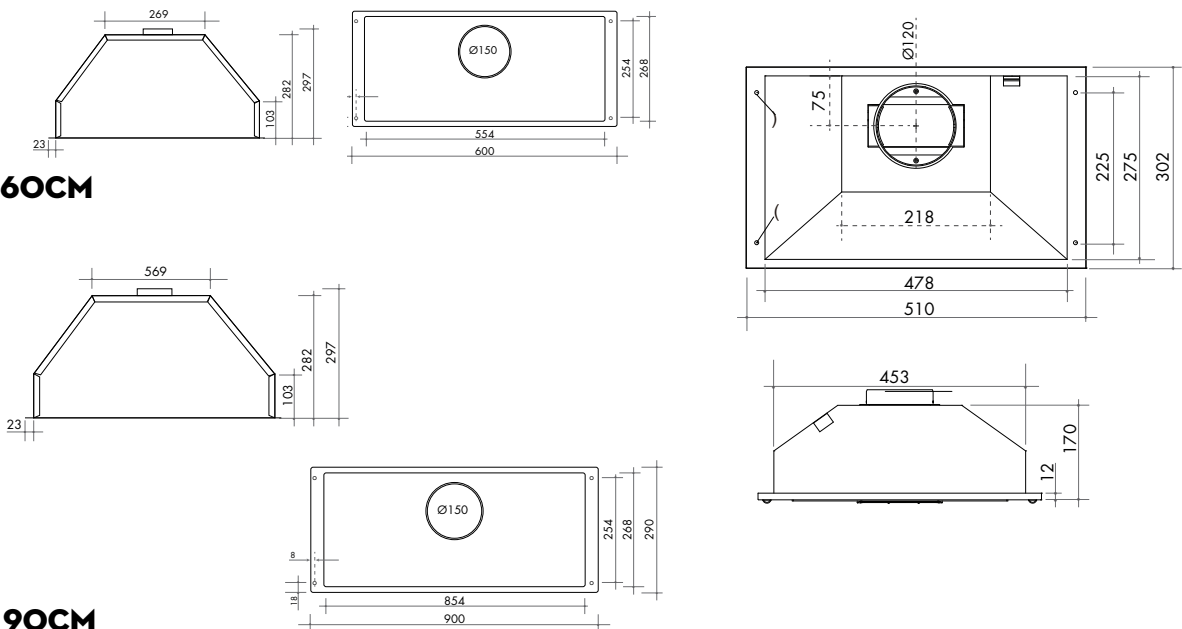


AUM60 & AUM90

AUM51


PLEASE NOTE:
 All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.

PLEASE NOTE:
 All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.

TECHNICAL INFORMATION

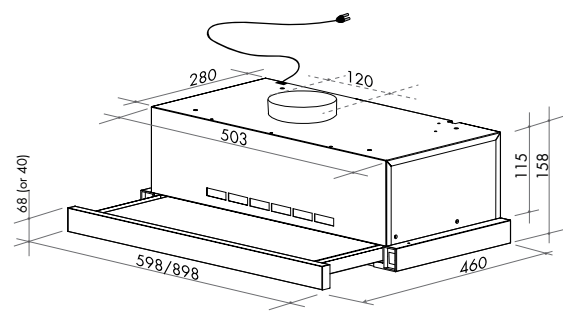


ASO6OORX & ASO9OORX

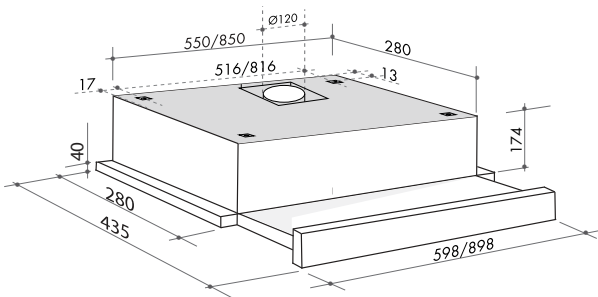


ASO6O1X, ASO9O1X, ASO62OX & ASO92OX


TECHNICAL INFORMATION

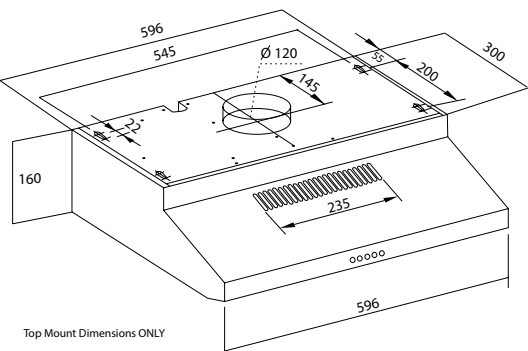


AFR650

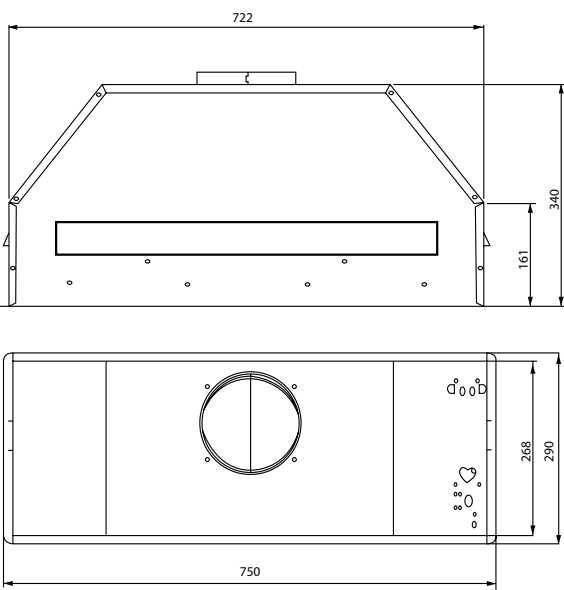

AUM75X

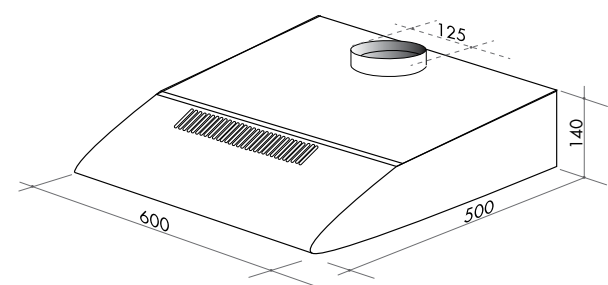

AFR6X

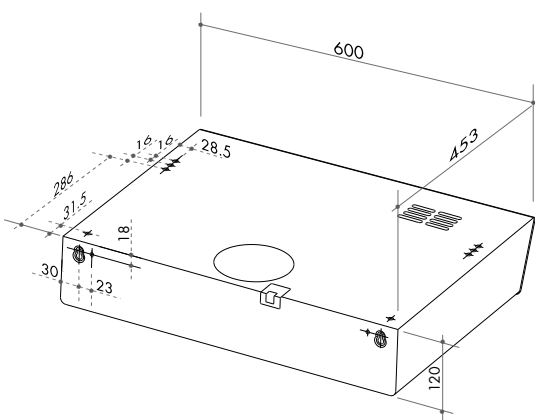

AFR6OS & AFR6OW

PLEASE NOTE:
All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.

PLEASE NOTE:
All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.



SINKS

SINKS

OUR REVOLUTIONARY TECHNOLOGY

Our manufacturing system uses a moulding technology system, meaning Artusi Granitek sinks consist of a substantial and even distribution of its components including within the sink mass. This technology is internationally patented.


AGS1162

Twin Bowl Sink with Drain

- Overall size (mm): 1160 x 510
- Built-in hole size (mm): 1140 x 480
- Bowl base size (mm): 800
- Bowl depth (mm): 200
- Inset installation
- Anti-bacterial surface
- Reversible installation available
- Internal bowl water overflow
- Designer waste plug
- Drain area

AVAILABLE ACCESSORIES:

ARIO1300 - Drain Rack



AGS1162B



AGS1162W

SINK KIT:

Space saving siphon, waste and pre-mounted hooks, rectangular overflow



For technical diagrams please refer to page 116-117

WASH

SINKS

CERAMISATION COMPARISON:

This is a specific method in colouring the granite-particles. Their colouring of the materials happens not only on the surface, but also in all the particles' mass, through a particular firing process heating the material to over 700°C. This ensures the colour can penetrate deep, reaching particles' core. The result give the end product the highest resistance against discolouring.


AGS1001

Single Bowl Sink with Drain

- Overall size (mm): 1000 x 510
- Built-in hole size (mm): 980 x 480
- Bowl base size (mm): 600
- Bowl depth (mm): 200
- Inset installation
- Anti-bacterial surface
- Reversible installation available
- Internal bowl water overflow
- Designer waste plug
- Drain area

AVAILABLE ACCESSORIES:

ARIO1300 - Drain Rack



AGS1001B



AGS1001W

SINK KIT:

Space saving siphon, waste and pre-mounted hooks, rectangular overflow



For technical diagrams please refer to page 116-117

WASH



SINKS

OUR MOULDING SYSTEM

We have invented a dynamic mould, which results in evenly distributing all the components included in the sink mass, this allows us to keep the optimal usable space in the sinks bowl.


AGS792

Twin Bowl Sink

- Overall size (mm): 790 x 500
- Built-in hole size (mm): 770 x 480
- Bowl base size (mm): 800
- Bowl depth (mm): 200
- Inset installation
- Anti-bacterial surface
- Waste is 58mm to mixer
- Designer waste plug

AVAILABLE ACCESSORIES:

AGBO13O2 - Drain Rack



SINK KIT:

Space saving siphon, waste and pre-mounted hooks, rectangular overflow



For technical diagrams please refer to page 116-117



WASH



AGS792B



AGS792W

SINKS


OUR MOULDING SYSTEM

This method has great long term results such as: Improved thermal shock resistance (+100%), Better resistance to high temperatures (+30%), Improved impact resistance (+30%), Improved appearance of all the sinks visible surfaces (including the base), Easy to clean & More resistant to abrasion of the surface and bowls.

AGS791

Single Bowl Sink

- Overall size (mm): 790 x 500
- Built-in hole size (mm): 770 x 480
- Bowl base size (mm): 800
- Bowl depth (mm): 200
- Inset installation
- Anti-bacterial surface
- Waste is 58mm to mixer
- Designer waste plug

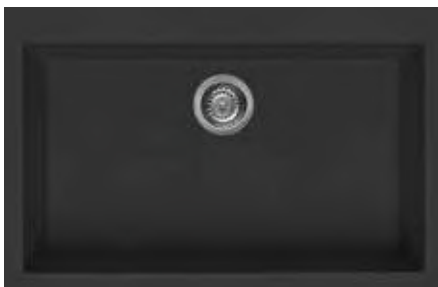

AGS791B



AGS791W

SINK KIT:

Space saving siphon, waste and pre-mounted hooks, rectangular overflow



For technical diagrams please refer to page 116-117



SINKS

WHAT IS GRANITEK?

Granitek is a word given when a bond between granite and acrylic resin is created. This has the best finished qualities in granite the sector. It gives you greater resistance against high temperatures, cracks, chips and is more resistant violent impacts

AGS812 One & One Third Bowl Sink

- Overall size (mm): 815 x 500
- Built-in hole size (mm): 800 x 480
- Bowl base sizes total (mm): 800
- Bowl depth (mm): 215 & 190
- Inset installation
- Anti-bacterial surface
- Designer waste plug

SINK KIT:
Space saving siphon, waste and pre-mounted hooks, rectangular overflow

AVAILABLE ACCESSORIES:
AVIO33O6 - Stainless Steel Colander

AGS592 One & One Half Bowl Sink

- Overall size (mm): 590 x 500
- Built-in hole size (mm): 575 x 492
- Bowl base sizes total (mm): 600
- Bowl depth (mm): 200 & 155
- Inset installation
- Anti-bacterial surface
- Designer waste plug

SINK KIT:
Space saving siphon, waste and pre-mounted hooks, rectangular overflow

AVAILABLE ACCESSORIES:
AVIO33O5 - Stainless Steel Colander



AGS812B



AGS592B



For technical diagrams please refer to page 116-117


WASH

SINKS

AGS611 Single Bowl Sink

- Overall size (mm): 610 x 500
- Built-in hole size (mm): 590 x 480
- Bowl base size (mm): 600
- Bowl depth external (mm): 200
- Bowl depth internal (mm): 190
- Inset installation
- Anti-bacterial surface
- Waste is 58mm to mixer
- Designer waste plug

AVAILABLE ACCESSORIES:
AGBO13O4 - Drain Rack



AGS611B



AGS611W

SINK KIT:
Space saving siphon, waste and pre-mounted hooks, rectangular overflow




For technical diagrams please refer to page 116-117

SINKS

AGS571
Single Bowl Sink

- Overall size (mm): 570 x 500
- Built-in hole size (mm): 550 x 480
- Bowl base size (mm): 600
- Bowl depth external (mm): 200
- Inset installation
- Anti-bacterial surface
- Waste is 58mm to mixer
- Designer waste plug

AVAILABLE ACCESSORIES:
AGBO13O4 - Drain Rack



WASH



AGS571B



AGS571W

SINK KIT:
Space saving siphon, waste and pre-mounted hooks, rectangular overflow


For technical diagrams please refer to page 116-117

SINKS

AGS411
Single Bowl Sink

- Overall size (mm): 410 x 500
- Built-in hole size (mm): 390 x 480
- Bowl base size (mm): 450
- Bowl depth external (mm): 190
- Inset installation
- Anti-bacterial surface
- Waste is 58mm to mixer
- Designer waste plug

AVAILABLE ACCESSORIES:
AGBO13O5 - Drain Rack



WASH



AGS411B




AGS411W

SINK KIT:
Space saving siphon, waste and pre-mounted hooks, rectangular overflow


For technical diagrams please refer to page 116-117




TECHNICAL INFORMATION

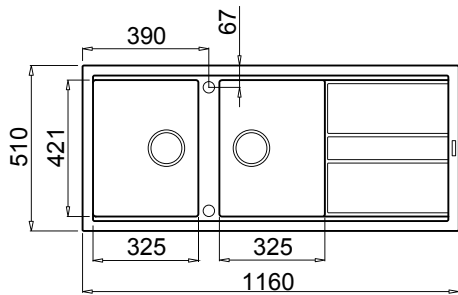


AGS1162

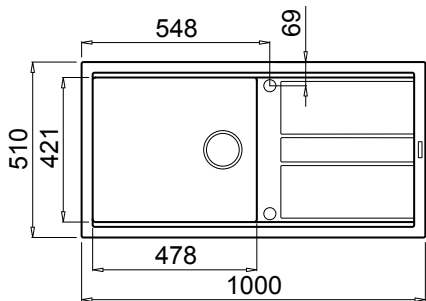


AGS1001

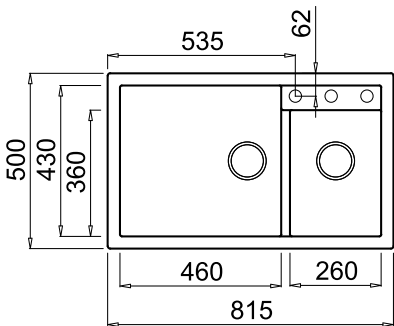


AGS812




AGS592

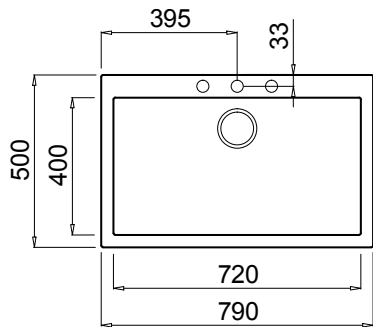


AGS791

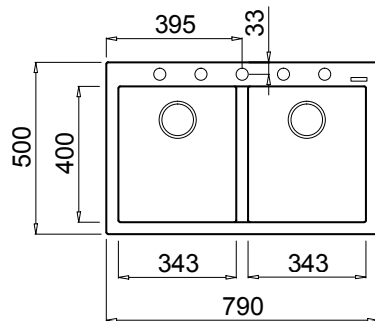


AGS792



AGS411




AGS571




AGS611

PLEASE NOTE:
All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.


TECHNICAL INFORMATION

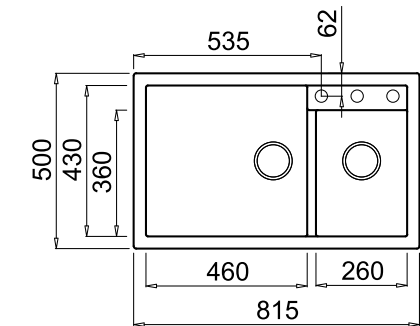


AGS812




AGS592



AGS411



AGS571



AGS611

PLEASE NOTE:
All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.

SINKS

PADDINGTON

single bowl + drainer

- Finish: AISI 304 satin finish
- 0.8mm thick stainless steel
- designer waste plug
- Available with left or right hand bowl
- Size: 860 x 500
- Bowl Size (mm): 410 x 410
- Bowl Depth (mm): 190
- Cut out (mm): 842 x 482
- Minimum Cabinet Size (mm): 500
- Installation: Inset



DEVON

double bowl + drainer

- Finish: AISI 304 satin finish
- 0.8mm thick stainless steel
- designer waste plug
- Available with left or right hand bowl
- Size: 1160 x 500
- Bowl Size (mm): both 345 x 400
- Bowl Depth (mm): 150 & 165
- Cut out (mm): 1140 x 482
- Minimum Cabinet Size (mm): 800
- Installation: Inset



For technical diagrams please refer to page 132-141



WASH

SINKS

FLEET

double bowl

- Finish: AISI 304 satin finish
- 1mm thick stainless steel
- designer waste plug
- Double bowl with two equal size bowls
- Size: 740 x 440
- Bowl Size (mm): both 340 x 400
- Bowl Depth (mm): 210
- Cut out (mm): 725 x 425
- Minimum Cabinet Size (mm): 800
- Installation: Inset or Slim top



COVENTERY

double bowl

- Finish: AISI 304 satin finish
- 0.8mm thick stainless steel
- designer waste plug
- Double bowl with two equal size bowls
- Size: 800 x 517
- Bowl Size (mm): both 360 x 460
- Bowl Depth (mm): 185
- Cut out (mm): 760 x 460
- Minimum Cabinet Size (mm): 860
- Installation: Under mount



For technical diagrams please refer to page 132-141

ACCESSORIES



B2O.42
chopping board



B3O.42
chopping board



G21.40 black
chopping board



G21.40 white
chopping board



CS16.39
colander



SINKS

WASH

BOND

single bowl

- Finish: AISI 304 satin finish
- 1mm thick stainless steel
- designer waste plug
- Deep single bowl
- Size: 440 x 440
- Bowl Size (mm): 400 x 400
- Bowl Depth (mm): 210
- Cut out (mm): 422 x 422
- Minimum Cabinet Size (mm): 450
- Installation: Inset or Slim top



STRAND

single bowl

- Finish: AISI 304 satin finish
- 1mm thick stainless steel
- designer waste plug
- Deep single bowl
- Size: 490 x 440
- Bowl Size (mm): 450 x 400
- Bowl Depth (mm): 210
- Cut out (mm): 472 x 422
- Minimum Cabinet Size (mm): 500
- Installation: Inset or Slim top



REGENT

single bowl

- Finish: AISI 304 satin finish
- 1mm thick stainless steel
- designer waste plug
- Deep single bowl
- Size: 588 x 435
- Bowl Size (mm): 548 x 395
- Bowl Depth (mm): 210
- Cut out (mm): 570 x 417
- Minimum Cabinet Size (mm): 600
- Installation: Inset or Slim top



For technical diagrams please refer to page 132-141

SINKS

WASH

EUSTON

single bowl

- Finish: AISI 304 polished finish
- 1mm thick stainless steel
- designer waste plug
- Deep single bowl
- Size: 604 x 504
- Bowl Size (mm): 550 x 395
- Bowl Depth (mm): 228
- Cut out (mm): 582 x 482
- Minimum Cabinet Size (mm): 600
- Installation: Inset or Slim top



PICCADILLY

single bowl

- Finish: AISI 304 polished finish
- 1mm thick stainless steel
- designer waste plug
- Deep single bowl
- Size: 794 x 504
- Bowl Size (mm): 745 x 400
- Bowl Depth (mm): 210
- Cut out (mm): 772 x 482
- Minimum Cabinet Size (mm): 800
- Installation: Inset or Slim top



OXFORD

one & three quarter bowl

- Finish: AISI 304 polished finish
- 1mm thick stainless steel
- designer waste plug
- Deep single bowl
- Size: 830 x 510
- Bowl Size (mm): 400 x 450 & 340 x 400
- Bowl Depth (mm): 228 & 210
- Cut out (mm): 812 x 492
- Minimum Cabinet Size (mm): 900
- Installation: Inset or Slim top



SINKS

WASH



ACCESSORIES



B2O.42 chopping board



B3O.42 chopping board



G21.40 black chopping board



G21.40 white chopping board



CS16.39 colander



For technical diagrams please refer to page 132-141

SINKS

WASH



ACCESSORIES



B2O.42
chopping board



B3O.42
chopping board



G21.40 black
chopping board



G21.40 white
chopping board



CS16.39
colander

SINKS

WASH

LIVERPOOL

single bowl with drainer

- Finish: AISI 304 satin finish
- 1mm thick stainless steel
- designer waste plug
- Deep single bowl
- Available with left or right-hand bowl (R / L)
- Size: 784 x 514
- Bowl Size (mm): 340 x 400
- Bowl Depth (mm): 203
- Cut out (mm): 765 x 495
- Minimum Cabinet Size (mm): 450
- Installation: Inset



PARK LANE

one & one half bowl with drainer

- Finish: AISI 304 satin finish
- 1mm thick stainless steel
- designer waste plug
- Deep single bowl
- Available with left or right-hand bowl (R / L)
- Size: 864 x 514
- Bowl Size (mm): 170 x 400 & 340 x 400
- Bowl Depth (mm): 153 & 203
- Cut out (mm): 772 x 482
- Minimum Cabinet Size (mm): 600
- Installation: Inset or Slim top



MAYFAIR

double bowl with drainer

- Finish: AISI 304 satin finish
- 1mm thick stainless steel
- designer waste plug
- Deep single bowl
- Available with left or right-hand bowl (R / L)
- Size: 1160 x 470
- Bowl Size (mm): both 340 x 400
- Bowl Depth (mm): 240 & 215
- Cut out (mm): 1130 x 470
- Minimum Cabinet Size (mm): 800
- Installation: Inset or Slim top



For technical diagrams please refer to page 132-141

SINKS

WASH

VINE

single bowl

- Finish: AISI 304 polished finish
- 0.80mm thick stainless steel
- designer waste plug
- Deep single bowl
- Volume (net): 45.49L
- Size: 612 x 462
- Bowl Size (mm): 556 x 403
- Bowl Depth (mm): 203
- Cut out (mm): 556 x 403
- Minimum Cabinet Size (mm): 600
- Installation: Inset or Slim top



BOW

single bowl

- Finish: AISI 304 satin finish
- 0.60mm thick stainless steel
- Designer waste plug
- Deep single bowl
- Volume (net): 27.23L
- Size: 445 x 385
- Bowl Size (mm): 420 x 360
- Bowl Depth (mm): 170
- Cut out (mm): 420 x 360
- Minimum Cabinet Size (mm): 450
- Installation: Inset or Slim top



For technical diagrams please refer to page 132-141




TAPS

ASM101B

gooseneck mixer tap

- electroplated matt black finish
- single lever control
- contemporary design
- swivel spout
- pin handle
- operating temperature: 1°C - 70°C
- 35mm ceramic disk cartridge
- 6 litres per minute
- 5 Star water rating

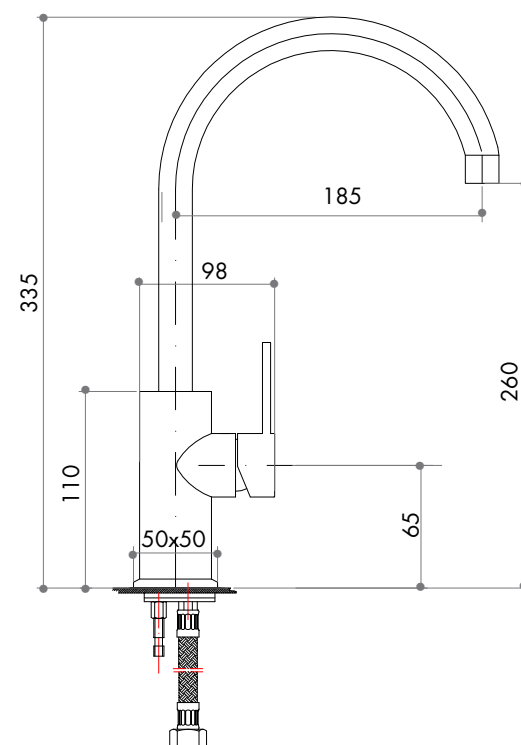


WASH

TAPS

ASM100X

gooseneck mixer tap

- brushed nickel finish
- single lever control
- contemporary design
- swivel spout
- pin handle
- operating temperature: 1°C - 70°C
- 35mm ceramic disk cartridge
- 6 litres per minute
- 5 Star water rating

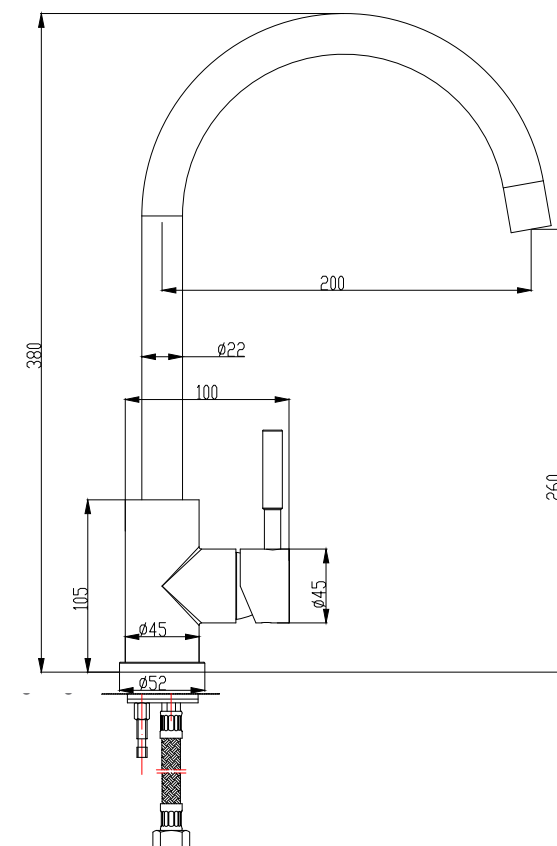

WASH




TAPS

ASM201B

gooseneck mixer tap with pull out hose

- electroplated matt black finish
- pull out lever control
- water 'spray' function
- contemporary design
- swivel spout
- pin handle
- operating temperature: 1°C - 70°C
- 25mm ceramic disk cartridge
- 4.5 litres per minute
- 6 Star water rating

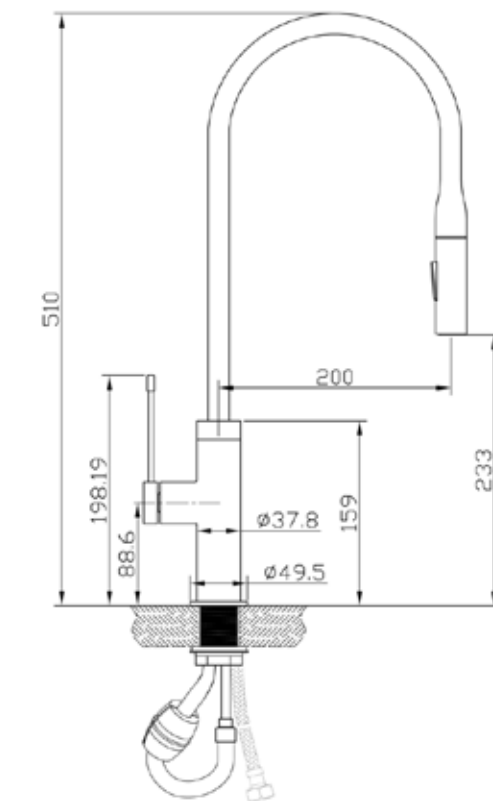


WASH

TAPS

ASM201X

gooseneck mixer tap with pull out hose













- brushed nickel finish
- pull out lever control
- water 'spray' function
- contemporary design
- swivel spout
- pin handle
- operating temperature: 1°C - 70°C
- 25mm ceramic disk cartridge
- 4.5 litres per minute
- 6 Star water rating

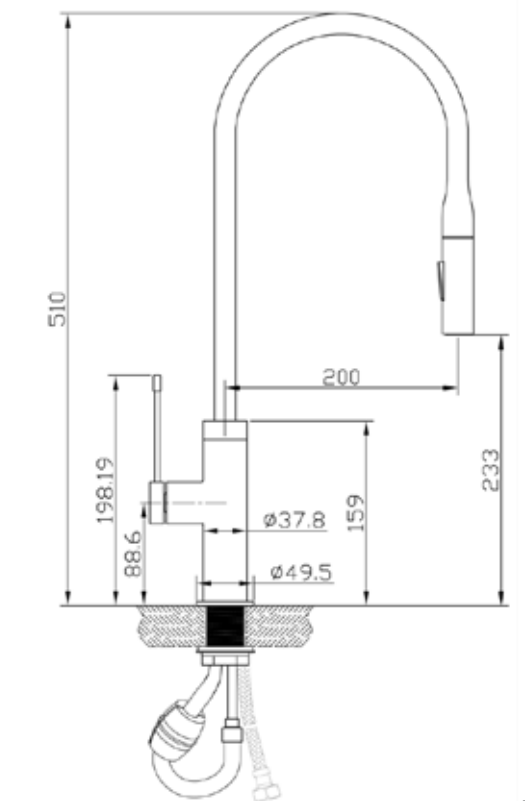

WASH















TECHNICAL INFORMATION

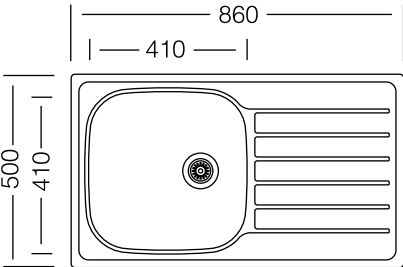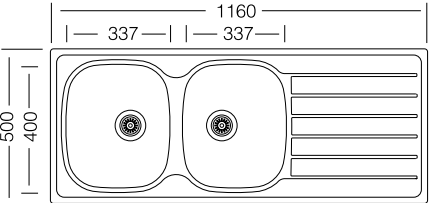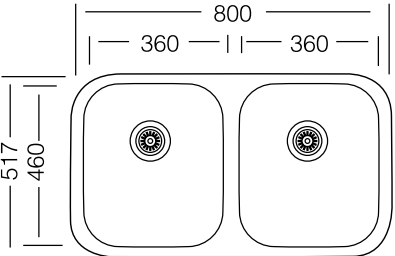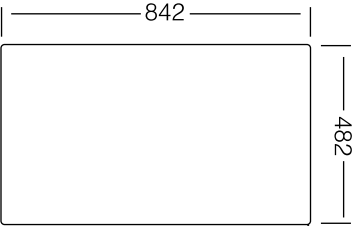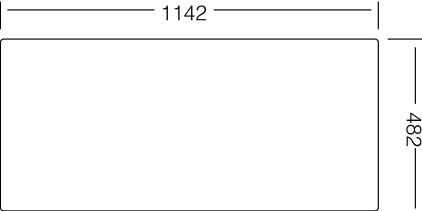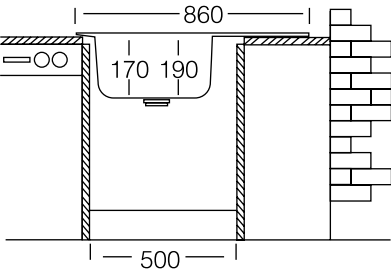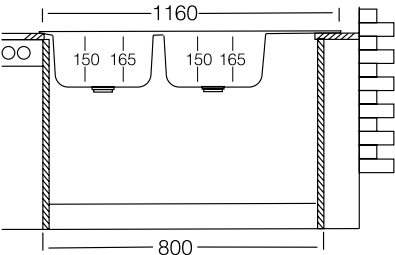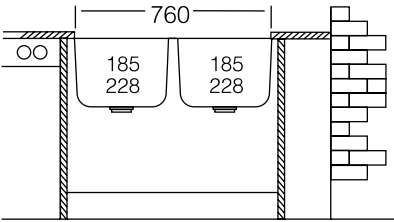INSTALLATION	PADDINGTON HY 860.500			DEVON HY 1160.500.20			FLEET MN 360.50.50		
	<div>INSET</div>  <div>Dimensions:(mm) 860 x 500</div>			<div>INSET</div>  <div>Dimensions:(mm) 1160 x 500</div>			<div>UNDERMOUNT</div>  <div>Dimensions:(mm) 800 x 517</div>		
									
									
MINIMUM CABINET SIZE									













PLEASE NOTE:
All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.

TECHNICAL INFORMATION

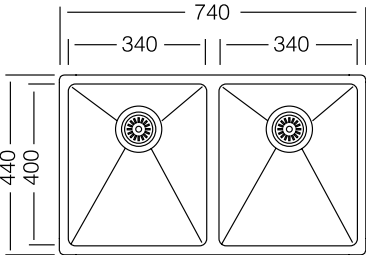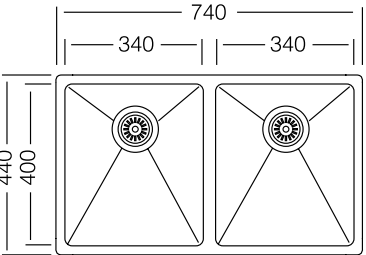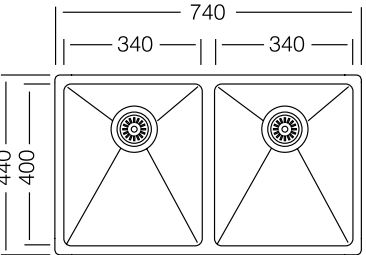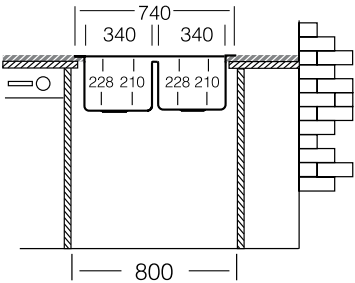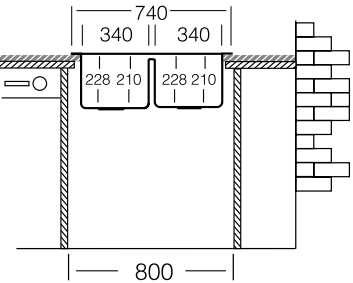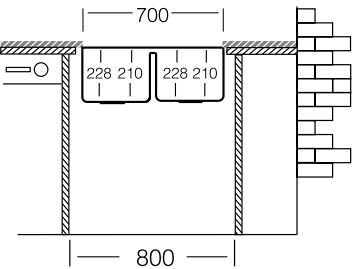COVENTRY MU 340.50.50		
<div>FLUSHMOUNT</div>  <div>Dimensions:(mm) 740 x 440</div>	<div>INSET SLIM TOP</div>  <div>Dimensions:(mm) 740 x 440</div>	<div>UNDERMOUNT</div>  <div>Dimensions:(mm) 740 x 440</div>
		
		
		













PLEASE NOTE:
All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.

TECHNICAL INFORMATION

INSTALLATION	BOND ME 400		
	FLUSHMOUNT	INSET SLIM TOP	UNDERMOUNT
			
	Dimensions:(mm) 440 x 440	Dimensions:(mm) 440 x 440	Dimensions:(mm) 440 x 440
OVERALL SIZE			
			
MINIMUM CABINET SIZE			

PLEASE NOTE:
All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.

TECHNICAL INFORMATION

INSTALLATION	STRAND ME 451		
	FLUSHMOUNT	INSET SLIM TOP	UNDERMOUNT
			
	Dimensions:(mm) 490 x 440	Dimensions:(mm) 490 x 440	Dimensions:(mm) 490 x 440
OVERALL SIZE			
			
MINIMUM CABINET SIZE			


PLEASE NOTE:
All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.

TECHNICAL INFORMATION

REGENT


ME 550

FLUSHMOUNT



Dimensions:(mm)
588 x 435

INSET SLIM TOP












Dimensions:(mm)
588 x 435

UNDERMOUNT



Dimensions:(mm)
588 x 435




TECHNICAL INFORMATION

EUSTON


ME 600.500

FLUSHMOUNT




Dimensions:(mm)
604 x 504

INSET SLIM TOP












Dimensions:(mm)
604 x 504

UNDERMOUNT



Dimensions:(mm)
600 x 500



PLEASE NOTE:

All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.

PLEASE NOTE:


All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.

TECHNICAL INFORMATION

PICCADILLY


ME 790.500

FLUSHMOUNT




Dimensions:(mm)
794 x 504

INSET SLIM TOP



Dimensions:(mm)
794 x 504

UNDERMOUNT












Dimensions:(mm)
790 x 500

INSTALLATION

OVERALL SIZE

CUTOUT SIZE

MINIMUM CABINET SIZE

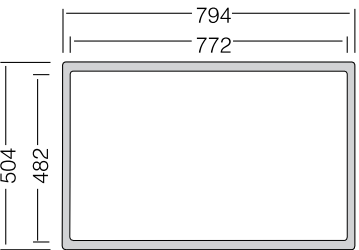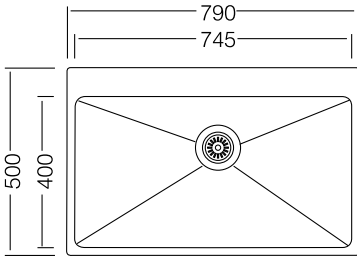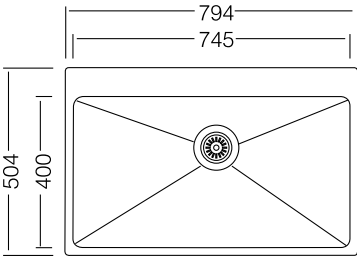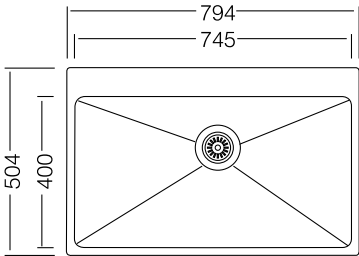

PLEASE NOTE:


All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.

TECHNICAL INFORMATION

OXFORD


ME 400.60.40

FLUSHMOUNT




Dimensions:(mm)
800 x 490

INSET SLIM TOP












Dimensions:(mm)
800 x 490

UNDERMOUNT











Dimensions:(mm)
800 x 490

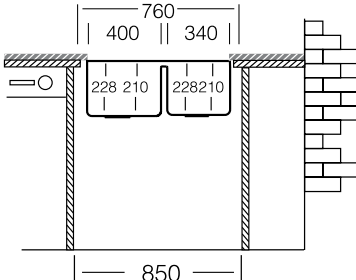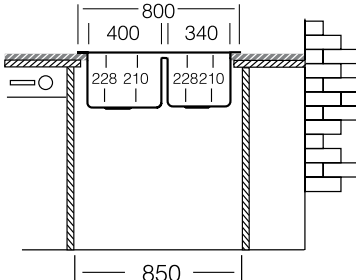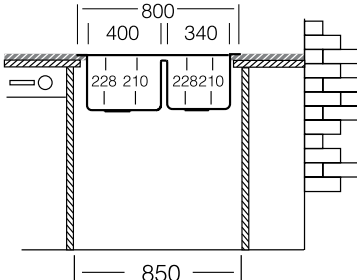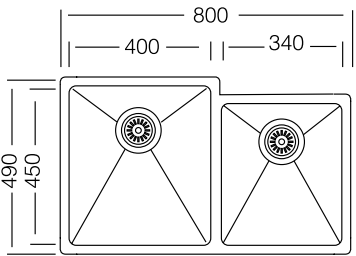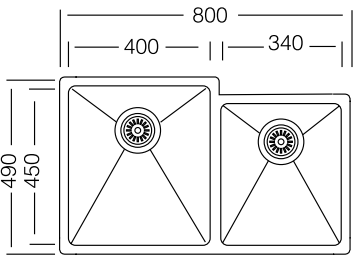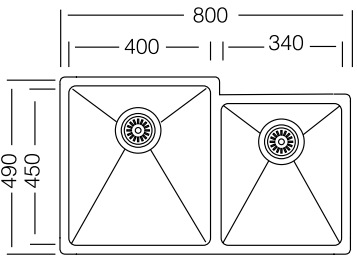

PLEASE NOTE:

All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.













TECHNICAL INFORMATION

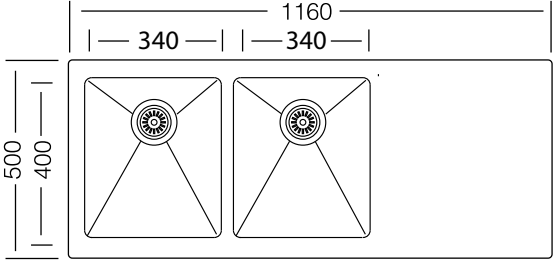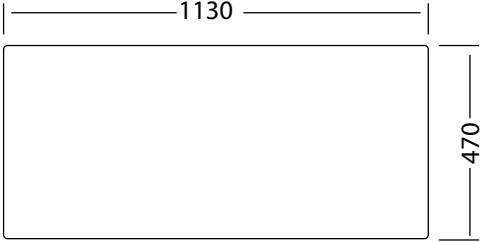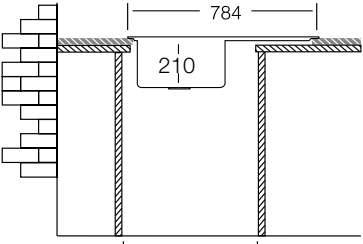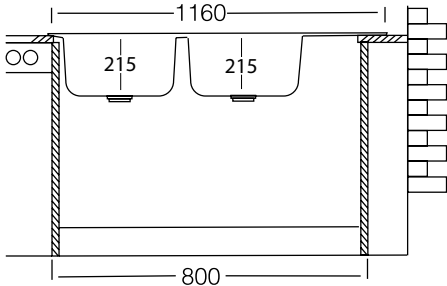INSTALLATION	LIVERPOOL MM 780.510.60		MAYFAIR MM 1160.510.20	
	<div>INSET SLIM TOP</div>  <div>Dimensions:(mm) 784 x 514</div>		<div>FLUSHMOUNT</div>  <div>Dimensions:(mm) 1160 x 500</div>	
				
				
MINIMUM CABINET SIZE				

PLEASE NOTE:

All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.

TECHNICAL INFORMATION

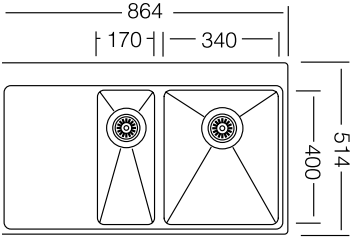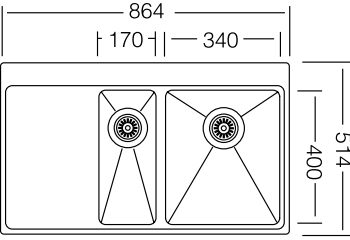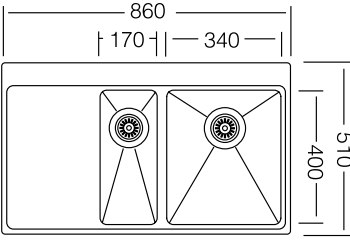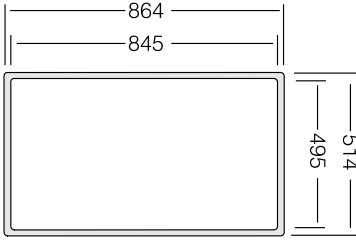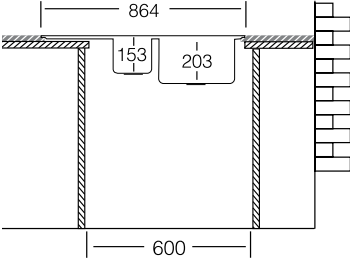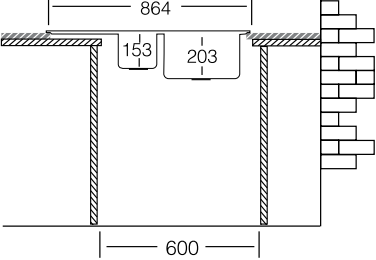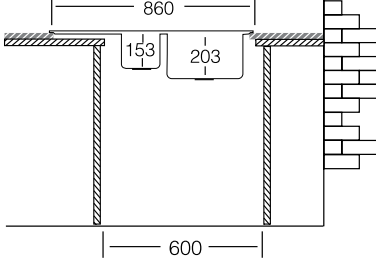PARK LANE MM 860.510.15		
<div>FLUSHMOUNT</div>  <div>Dimensions:(mm) 864 x 514</div>	<div>INSET SLIM TOP</div>  <div>Dimensions:(mm) 864 x 514</div>	<div>UNDERMOUNT</div>  <div>Dimensions:(mm) 860 x 510</div>
		
		
		

PLEASE NOTE:

All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.

DISHWASHERS




DISHWASHER

ADW7003 X & W
freestanding dishwasher

- Turbidity sensor: this dishwasher uses a soil sensor, referred to as a turbidity sensor. The turbidity sensor shines light through a small sampling of dishwater measuring sediment content and adjusts the dishwasher's cycle time and functions accordingly.
- Temperatures (°C)- auto-30°-40°-50°-60°-70°
- Hidden heating element
- Overflow, leakage protection & heater protection
- Asynchronous Circulation pump
- Prewash, Eco, Half load option (with 3 modes)
- Quick 30' 40°C, Super 50' 65°C
- Auto Delicate 30°C - 50°C, Auto Normal 50°C - 60°C, Auto Intensive 60°C - 70°C
- Start/Pause button, Program selection button
- Delay timer option (1 - 24hrs)
- Extra Hygiene & Dry option
- Rinse-aid indicator, Washing cycle indicators, End of cycle indicator
- Adjustable upper basket
- Number of mug shelves- 2
- Turbo Fan Drying system
- Noise Level (dB(A)) 47
- Tablet option
- Metal filter
- 3rd basket

For technical diagrams please refer to page 148-149
10 AMP GPO, standard 3-pin plug and cord; 240V

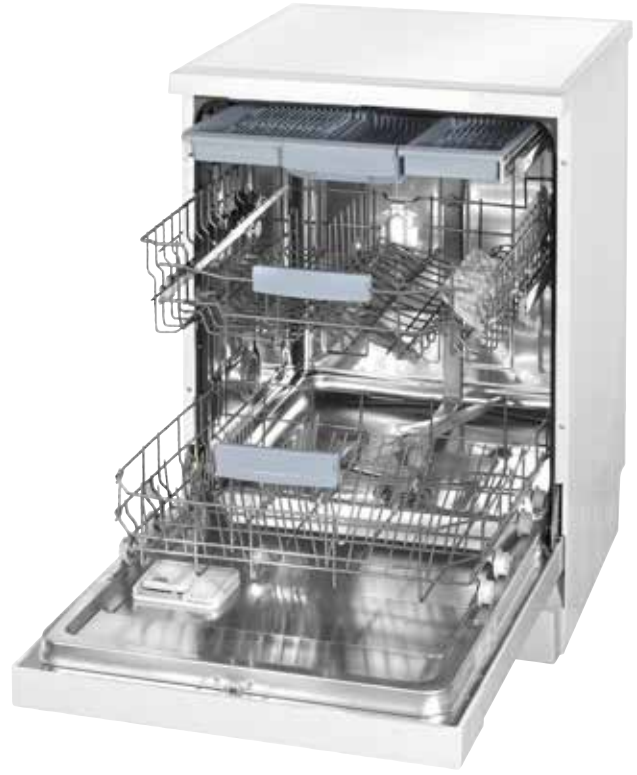

MADE IN EUROPE

24 MONTH WARRANTY

60CM

8 WASH PROGRAMS

PLACE SETTINGS

DELAY TIMER

DIGITAL DISPLAY

CHILD LOCK

LOW NOISE

PUSH BUTTON

ENERGY RATING

WATER RATING

ADW7003X

ADW7003W

WASH

DISHWASHER

ADW5001X
freestanding dishwasher

- stainless steel colour
- 12 place settings
- delay start option | 3-6-9-12 hours
- 49 dBA
- electronic control panel
- push-button control
- delay start function
- child lock
- start/pause
- 6 programs: intensive, heavy, ECO, 90-min, glass, rapid
- height-adjustable top basket
- flowmeter water sensor
- extra drying
- strong wash
- grey basket
- VDE hose

For technical diagrams please refer to page 148-149
10 AMP GPO; standard 3-pin plug and cord; 240V

24 MONTH WARRANTY

60CM

6 WASH PROGRAMS

PLACE SETTINGS

DELAY TIMER

CHILD LOCK

LOW NOISE

PUSH BUTTON

10AMP POWER CONNECTION

ENERGY RATING

WATER RATING

ADW5001X

ADW5002X
freestanding dishwasher

- 13 place settings
- Metal filter
- Stainless steel tub
- 4 wash programs (Quick 30, ECO, Super 50, Intensive)
- 3 wash temperatures
- Concealed heat element
- 'mini active' drying system
- Overflow and leakage protection
- Asynchronous circulation pump
- Start/Pause button
- Program selection knob
- Fold-able racks on lower basket
- Removable cutlery basket
- Delay timer up to 9 hours
- Half load wash option
- Wash tablet option
- Rinse aid indicator & Salt indicator
- Washing cycle indicator
- Adjustable upper basket
- 4 mug shelves
- Wine glass stem support
- Noise level: 49db/A

For technical diagrams please refer to page 148-149
10 AMP GPO; standard 3-pin plug and cord; 240V

MADE IN EUROPE

24 MONTH WARRANTY

60CM

4 WASH PROGRAMS

PLACE SETTINGS

DELAY TIMER

LOW NOISE

PUSH BUTTON

10AMP POWER CONNECTION

ENERGY RATING

WATER RATING

ADW5002X

DISHWASHER

ADWFI6O2

fully-integrated dishwasher

- Metal filter & stainless steel tub
- 6 programs (Mini 14 jet wash, Quick 30, ECO, Super 50, Hygiene, Auto-Intensive)
- 5 wash temperatures
- ‘super active’ drying system
- Overflow and leakage protection
- Asynchronous circulation pump
- Concealed display panel featuring remaining time and time delay settings
- Adjustable upper basket
- Program selection button
- Delay timer up to 19 hours
- Foldable racks on lower basket
- Removable cutlery basket
- Half load wash option
- Wash tablet option & Rinse aid indicator
- End of wash buzzer
- Noise level: 45db/A
- note: door and kick panels not supplied

 For technical diagrams please refer to page 148-149
10 AMP GPO, standard 3-pin plug and cord; 240V


ADWSI6O1X

semi-integrated dishwasher

- stainless steel control panel
- 12 place settings
- 6 wash programs
- push-button functions: Power, Programs, Function, Delay, Child lock, Start/Pause
- 49 dBA noise level
- electronic controls
- flow meter water sensor & anti flood device
- delay start 3/6/9/12 hours
- height-adjustable top basket
- rinse aid indicator
- natural drying + Extra drying
- child lock
- hot (max 90°C) or cold water connection
- VDE inlet hose: 1800mm , outlet hose: 1400mm
- note: door and kick panels not supplied

 For technical diagrams please refer to page 148-149
10 AMP GPO, standard 3-pin plug and cord; 240V

WASH

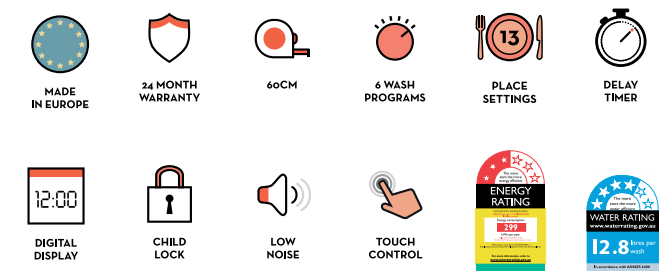


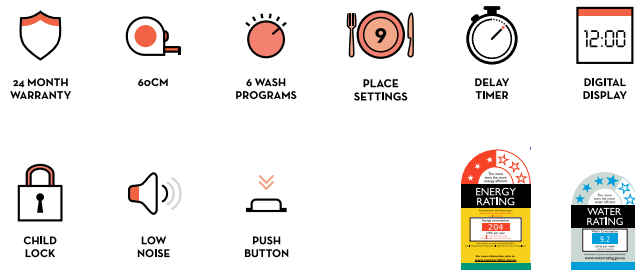
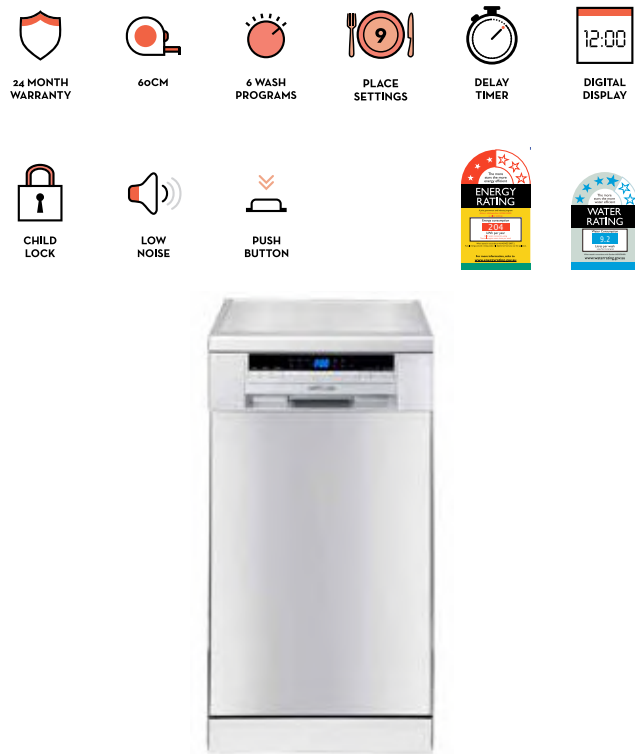
DISHWASHER

ADW45O0X


45cm-wide freestanding dishwasher

- 9 place settings
- stainless steel control panel
- electronic control panel with LED display
- 6 wash programs
- child lock
- height-adjustable upper basket
- 3-in-1 function
- 49 dBA noise level
- delay start 1–24 hours
- half wash option
- natural drying
- cold water connection
- 1500mm inlet & outlet hose

 For technical diagrams please refer to page 148-149
10 AMP, 3-pin plug




TECHNICAL INFORMATION

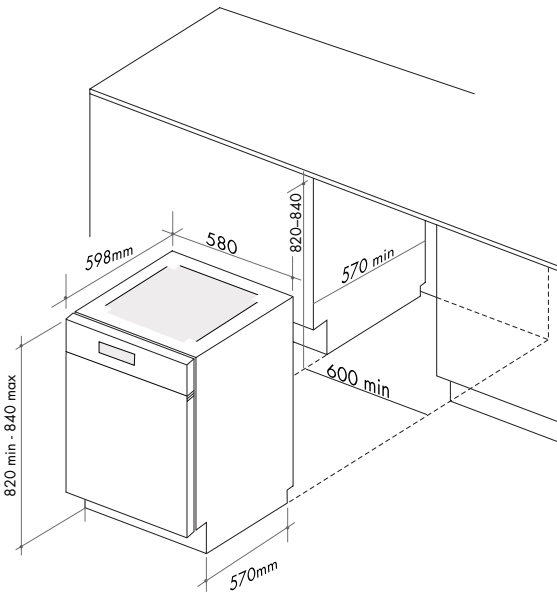


Note: For built-in installation, please remove the lid of the appliances. Refer to the installation manual


ADW7003

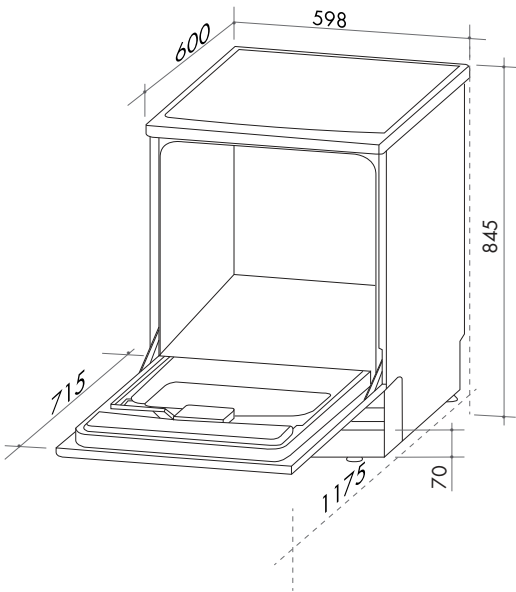


ADW5001X

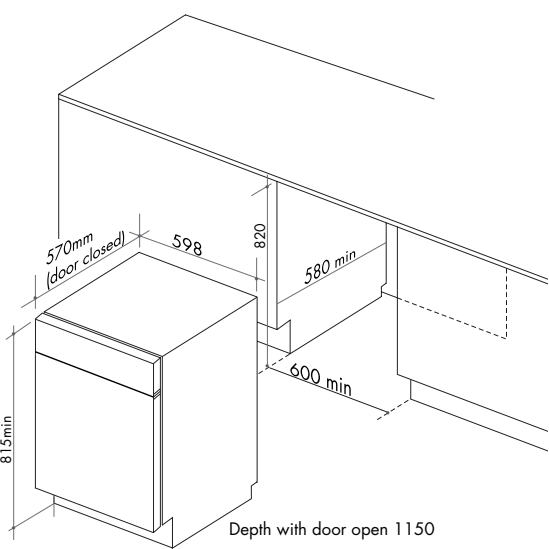


ADWSI601X

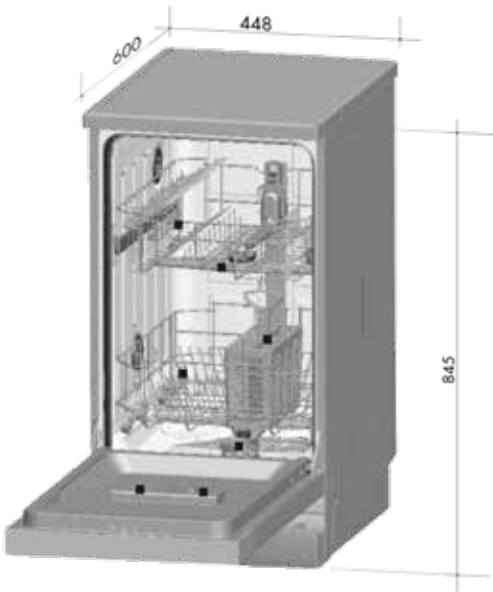

ADW4500X

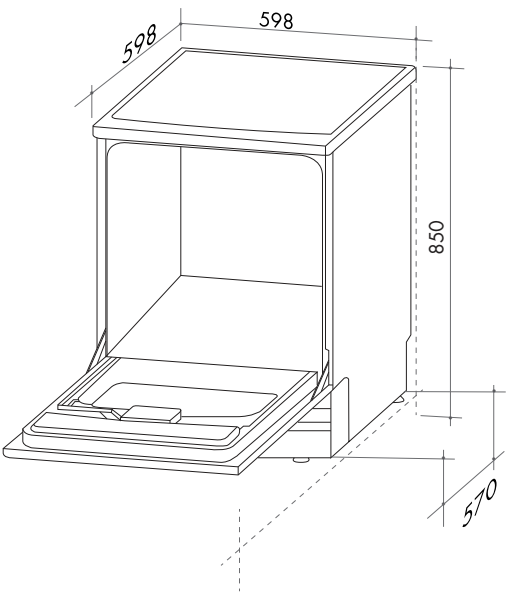

ADW5002X

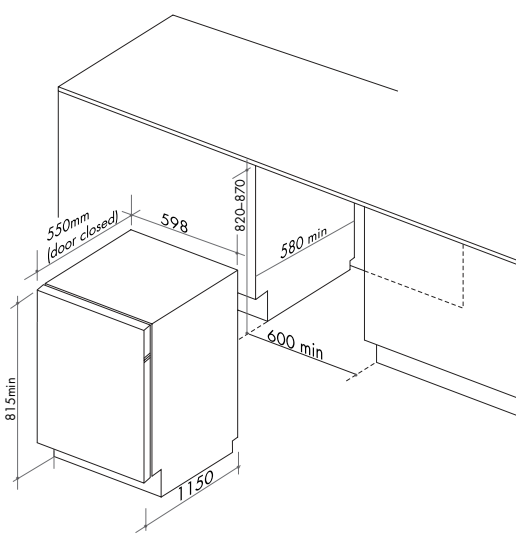

ADWFI602

PLEASE NOTE:
All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.

TECHNICAL INFORMATION

PLEASE NOTE:
All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.



LAUNDRY

LAUNDRY



WASH



LAUNDRY

AWD845W front-load 8kg washer & 4.5kg dryer

WASHER

- white enamel exterior
- capacitive touch control operation
- 15 programs
- ECO-Logic wash system
- time delay
- start and end time program
- stainless steel drum
- Maximum spin speed 1400 rpm
- spin speed setting
- active jet system
- ECO wash time feature
- washing cycle indicator
- LCD visual display for personal settings; language, brightness, contrast, buzzer sound & reset to factory settings
- time remaining indicator
- washing temperature setting
- real-time clock setting
- pre-wash function
- extra rinse mode
- easy ironing mode

DRYER

- 3 drying settings: cupboard, iron, hanger
- 30, 60 or 90 minute drying

SAFETY

- unbalance control system
- overflow protection
- failure detection system
- load sensor
- detergent dosage indicator
- foam protection


OVERALL FEATURES

- child lock
- cold water connection only
- removable top cover
- adjustable feet
- 3-pin 10 amp plug



For technical diagrams please refer to page 156
10 AMP, 3-pin plug

WASH

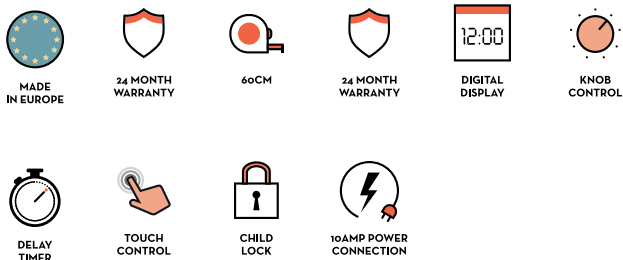

LAUNDRY


ACD45A & ACD60A

front-load clothes dryer

- white enamel
- 4.5kg dry weight capacity (ACD45A)
- 6kg dry weight capacity (ACD60A)
- PTC quick dry heating element
- stainless steel drum
- inner drum speed: 50 rpm
- automatic overheat cut off
- easy-to-clean double-layer flint filter
- high-speed rotating turbo fan
- automatic disinfection
- child safety lock
- auto stop when door opened
- thermostat: 60°C
- <6% residual water
- drying time setting: 0–200 minutes
- centrifugal blast type motor
- mechanical controls
- upright floor mounted
- upside-down wall mounted
- input power: 800–1400W
- heating power: 700/1300W
- motor output power: 90W
- drum dimensions: 560x304mm
- net weight: 20kg
- direct ducting: rear vent for optional fitting of supplied flexible ducting kit
- one-way drum rotation

For technical diagrams please refer to page 156
220–240 V, 50Hz
2.2m power cord with 3-pin 10 AMP plug

DRYING CAPACITY	DRYING TIME	
	Regular (minutes)	Airing (minutes)
approx 1kg	approx 30	approx 55
approx 2kg	approx 60	approx 110
approx 3kg	approx 120	
approx 4kg	approx 200	

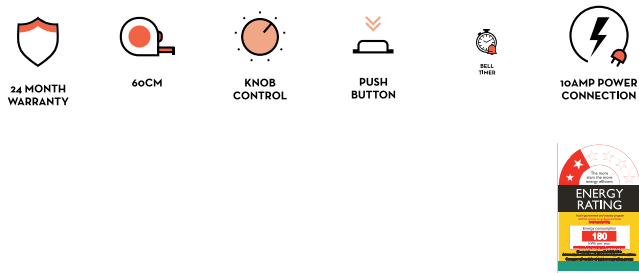

DRYING CAPACITY	DRYING TIME (approx)	
	Regular (minutes)	Airing (minutes)
approx 2kg	30	55
approx 3kg	60	110
approx 4.5kg	200	120
approx 6kg		200

WASH


LAUNDRY

ATT8W & ATT10W

8kg & 10kg twin tub washing machines

- white plastic exterior
- 8kg washing & 5.5kg spin capacity or 10kg washing & 6.5kg spin capacity
- 2 inlet holes for washing and spinning
- 1 inlet hose
- 1 drain hose
- washing time: 15 minutes
- spinning time: 5 minutes
- 3 control knobs
- 6-star Pulsatar & water pump
- washing mode selector (Gentle, Normal and Powerful)
- washing timer knob
- spin timer knob
- safety switch for spin tub
- anti-rust plastic body
- lint filter
- spin-dry basket
- 3-pin 10 amp plug


For technical diagrams please refer to page 156
10 AMP, 3-pin plug

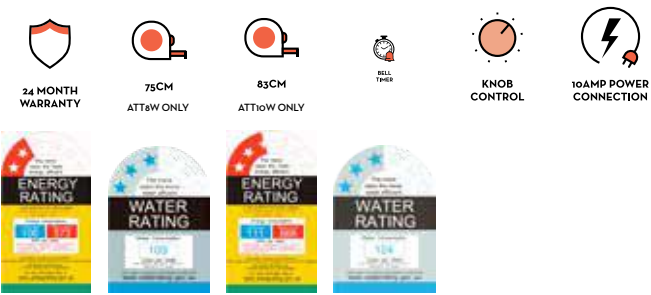


WASH

TECHNICAL INFORMATION

NOTES

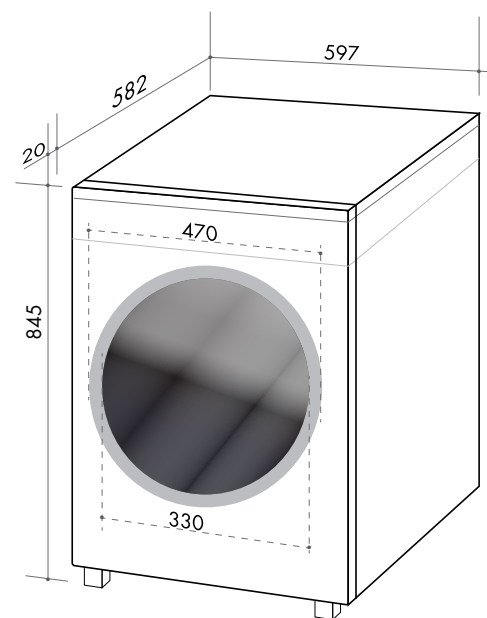


AWD845W

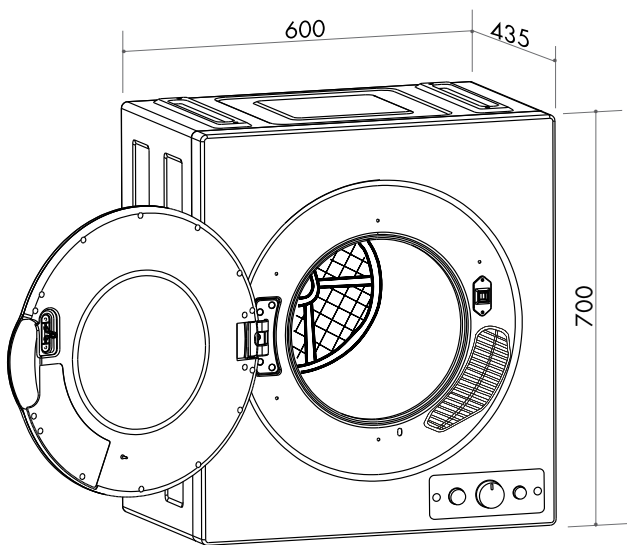


For wall mounting instructions, please refer to the operation and installation manual

ACD45A & ACD60A

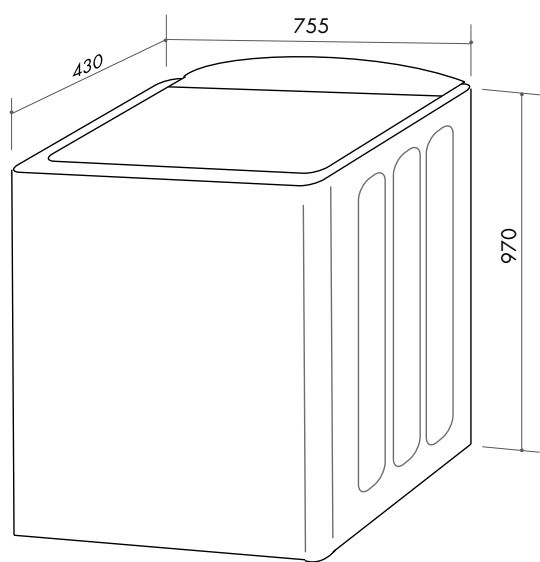

ATT8W

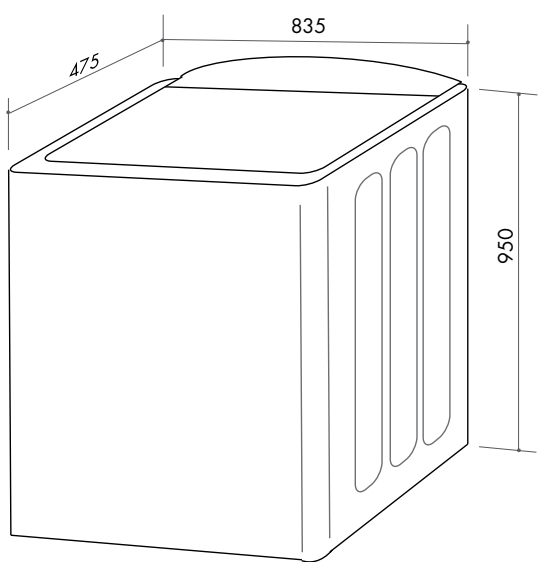

ATT10W

PLEASE NOTE:
All technical drawings are supplied as a general reference only. They are not to scale and are provided as a guide only. For detailed instructions, please refer to your user guide. All cutouts should only be made after physical measurement of the appliance. Appliances that require hard wiring and/or plumbing should be installed by professional tradesmen.



**NOW WITH
5 YEAR
WARRANTY**

SIMPLY REGISTER
YOUR ARTUSI APPLIANCE AT
ARTUSI.COM.AU

*CONDITIONS APPLY

SHOWROOMS AND OFFICES

P: 1300 694 583

NEW SOUTH WALES (HEAD OFFICE)

48 Moore Street
LEICHHARDT

VICTORIA

1211 Toorak Road
CAMBERWELL

QUEENSLAND

1/42 Cavendish Road
COORPAROO

WESTERN AUSTRALIA

10/55 Howe Street
OSBORNE PARK

ARTUSI.COM.AU