

60cm Front Vent Recirculating RANGEHOOD

PRODUCT CODE: **EVR60FVSS 2**



eurocooking




Warranty

INSTALLATION DIAGRAM

FEATURES:

- + Ducted or recirculating options
- + Stainless steel front fascia with two panel size options
 - + Standard panel size: 40mm (separate in box)
 - + Wider panel size: 80mm (Fitted on unit)
- + Twin motors
- + 400m³/hr extraction capacity
- + 1.5W LED
- + Aluminium grease filter
- + 120mm flue diameter
- + Decibel rating: 47 - 69 dBA
- + Carbon filters supplied with unit (Model No. CFM60FVSS - Requires 2)

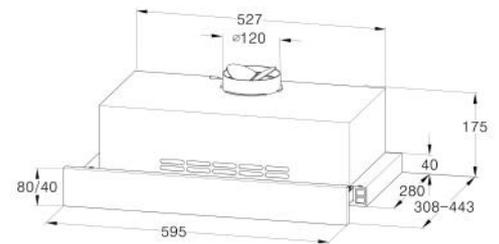

DUCTED OR RECIRCULATING OPTIONS

This rangehood can be vented as standard or has the option of recirculated venting, with its front vented capabilities. If installing as a recirculating rangehood, you must use the 80mm front fascia which is supplied as standard.

DISHWASHER SAFE CASSETTE FILTERS

The cassette filter has 5 aluminium layers, it can be placed in a dishwasher for easy cleaning and can easily be removed and re-connected from the rangehood.

HIGH EXTRACTION CAPACITY

The extraction capacity of 400m³/hr provides strength and power to this stylish rangehood.

QUIET NOISE LEVEL

A very quiet motor ensures the rangehood has a very quiet noise level.

HELPFUL TIPS

- + Leave your rangehood on for 15 minutes after the cooking of the food to remove all odors, steam etc.
- + The dishwasher-safe cassette filters need to be cleaned after approximately 2 months of standard operation
- + It is recommended that the rangehood be installed between 650mm and 750mm above the cooktop
- + It is also recommended that fumes from the rangehood be ducted out into the atmosphere.
- + Turn off the rangehood before attempting to clean

INSTALLATION

Installation is recommended by a qualified installer, please refer to the product manual for full installation instructions.

FILTER CLEANING INFORMATION

Cassette mesh filter: Requires cleaning monthly. This will ensure no interruptions with airflow operation.

Electrical Requirements	Rangehood is supplied with 10amp cord & plug.
Decibel Rating	47 - 69dBA
Available Ventilation Kits	
RHKE65EU	Wall – Eave vent kit
RHKMR65EU	Universal metal roof kit (includes flashing)
RHKTR65EU	Universal tile roof kit (includes flashing)
Product Dimensions	W850mm x D290mm
Weight	9.00kg (net) / 10.20kg (gross)
Barcode	9347726021690