

KINVARO

T-71 lift-up flap fitting



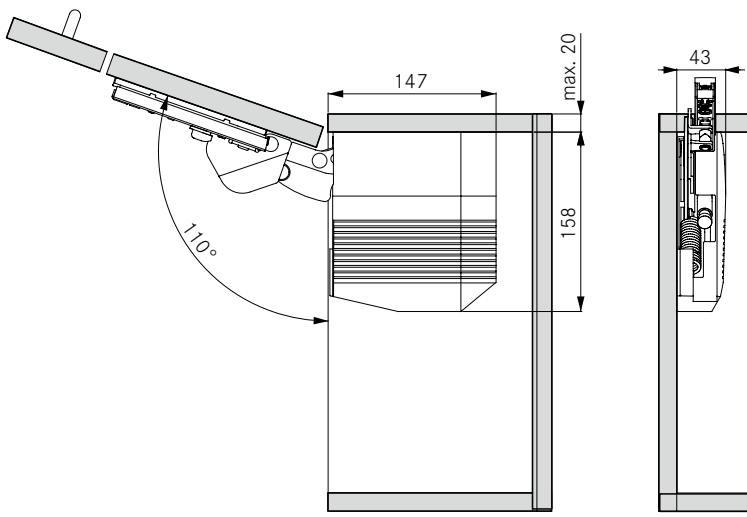
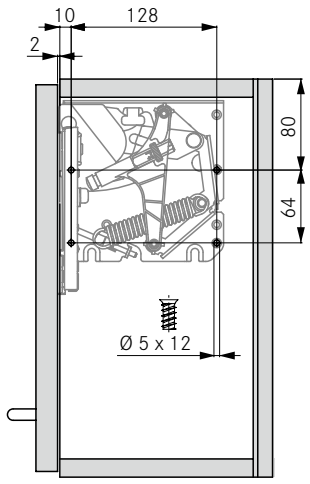
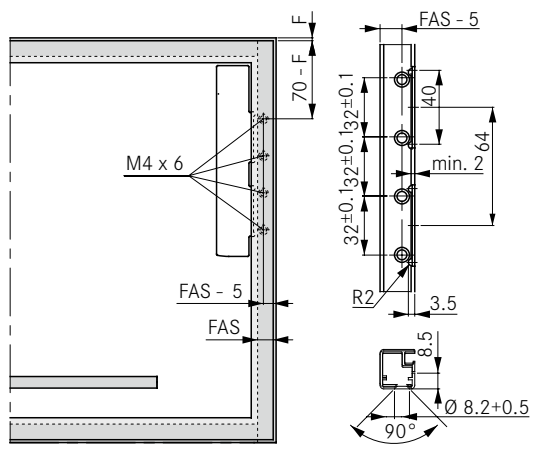
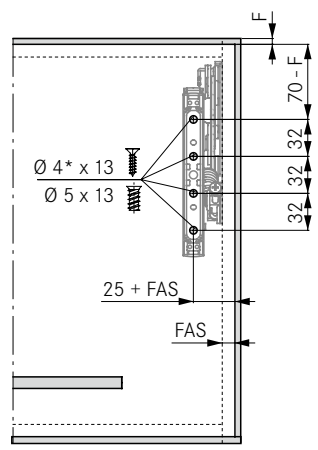
- Variable opening angle - holds flap securely at any angle between 45° and 110°
- Extremely comfortable opening thanks to spring-supported opening mechanism
- Adjustable spring force
- Integrated adjustable closing damper
- Flap 3-dimensionally adjustable - height, side, angle: direct adjustment ± 1.5 mm
- No hinges fitted to the top panel
- Allows additional cabinet installation above
- Can be used for wooden flaps or aluminium frames with glass infill
- Fast, tool-free clip fitting of the front
- Weight 1.4 to 8.5 kg
- Range of flaps:
 - Width: up to 1200 mm
 - Height: 300 – 600 mm
- Cover caps in white and grey, similar to RAL 7045

APPLICATION RANGE

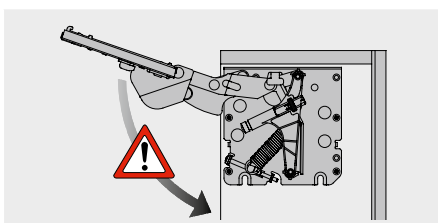
| Cabinet height | Flap weight incl. handle (kg) | |
|----------------|-------------------------------|----------------|
| | Spring, white | Spring, orange |
| 300 | 2.1 – 7.4 | 2.5 – 8.5 |
| 350 | 1.8 – 6.3 | 2.3 – 7.5 |
| 400 | 1.7 – 5.4 | 2.1 – 6.8 |
| 450 | 1.6 – 4.7 | 2.0 – 5.8 |
| 500 | 1.5 – 4.0 | 1.8 – 5.0 |
| 550 | 1.4 – 3.7 | 1.6 – 4.6 |
| 600 | 1.4 – 3.3 | 1.4 – 4.2 |

ASSEMBLY AND INSTALLATION INSTRUCTIONS

All dimensions in millimetres

| | |
|--|---|
| <p>Required space</p>  | <p>Side wall drilling positions</p>  |
| <p>Front: installation for flaps with standard aluminium frame profiles (19 mm)</p>  <p style="text-align: right;">* Standard aluminium frame profile (19 mm)</p> | <p>Front: installation for wooden and frame flaps (min. 55 mm width)</p>  <p style="text-align: right;">* Pre-drilling required - Ø 2 mm</p> |
| <p>Calculation of flap weight</p> <p>Flap width x flap height x flap thickness x density¹ + weight of handle² = weight of flap</p> <p>¹ Densities: MDF 0.85 kg/dm³, chipboard 0.65 kg/dm³, spruce/pine 0.45 kg/dm³</p> <p>² For bar handles allow 0.1 kg for each 100 mm handle width. We recommend a trial fitting</p> | |

WARNING



Important!
Caution - risk of injury!
Fitting is spring-tensioned!

LEGEND

F Reveal
FAS Front overlay, side