KINVARO

T-76 lift-up flap fitting



- Variable opening angle holds flap securely at any angle between 45° and 110°
- Extremely comfortable opening thanks to spring-supported opening mechanism
- Adjustable spring force
- Integrated adjustable closing damper
- Flap with 3-dimensional adjustment height, side, angle: direct adjustment ±1.5 mm
- · No hinges fitted to the top panel
- · Allows additional cabinet installation
- Fast, tool-free clip fitting of the front
- Weight 5.2 to 11.0 kg

- Range of flaps: Width: up to 1200 mm Height: 400-600 mm
- · Cover caps in grey, similar to RAL 7045





APPLICATION RANGE

Cabinat baight	Flap weight incl. handle (kg)				
Cabinet height	Spring, standard				
400	7.0-11.0				
450	6.7-9.6				
500	5.8-8.5				
550	5.6-7.6				
600	5.2-7.0				

ORDER INFORMATION

Kinvaro T-76 set



Designation	Springs	Version for	Overlay	Art. No.		
Designation					Cover cap, grey	
Kinvaro T-76 On right without damper and on left with damper, standard pre-assembled springs, incl. cover caps	Standard	Wood	Variable		F151147 706	


Kinvaro T-76 set consisting of:

- 1 Fitting on right without damper and on left with damper (1x)
- 2 Cover caps, right and left (1x)
- 3 Mounting plates (2x) Paper template (1x)

Installation instructions (1x)

PAGE REFERENCES


Kinvaro T-76 adjustment options	280
Assembly aids	656




		ı	3		6. Do	000

ASSEMBLY AND INSTALLATION INSTRUCTIONS

All dimensions in millimetres

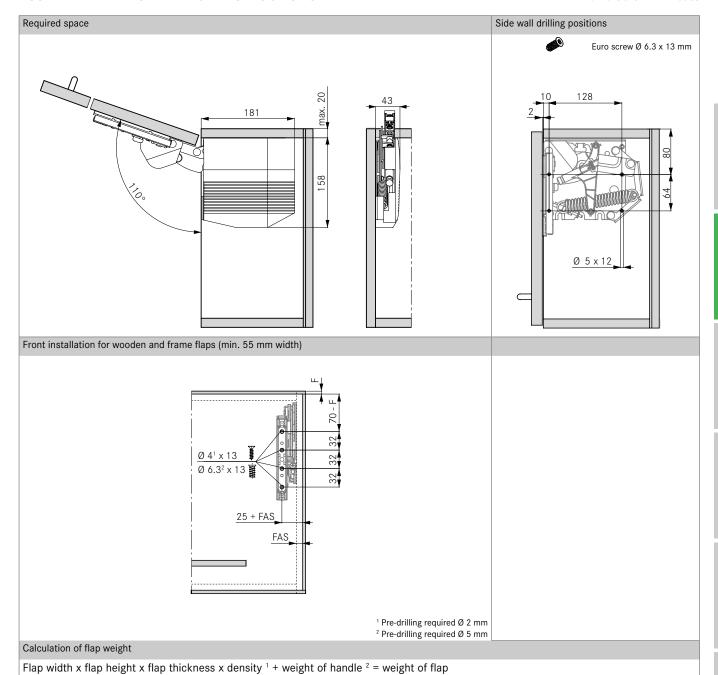

WARNING



 1 Densities: MDF board 0.85 kg/dm³, chipboard 0.65 kg/dm³, spruce/pine 0.45 kg/dm³ 2 For bar handles, allow 0.1 kg per 100 mm of handle length. We recommend a trial fitting

Important!
Caution — risk of injury!
Fitting is spring-tensioned!

LEGEND

F Reveal FAS Front overlay, side

8